

YIOSI

INSTALLATION GUIDE

Crystal Ring Chandelier

CHANDELIER · CEILING MOUNT

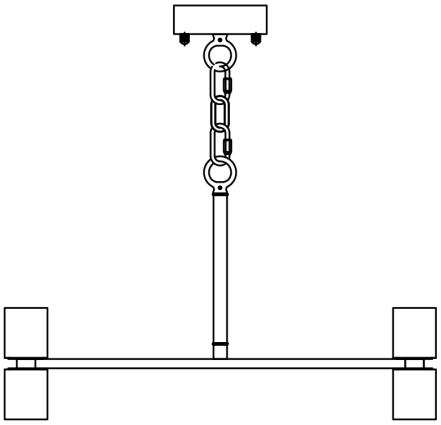

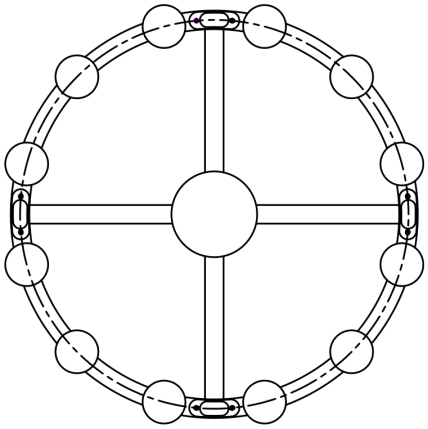

Model **YIOSI-0387** · **YIOSI-0388** · **YIOSI-0389** · **YIOSI-0390** · **YIOSI-0902** · **YIOSI-0903**

Please read this guide completely before you begin, and keep it for future reference.

BEFORE YOU BEGIN

⚠ **WARNING**

- **Turn off the power at the circuit breaker** before installing, changing bulbs or cleaning the fixture.
- Installation by a **qualified electrician** is recommended. Install in accordance with local electrical codes.
- This fixture uses one G4 bulb per shade (supplied with one spare). Replace only with bulbs of the same type and rating.
- Do not clean the fixture with corrosive substances such as gasoline or alcohol-based disinfectants.
- Use this fixture only for its intended purpose. Do not modify or rewire it.
- Keep small parts and packaging away from children. They can cause serious injury.


PREPARATION

- Read every step carefully and follow them in order.
- Unpack and check all parts against the parts list. If anything is missing or damaged, contact us before installing (see the last page). We will send replacement parts promptly.
- Assemble the fixture where it will be installed. Moving it mid-assembly risks losing small parts.

SPECIFICATIONS

LIGHT SOURCE	SIZES	MOUNTING
G4 bulbs, one per shade (included)	**48" / 60" / 70.1"**	**Ceiling, adjustable chain**

IN THE BOX

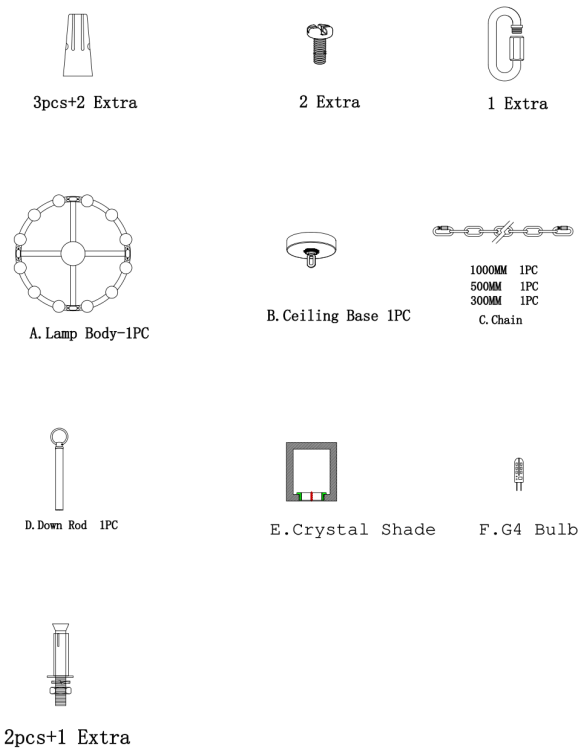


PART	QTY	DESCRIPTION
A	× 1	Lamp body
B	× 1	Ceiling base (canopy)
C	× 3	Chain (1000 / 500 / 300 mm)
D	× 1	Down rod
E	× n+1	Crystal shade (one per light, plus a spare)
F	× n+1	G4 bulb (one per light, plus a spare)
—	× 3+2	Wire connector (incl. spares)
—	× 2	Spare screw
—	× 1	Spare quick link
—	× 2+1	Screw with wall anchor (incl. spare)

INSTALLATION

STEP 1

Assemble the lamp body


Thread the power cord through the down rod (D) and screw the rod onto the lamp body (A). Choose a chain (C) of the length you want, connect the rod to the ceiling base (B) with it, and feed the power cord into the ceiling base.

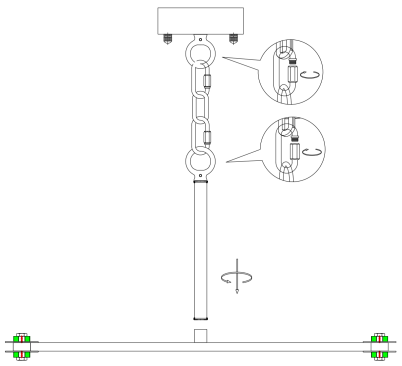

STEP 2

Mount the plate and connect the wires


Turn off the power at the circuit breaker. Take the mounting plate out of the ceiling base and fix it to the ceiling junction box. Join the fixture wires to the matching house supply wires with the wire connectors (supplied): live to live, neutral to neutral, ground to ground. Lift the ceiling base to the plate and tighten the fixing screws.

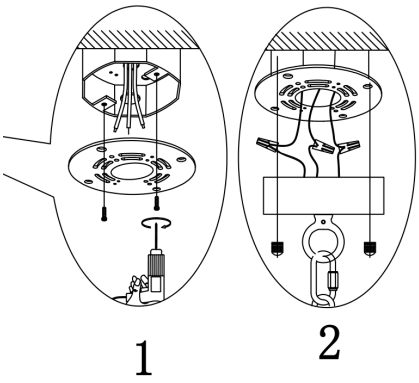

STEP 3

Fit the bulbs and shades

Insert a G4 bulb (F) into each lamp holder and fit the crystal shades (E) as shown. Restore power and switch on to test.

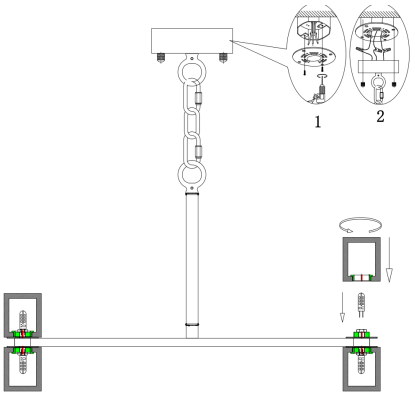

CARE & SUPPORT

CLEANING & CARE

- Clean the fixture about once a month to keep it looking its best.
- Turn off the power and let the fixture cool to room temperature first.
- Wipe with a soft cloth dampened with water and wrung dry. Never spray liquid directly onto the fixture.
- Do not use gasoline, alcohol or other corrosive cleaners.

GOOD TO KNOW

- Use the fixture only as designed. Damage caused by modification, third-party parts or natural disasters is not covered.
- Warranty terms are listed at yiosilamp.com.

NEED HELP?

support@yiosilamp.com

+1 970-896-9411

Missing parts, installation questions or anything else, we are here to help. Please include your order number and a photo of the issue so we can resolve it quickly.