
YIOSI

INSTALLATION GUIDE

14" Modern Alabaster Wall Sconce

WALL SCONCE · WALL MOUNT

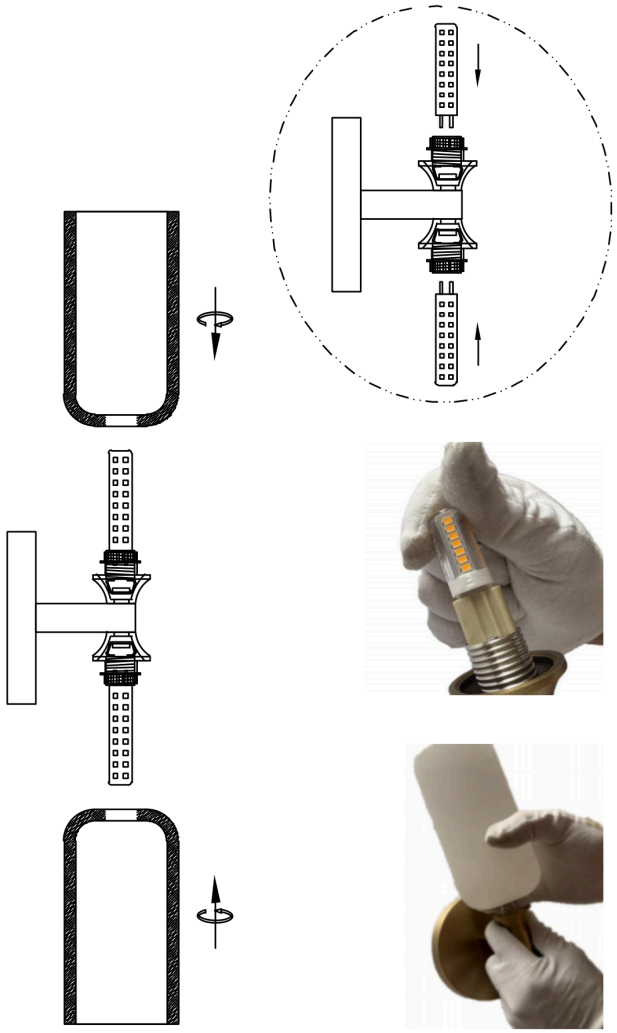

Model **YIOSI-0395** · **YIOSI-0396**

Please read this guide completely before you begin, and keep it for future reference.

BEFORE YOU BEGIN

⚠ **WARNING**

- **Turn off the power at the circuit breaker** before installing, changing bulbs or cleaning the fixture.
- Installation by a **qualified electrician** is recommended. Install in accordance with local electrical codes.
- This fixture takes two G9 bulbs. Use bulbs of the rating shown (3 W, 3000K) or lower.
- Do not clean the fixture with corrosive substances such as gasoline or alcohol-based disinfectants.
- Use this fixture only for its intended purpose. Do not modify or rewire it.
- Keep small parts and packaging away from children. They can cause serious injury.


PREPARATION

- Read every step carefully and follow them in order.
- Unpack and check all parts against the parts list. If anything is missing or damaged, contact us before installing (see the last page). We will send replacement parts promptly.
- Assemble the fixture where it will be installed. Moving it mid-assembly risks losing small parts.

SPECIFICATIONS

LIGHT SOURCE	BULB RATING	MOUNTING
2 × G9 bulbs	**3 W each, 3000K**	**Wall, over a junction box**

IN THE BOX

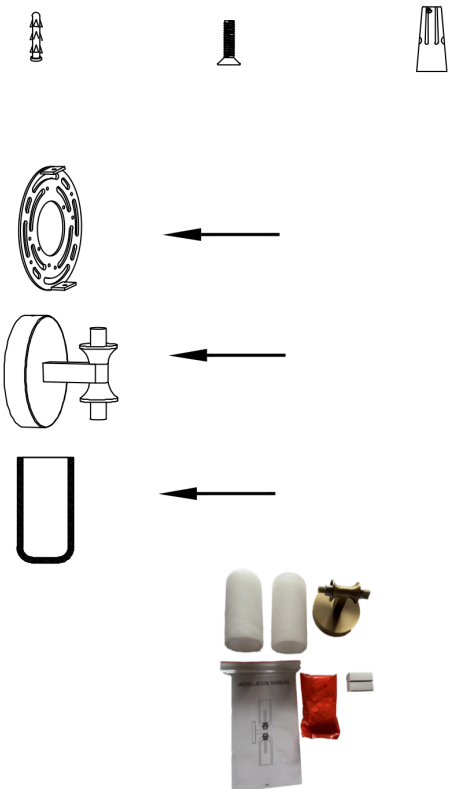


PART	QTY	DESCRIPTION
A	× 1	Mounting plate
B	× 1	Lamp body
C	× 2	Alabaster shade
—	× 4	Wall anchor
—	× 4	Screw
—	× 3	Wire connector

INSTALLATION

STEP 1

Mount the plate


Turn off the power at the circuit breaker. Remove the mounting plate (A) from the lamp body and fix it to the wall or junction box with the wall anchors and screws.

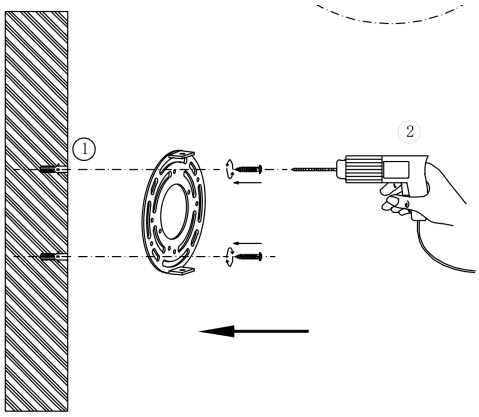

STEP 2

Connect and attach the lamp body


Join the fixture wires to the matching house supply wires with the wire connectors: live to live, neutral to neutral, ground to ground. Tuck the connections into the junction box, then fit the lamp body (B) over the plate and lock it in place.

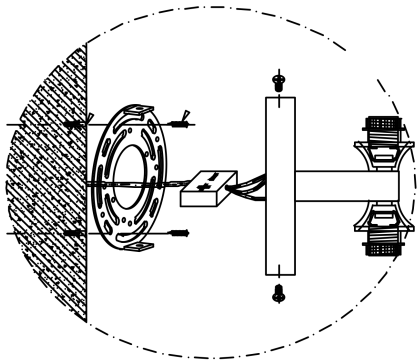

STEP 3

Fit the bulbs and alabaster shades

Screw a G9 bulb into the lamp holder at the top and at the bottom. Turn an alabaster shade (C) onto each end. Restore power and switch on to test.

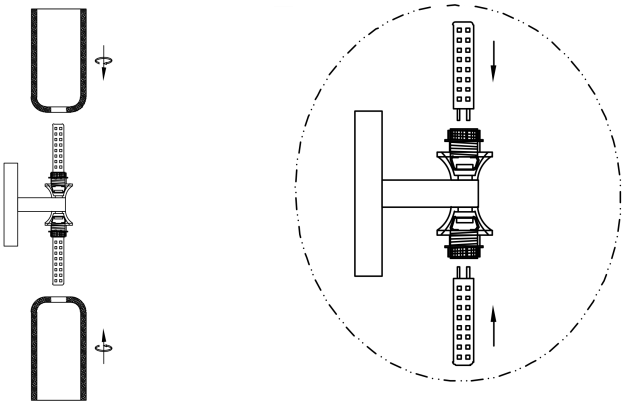

CARE & SUPPORT

CLEANING & CARE

- Clean the fixture about once a month to keep it looking its best.
- Turn off the power and let the fixture cool to room temperature first.
- Wipe with a soft cloth dampened with water and wrung dry. Never spray liquid directly onto the fixture.
- Do not use gasoline, alcohol or other corrosive cleaners.

GOOD TO KNOW

- Use the fixture only as designed. Damage caused by modification, third-party parts or natural disasters is not covered.
- Warranty terms are listed at yiosilamp.com.
- Natural alabaster varies piece to piece. Veining and tone differences are part of its character.

NEED HELP?

support@yiosilamp.com

+1 970-896-9411

Missing parts, installation questions or anything else, we are here to help. Please include your order number and a photo of the issue so we can resolve it quickly.