
YIOSI

INSTALLATION GUIDE

50" 25-Light Glass Raindrop Linear Chandelier

LINEAR CHANDELIER · CEILING MOUNT

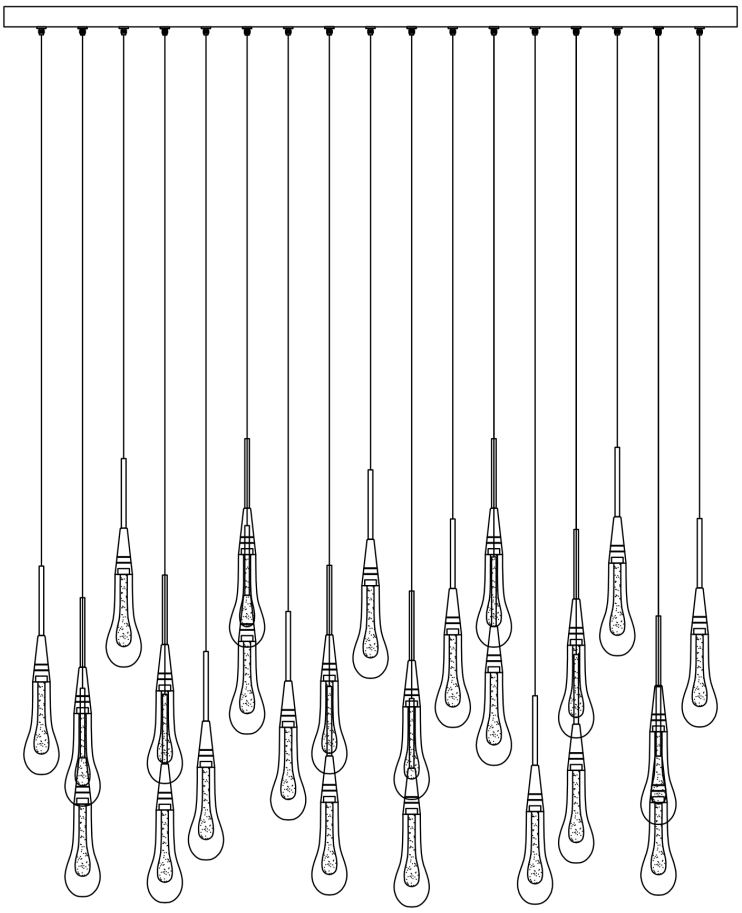

Model **YIOSI-0420**

Please read this guide completely before you begin, and keep it for future reference.

BEFORE YOU BEGIN

⚠ **WARNING**

- **Turn off the power at the circuit breaker** before installing, changing bulbs or cleaning the fixture.
- Installation by a **qualified electrician** is recommended. Install in accordance with local electrical codes.
- This fixture takes 25 G4 LED bulbs (2 W, 2700K each). Do not exceed the rated wattage.
- Do not clean the fixture with corrosive substances such as gasoline or alcohol-based disinfectants.
- Use this fixture only for its intended purpose. Do not modify or rewire it.
- Keep small parts and packaging away from children. They can cause serious injury.


PREPARATION

- Read every step carefully and follow them in order.
- Unpack and check all parts against the parts list. If anything is missing or damaged, contact us before installing (see the last page). We will send replacement parts promptly.
- Assemble the fixture where it will be installed. Moving it mid-assembly risks losing small parts.

SPECIFICATIONS

LIGHT SOURCE	BULB RATING	MOUNTING
25 × G4 LED bulbs	**2 W each, 2700K**	**Ceiling, adjustable cable drops**

IN THE BOX

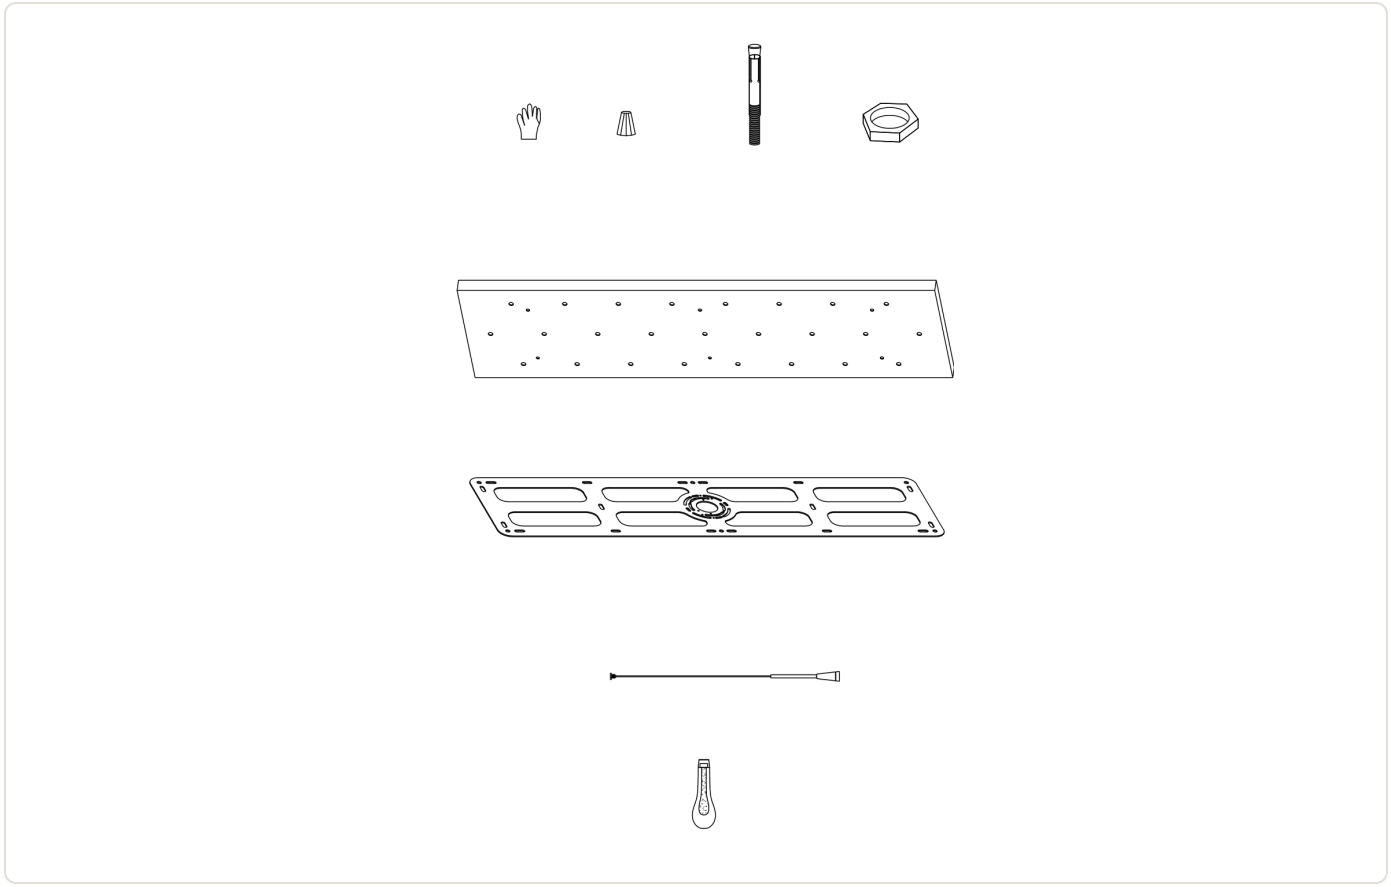


PART	QTY	DESCRIPTION
A	× 1	Canopy (lamp plate)
—	× 1	Mounting plate
B	× 26	Lamp holder with cable (incl. 1 spare)
C	× 26	Glass raindrop (incl. 1 spare)
—	× 2	Glove
—	× 4	Wire connector
—	× 6	Expansion bolt
—	× 6	Nut

INSTALLATION

STEP 1

Prepare the canopy


Take the accessory kit out of the box and have a power drill ready. Remove the fasteners that hold the mounting plate to the canopy (A) and take the mounting plate out. Untie the ties around the cables so the drops can be adjusted later.

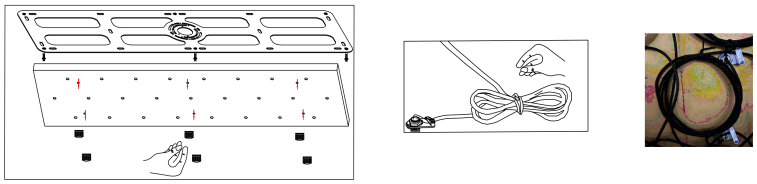

STEP 2

Mount the plate


Turn off the power at the circuit breaker. Fix the mounting plate to the ceiling with the expansion bolts, making sure the support can carry the weight of the fixture.

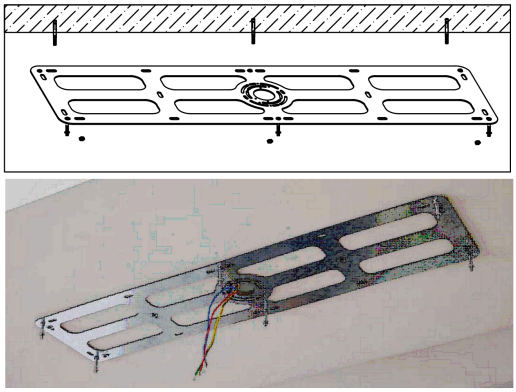

STEP 3

Connect the wires and fix the canopy


Join the fixture wires to the matching house supply wires with the wire connectors: live to live, neutral to neutral, ground to ground. Tuck the connections into the junction box, then lift the canopy (A) onto the mounting plate and secure it with the nuts.

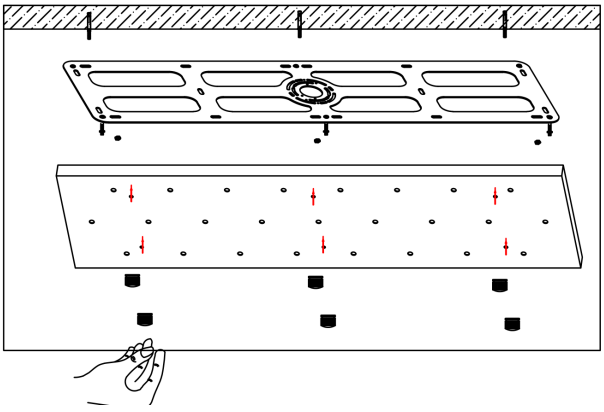

STEP 4

Set the cable lengths


To change the drop of a light, loosen the cable grip under the canopy, press it gently and pull the cable to the length you want. Arrange the drops in a staggered pattern, as shown.

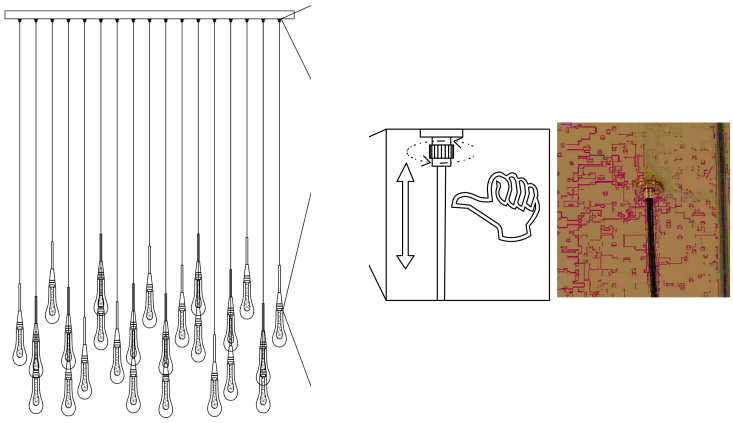

STEP 5

Fit the bulbs and glass

Push a G4 bulb into each lamp holder (B), then fit a glass raindrop (C) onto each holder. Restore power and switch on to test.

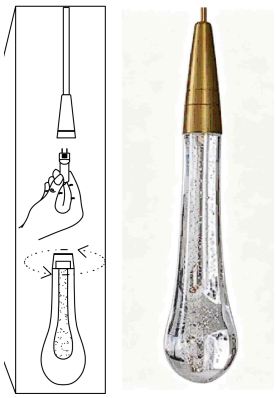

CARE & SUPPORT

CLEANING & CARE

- Clean the fixture about once a month to keep it looking its best.
- Turn off the power and let the fixture cool to room temperature first.
- Wipe with a soft cloth dampened with water and wrung dry. Never spray liquid directly onto the fixture.
- Do not use gasoline, alcohol or other corrosive cleaners.

GOOD TO KNOW

- Use the fixture only as designed. Damage caused by modification, third-party parts or natural disasters is not covered.
- Warranty terms are listed at yiosilamp.com.

NEED HELP?

support@yiosilamp.com

+1 970-896-9411

Missing parts, installation questions or anything else, we are here to help. Please include your order number and a photo of the issue so we can resolve it quickly.