
YIOSI

INSTALLATION GUIDE

Anello Linear Alabaster Wall Sconce

WALL SCONCE · WALL MOUNT

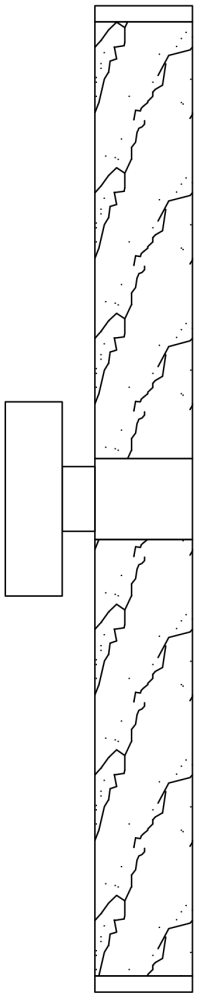

Model **YIOSI-0421** · **YIOSI-0422**

Please read this guide completely before you begin, and keep it for future reference.

BEFORE YOU BEGIN

⚠ **WARNING**

- **Turn off the power at the circuit breaker** before installing, changing bulbs or cleaning the fixture.
- Installation by a **qualified electrician** is recommended. Install in accordance with local electrical codes.
- Integrated LED, 24 W. No bulbs to replace.
- Do not clean the fixture with corrosive substances such as gasoline or alcohol-based disinfectants.
- Use this fixture only for its intended purpose. Do not modify or rewire it.
- Keep small parts and packaging away from children. They can cause serious injury.


PREPARATION

- Read every step carefully and follow them in order.
- Unpack and check all parts against the parts list. If anything is missing or damaged, contact us before installing (see the last page). We will send replacement parts promptly.
- Assemble the fixture where it will be installed. Moving it mid-assembly risks losing small parts.

SPECIFICATIONS

LIGHT SOURCE	WATTAGE	MOUNTING
Integrated LED strip	**24 W, 2700K**	**Wall, over a junction box**

IN THE BOX

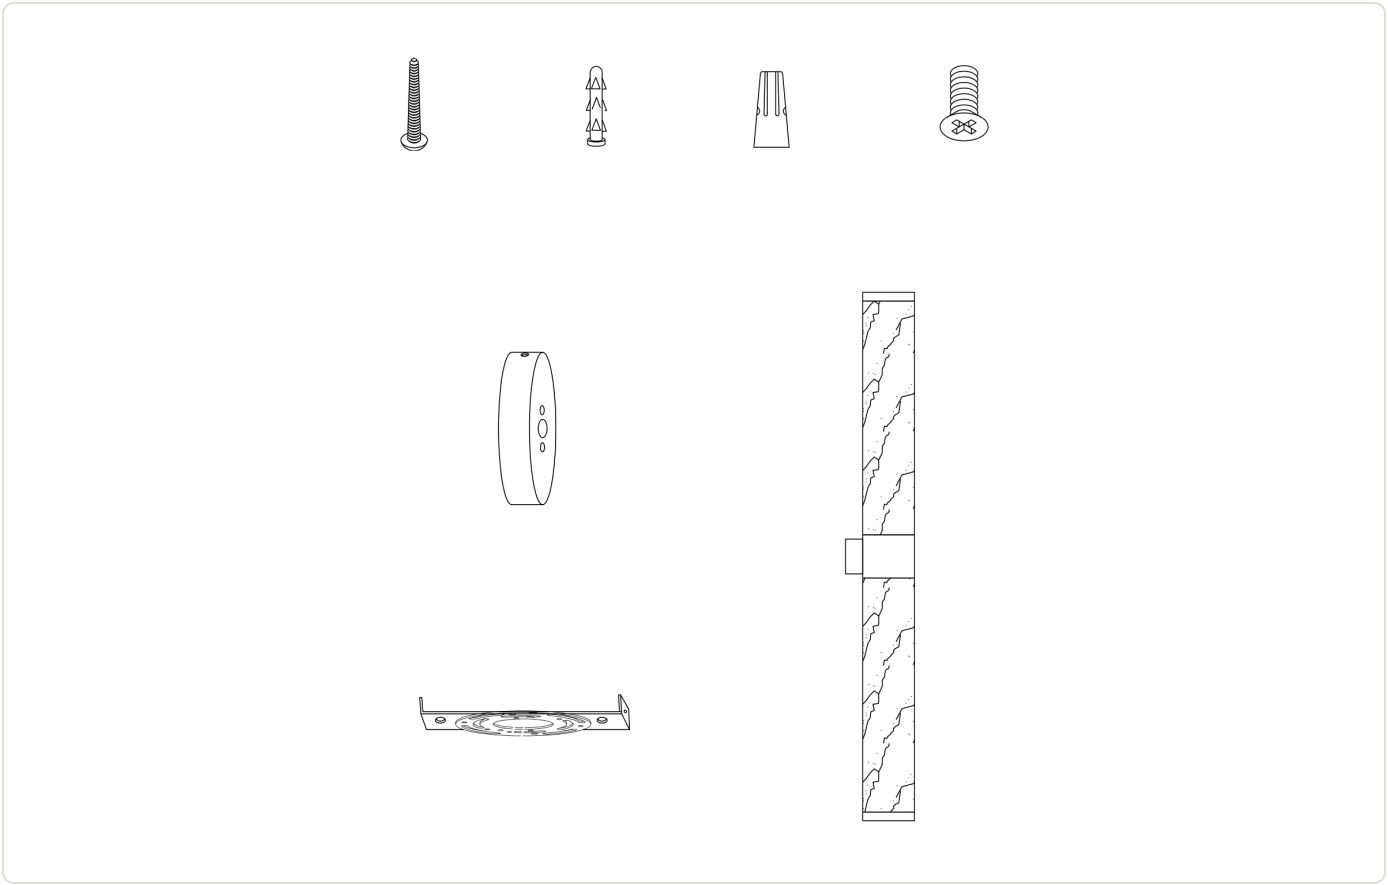


PART	QTY	DESCRIPTION
A	× 1	Wall box
B	× 1	Lamp body
—	× 1	Mounting plate
—	× 4	Wood screw (incl. 2 spare)
—	× 4	Wall anchor (incl. 2 spare)
—	× 4	Wire connector (incl. 1 spare)
—	× 3	Machine screw (incl. 1 spare)

INSTALLATION

STEP 1

Remove the mounting plate


Take the lamp body (B) and the accessory kit out of the box and have a power drill ready. Undo the two screws that hold the mounting plate to the wall box (A) and take the plate out.

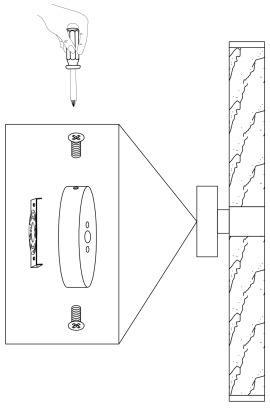

STEP 2

Mount the plate


Turn off the power at the circuit breaker. Fix the mounting plate to the wall junction box with the wood screws, using the wall anchors where needed.

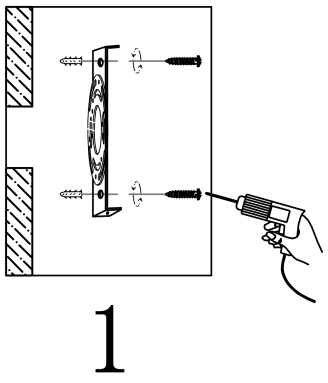

STEP 3

Connect the wires and fix the wall box

Join the fixture wires to the matching house supply wires with the wire connectors: live to live, neutral to neutral, ground to ground. Fit the wall box (A), with the lamp body attached, over the plate and fasten it with the top and bottom screws. Restore power and test.

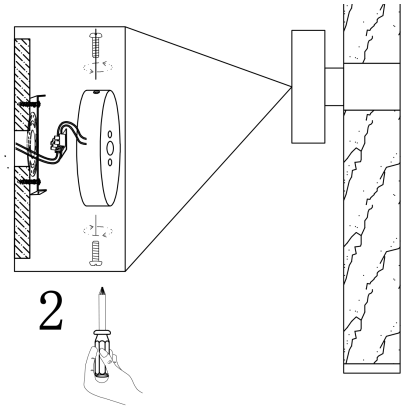

CARE & SUPPORT

CLEANING & CARE

- Clean the fixture about once a month to keep it looking its best.
- Turn off the power and let the fixture cool to room temperature first.
- Wipe with a soft cloth dampened with water and wrung dry. Never spray liquid directly onto the fixture.
- Do not use gasoline, alcohol or other corrosive cleaners.

GOOD TO KNOW

- Use the fixture only as designed. Damage caused by modification, third-party parts or natural disasters is not covered.
- Warranty terms are listed at yiosilamp.com.
- Natural alabaster varies piece to piece. Veining and tone differences are part of its character.

NEED HELP?

support@yiosilamp.com

+1 970-896-9411

Missing parts, installation questions or anything else, we are here to help. Please include your order number and a photo of the issue so we can resolve it quickly.