
YIOSI

INSTALLATION GUIDE

47" 6-Light Ginkgo Leaf Linear Chandelier

CHANDELIER · CEILING MOUNT

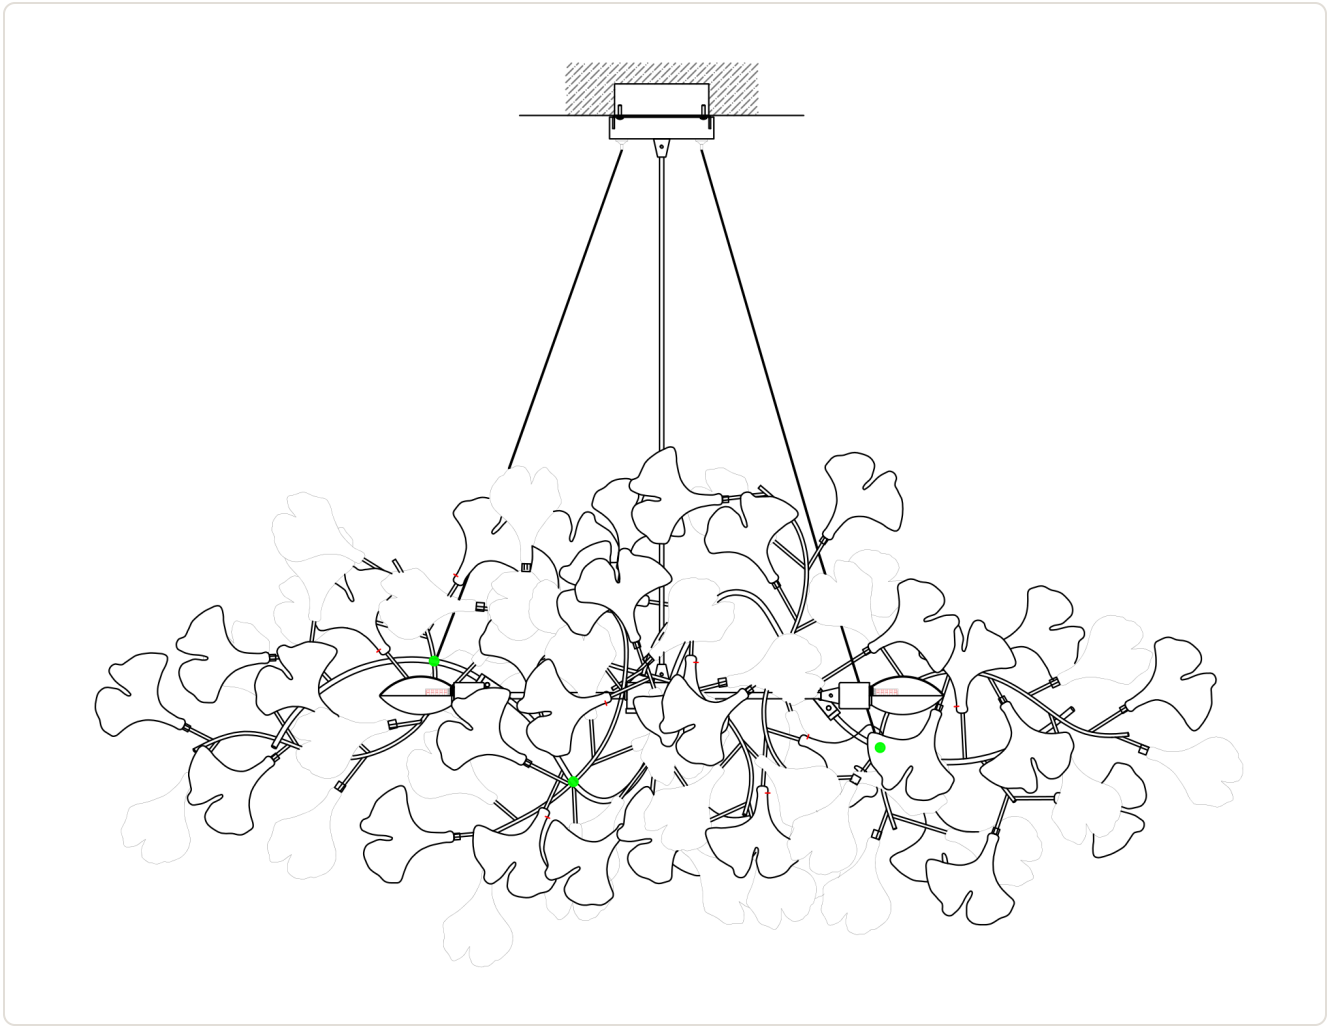

Model **YIOSI-0454** · **YIOSI-0455**

Please read this guide completely before you begin, and keep it for future reference.

BEFORE YOU BEGIN

⚠ **WARNING**

- **Turn off the power at the circuit breaker** before installing, changing bulbs or cleaning the fixture.
- Installation by a **qualified electrician** is recommended. Install in accordance with local electrical codes.
- This fixture takes 6 G9 bulbs. Use bulbs of a suitable rating and do not exceed it.
- Do not clean the fixture with corrosive substances such as gasoline or alcohol-based disinfectants.
- Use this fixture only for its intended purpose. Do not modify or rewire it.
- Keep small parts and packaging away from children. They can cause serious injury.


PREPARATION

- Read every step carefully and follow them in order.
- Unpack and check all parts against the parts list. If anything is missing or damaged, contact us before installing (see the last page). We will send replacement parts promptly.
- Assemble the fixture where it will be installed. Moving it mid-assembly risks losing small parts.

SPECIFICATIONS

LIGHT SOURCE	MOUNTING
6 × G9 bulbs	**Ceiling, adjustable cables**

IN THE BOX

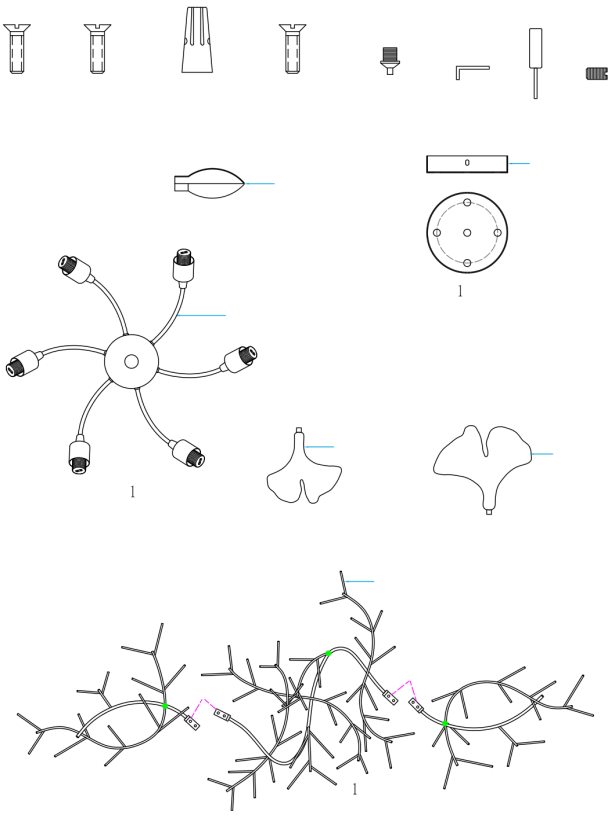


PART	QTY	DESCRIPTION
A	× 1	Canopy (round disc)
B	× 1	Lamp body with arms
C	× 1	Branch
D	× 38	Large leaf blade (incl. 2 spare)
E	× 38	Small leaf blade (incl. 2 spare)
F	× 7	Glass shade (incl. 1 spare)
—	× 1	Hardware kit (anchors, screws, wire connectors, hex key)

INSTALLATION

STEP 1

Assemble the lamp body


Find the canopy (A) and the lamp body (B). Thread the power cord through the centre and tighten the screws on the side. Fit the branches (C) to the lamp body as shown, threading the wires through in sequence, and secure them. Make sure the wire safety clip is fastened.

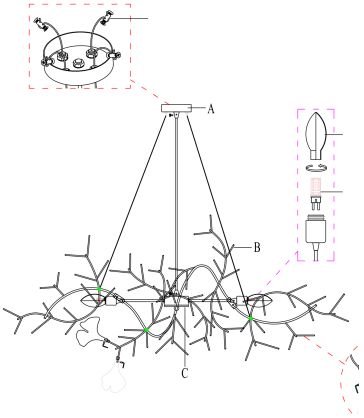

STEP 2

Mount the plate and connect the wires


Turn off the power at the circuit breaker. Take the mounting plate off the canopy and fix it to the ceiling with the anchors and screws. Join the fixture wires to the matching house supply wires with the wire connectors: live to live, neutral to neutral, ground to ground. Then tighten the canopy onto the plate.




STEP 3

Set the height

Hold the cable grip under the canopy and slide the cables to adjust the height of the fixture to suit the room.

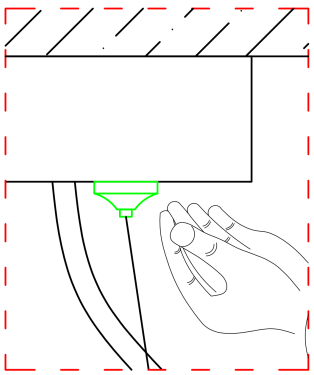


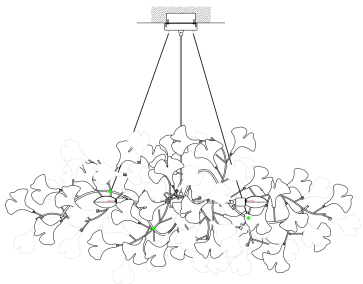

STEP 4

Fit the leaves, bulbs and shades

Clip the large and small leaf blades (D, E) onto the branches in a staggered pattern and adjust their angle as you like. Insert a G9 bulb into each lamp holder and tighten a glass shade (F) over it. Restore power and switch on to test.

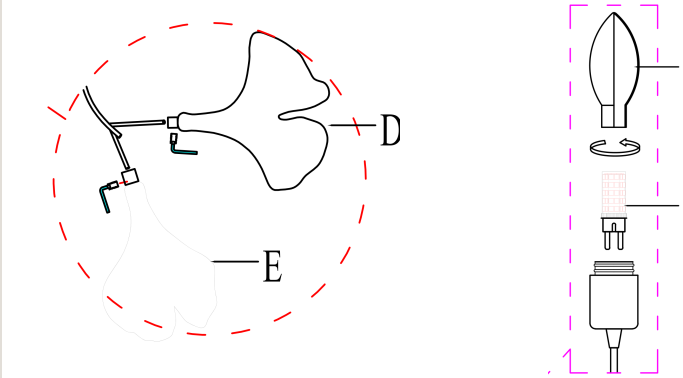

CARE & SUPPORT

CLEANING & CARE

- Clean the fixture about once a month to keep it looking its best.
- Turn off the power and let the fixture cool to room temperature first.
- Wipe with a soft cloth dampened with water and wrung dry. Never spray liquid directly onto the fixture.
- Do not use gasoline, alcohol or other corrosive cleaners.

GOOD TO KNOW

- Use the fixture only as designed. Damage caused by modification, third-party parts or natural disasters is not covered.
- Warranty terms are listed at yiosilamp.com.

NEED HELP?

support@yiosilamp.com

+1 970-896-9411

Missing parts, installation questions or anything else, we are here to help. Please include your order number and a photo of the issue so we can resolve it quickly.