
YIOSI

INSTALLATION GUIDE

3-Light Glass Bubble Flush Mount

FLUSH MOUNT · CEILING

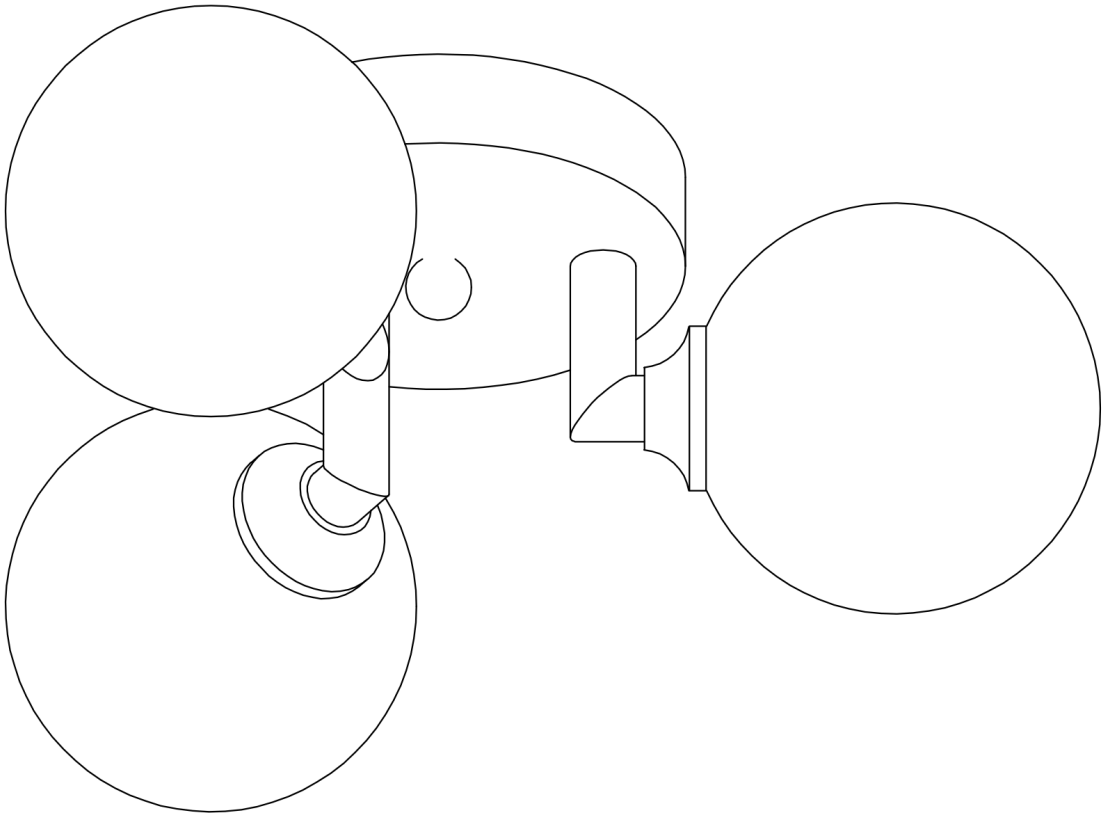

Model **YIOSI-0537**

Please read this guide completely before you begin, and keep it for future reference.

BEFORE YOU BEGIN

⚠ **WARNING**

- **Turn off the power at the circuit breaker** before installing, changing bulbs or cleaning the fixture.
- Installation by a **qualified electrician** is recommended. Install in accordance with local electrical codes.
- This fixture uses 3 G9 bulbs, 3 W each. Replace only with bulbs of the same type and rating.
- Do not clean the fixture with corrosive substances such as gasoline or alcohol-based disinfectants.
- Use this fixture only for its intended purpose. Do not modify or rewire it.
- Keep small parts and packaging away from children. They can cause serious injury.


PREPARATION

- Read every step carefully and follow them in order.
- Unpack and check all parts against the parts list. If anything is missing or damaged, contact us before installing (see the last page). We will send replacement parts promptly.
- Assemble the fixture where it will be installed. Moving it mid-assembly risks losing small parts.

SPECIFICATIONS


LIGHT SOURCE	WATTAGE	COLOR TEMPERATURE
3 × G9 bulbs	**3 W per bulb**	**2700K**

IN THE BOX

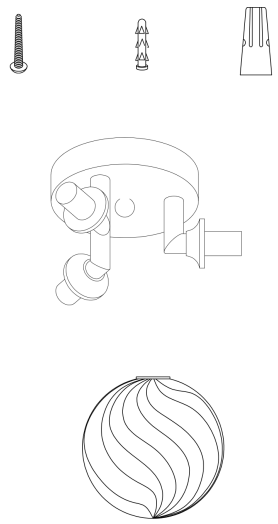

PART	QTY	DESCRIPTION
a	× 1	Fixture body
b	× 3	Glass globe
—	× 2	Screw
—	× 2	Wall anchor
—	× 3	Wire connector

PACKAGING

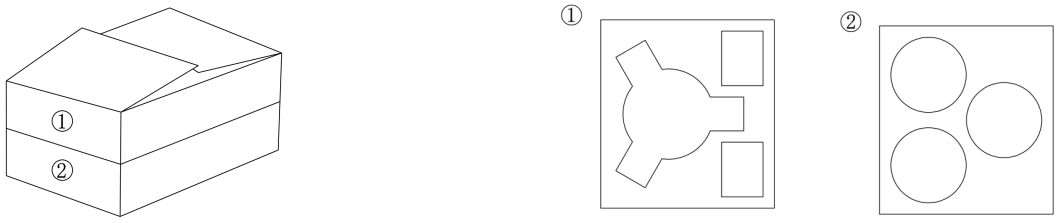


The fixture ships in two layers: (1) fixture body and accessories; (2) glass globes.

INSTALLATION

STEP 1

Remove the mounting plate


Unpack the fixture body and hardware and have a drill ready. Unscrew the fixing parts on the canopy and take out the mounting plate.

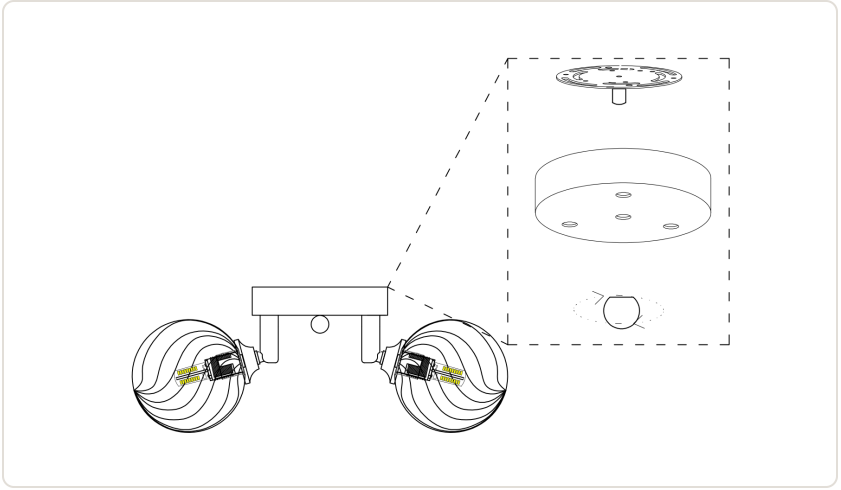

STEP 2

Mount the plate

Turn off the power at the circuit breaker. Drill the holes, insert the wall anchors and fix the mounting plate to the ceiling with the screws.

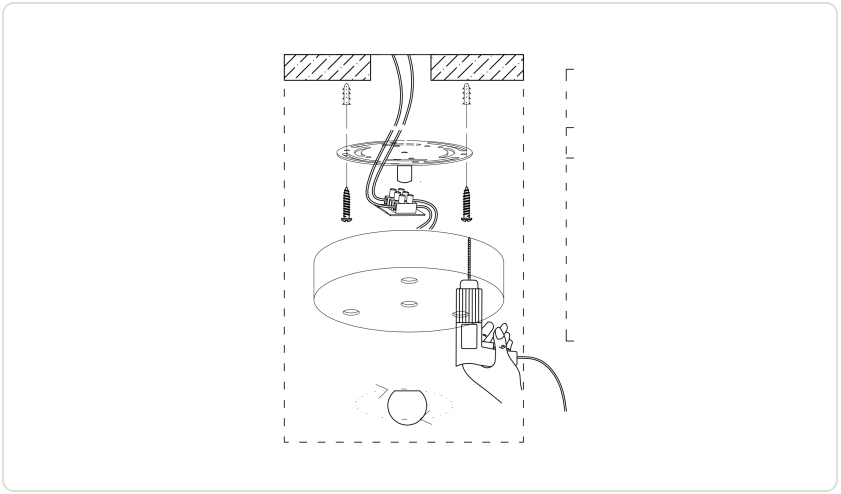

STEP 3


Connect the wires

Join the fixture wires to the matching house supply wires with the wire connectors: live to live, neutral to neutral, ground to ground. Then lift the canopy onto the mounting plate and lock it in place.

STEP 4

Fit the bulbs and globes

Insert the three G9 bulbs into the lamp holders, then fit the glass globes (b) onto the fixture. Restore power and switch on to test.

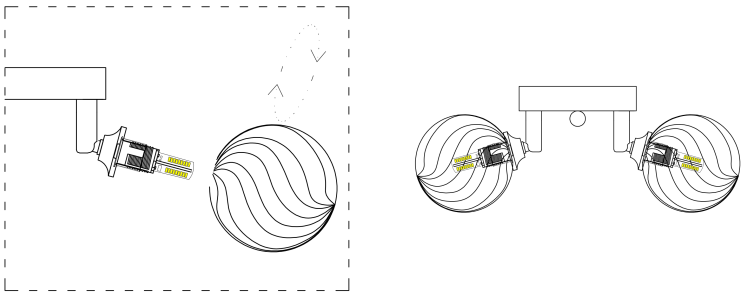

CARE & SUPPORT

CLEANING & CARE

- Clean the fixture about once a month to keep it looking its best.
- Turn off the power and let the fixture cool to room temperature first.
- Wipe with a soft cloth dampened with water and wrung dry. Never spray liquid directly onto the fixture.
- Do not use gasoline, alcohol or other corrosive cleaners.

GOOD TO KNOW

- Use the fixture only as designed. Damage caused by modification, third-party parts or natural disasters is not covered.
- Warranty terms are listed at yiosilamp.com.

NEED HELP?

support@yiosilamp.com

+1 970-896-9411

Missing parts, installation questions or anything else, we are here to help. Please include your order number and a photo of the issue so we can resolve it quickly.