
YIOSI

INSTALLATION GUIDE

20" Alabaster Cylinder Wall Sconce

WALL SCONCE · WALL MOUNT

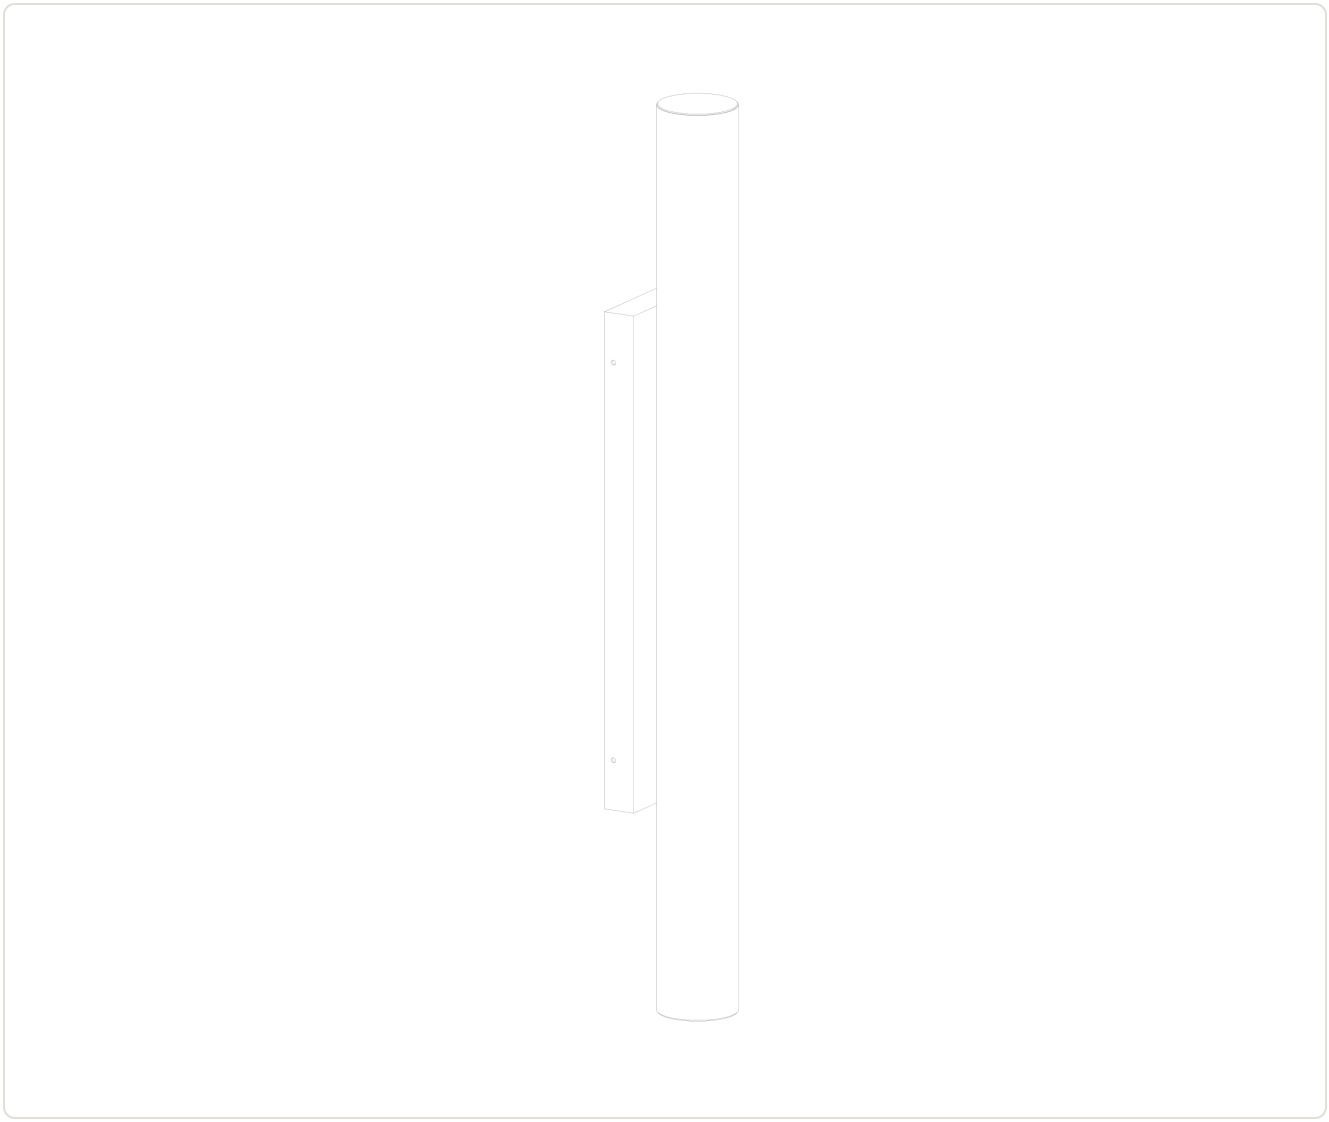

Model **YIOSI-0551** · **YIOSI-0552**

Please read this guide completely before you begin, and keep it for future reference.

BEFORE YOU BEGIN

⚠ **WARNING**

- **Turn off the power at the circuit breaker** before installing, changing bulbs or cleaning the fixture.
- Installation by a **qualified electrician** is recommended. Install in accordance with local electrical codes.
- Integrated LED, 12 W. No bulbs to replace.
- Do not clean the fixture with corrosive substances such as gasoline or alcohol-based disinfectants.
- Use this fixture only for its intended purpose. Do not modify or rewire it.
- Keep small parts and packaging away from children. They can cause serious injury.


PREPARATION

- Read every step carefully and follow them in order.
- Unpack and check all parts against the parts list. If anything is missing or damaged, contact us before installing (see the last page). We will send replacement parts promptly.
- Assemble the fixture where it will be installed. Moving it mid-assembly risks losing small parts.
- This guide shows one size. Other sizes in the same series install the same way.

SPECIFICATIONS

LIGHT SOURCE	WATTAGE	MOUNTING
Integrated LED	**12 W**	**Wall, over a junction box**

IN THE BOX

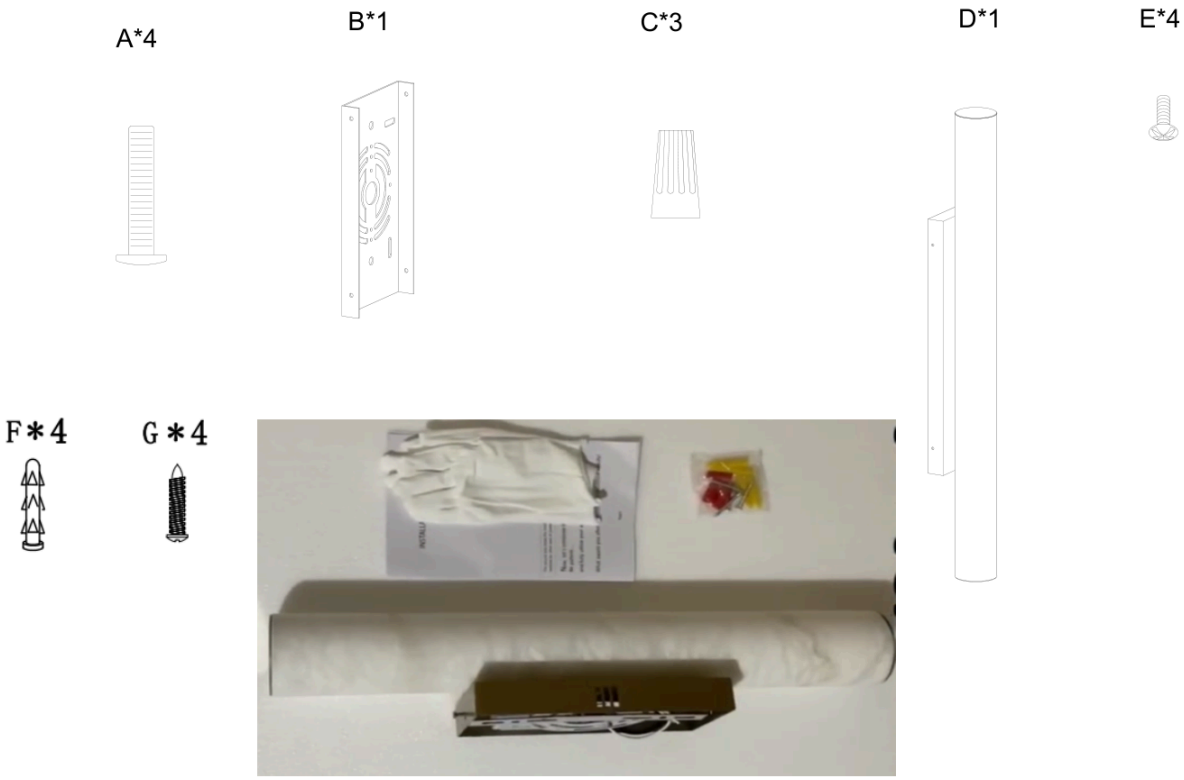

PART	QTY	DESCRIPTION
A	× 4	Mounting screw
B	× 1	Mounting bracket
C	× 3	Wire connector
D	× 1	Fixture body with alabaster shade
E	× 4	Screw
F	× 4	Wall anchor
G	× 4	Self-tapping screw

INSTALLATION

STEP 1

Mount the bracket

Turn off the power at the circuit breaker. Fix the mounting bracket (B) to the wall junction box with the mounting screws (A). Where you fix it to the wall itself, drill holes, insert the wall anchors (F) and use the self-tapping screws (G). Keep the bracket level.



STEP 2

Connect the wires


Join the fixture wires to the matching house supply wires with the wire connectors (C): live to live, neutral to neutral, ground to ground. Tuck the connections into the junction box.



STEP 3

Attach the fixture body


Place the fixture body (D) over the bracket and fasten it with the screws (E).

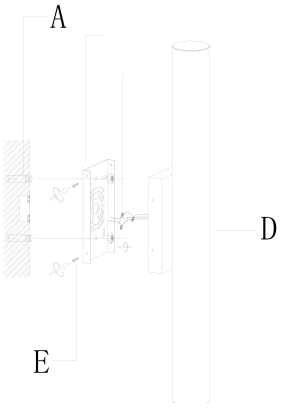

STEP 4

Finished

Restore power and switch on to test.

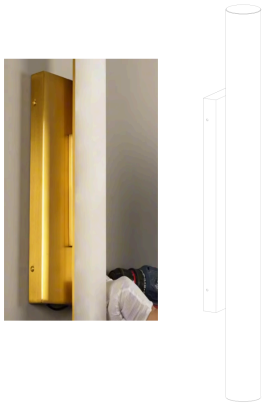

CARE & SUPPORT

CLEANING & CARE

- Clean the fixture about once a month to keep it looking its best.
- Turn off the power and let the fixture cool to room temperature first.
- Wipe with a soft cloth dampened with water and wrung dry. Never spray liquid directly onto the fixture.
- Do not use gasoline, alcohol or other corrosive cleaners.

GOOD TO KNOW

- Use the fixture only as designed. Damage caused by modification, third-party parts or natural disasters is not covered.
- Warranty terms are listed at yiosilamp.com.
- Natural alabaster varies piece to piece. Veining and tone differences are part of its character.

NEED HELP?

support@yiosilamp.com

+1 970-896-9411

Missing parts, installation questions or anything else, we are here to help. Please include your order number and a photo of the issue so we can resolve it quickly.