
YIOSI

INSTALLATION GUIDE

Ceramic Ginkgo Leaf Chandelier D600

CHANDELIER · CEILING MOUNT

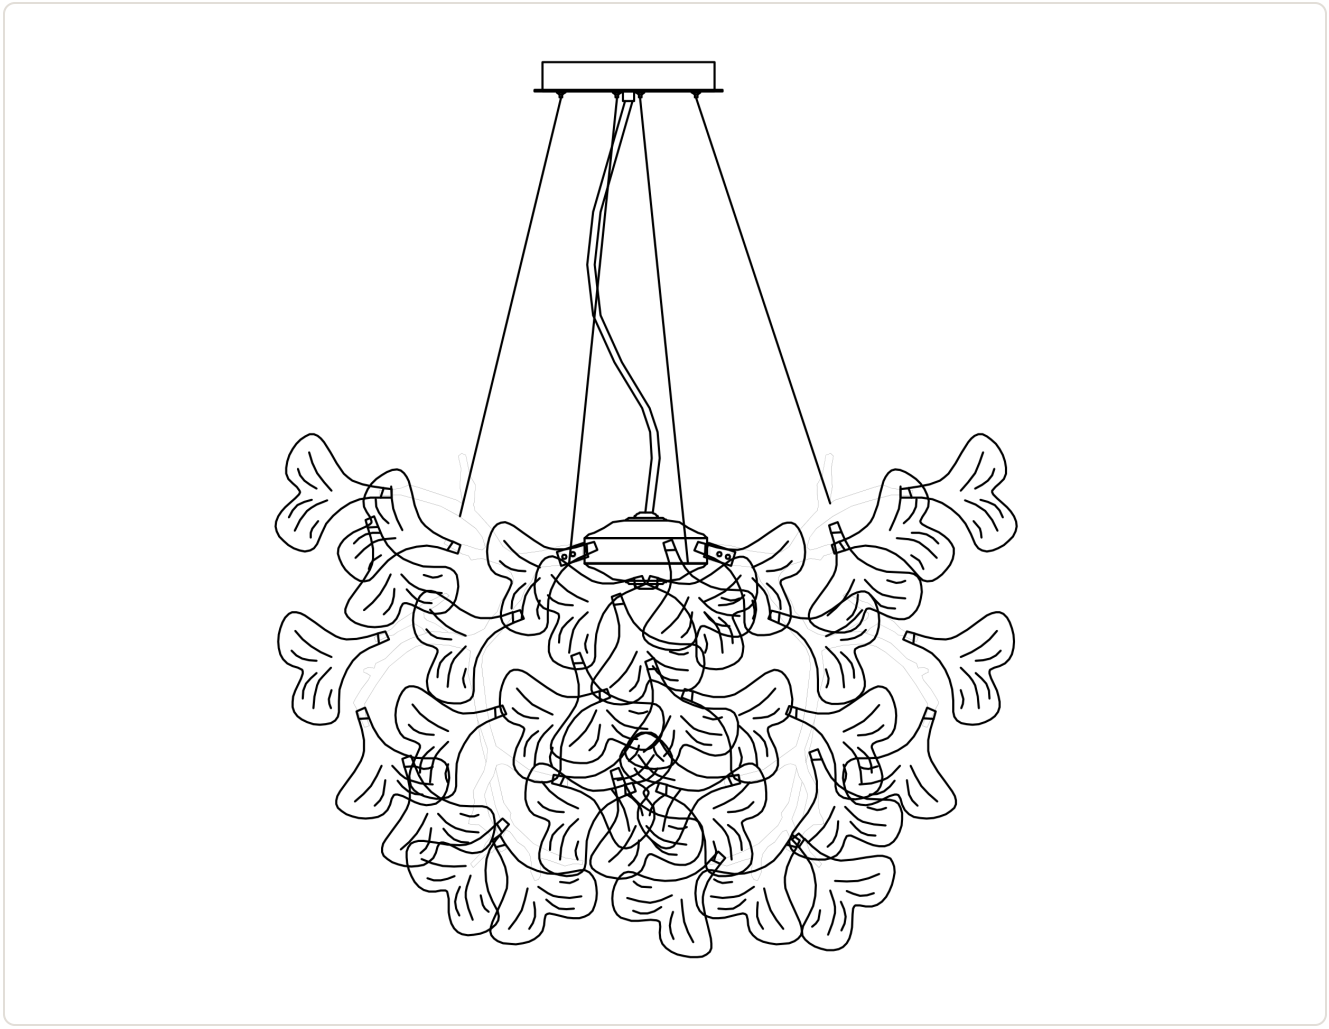

Model **YIOSI-0587**

Please read this guide completely before you begin, and keep it for future reference.

BEFORE YOU BEGIN

⚠ **WARNING**

- **Turn off the power at the circuit breaker** before installing, changing bulbs or cleaning the fixture.
- Installation by a **qualified electrician** is recommended. Install in accordance with local electrical codes.
- This fixture requires 6 G9 bulbs (not included), max. 40 W each. Do not exceed the rated wattage.
- Do not clean the fixture with corrosive substances such as gasoline or alcohol-based disinfectants.
- Use this fixture only for its intended purpose. Do not modify or rewire it.
- Keep small parts and packaging away from children. They can cause serious injury.
- For indoor use only.


PREPARATION

- Read every step carefully and follow them in order.
- Unpack and check all parts against the parts list. If anything is missing or damaged, contact us before installing (see the last page). We will send replacement parts promptly.
- Assemble the fixture where it will be installed. Moving it mid-assembly risks losing small parts.

SPECIFICATIONS

LIGHT SOURCE	MAX. WATTAGE	MOUNTING
6 × G9 bulbs (not included)	**40 W per bulb**	**Ceiling (flat or sloped), adjustable cables**

IN THE BOX

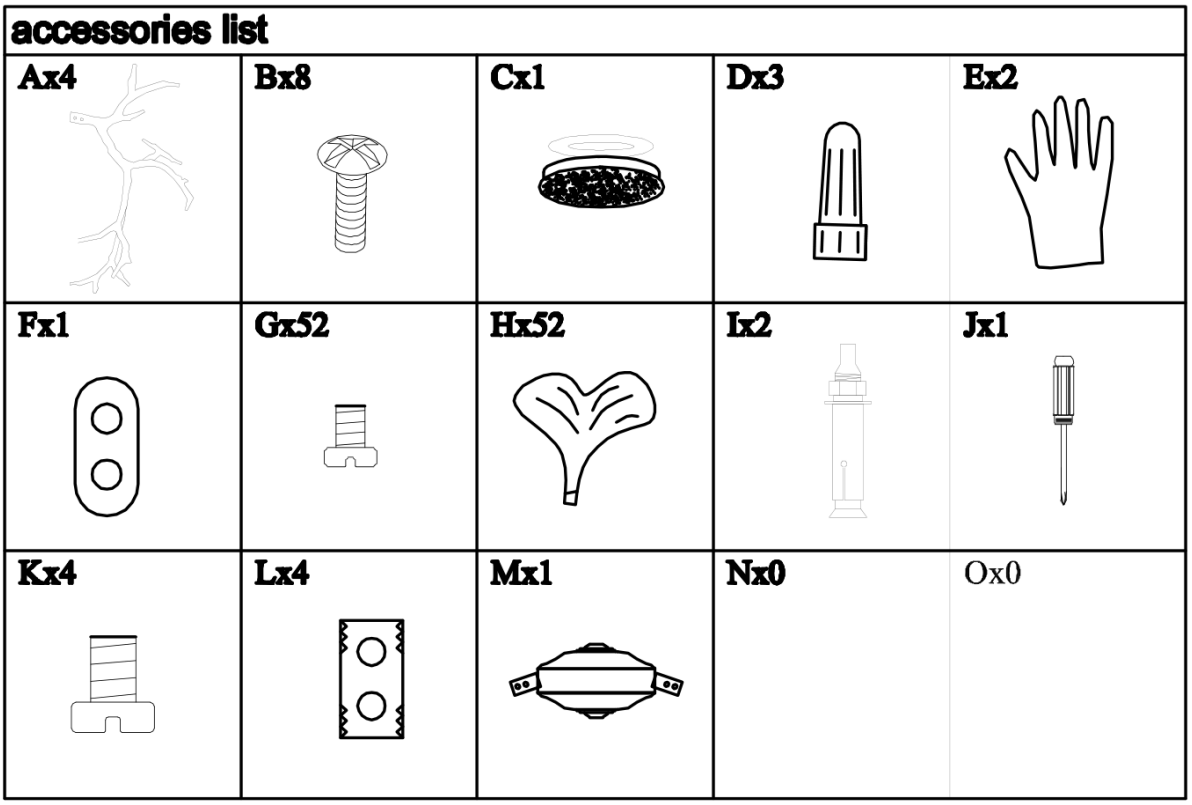


PART	QTY	DESCRIPTION
A	× 4	Branch arm
B / K	× 8 / 4	Screw
C	× 1	Round cover
D	× 3	Wire connector
E / J	× 2 / 1	Gloves / screwdriver
F / L	× 1 / 4	Connecting plate
G	× 52	Leaf screw
H	× 52	Ceramic ginkgo leaf
I	× 2	Expansion bolt
M	× 1	Lamp body hub

INSTALLATION

STEP 1

Check the lamp body


Take the lamp body out of the box and check that all joints and branches are firmly attached.

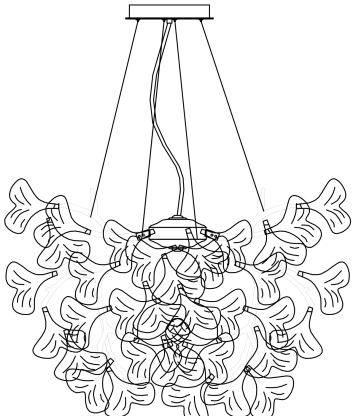

STEP 2

Mount the crossbar


Turn off the power at the circuit breaker. Remove the crossbar from the mounting base and fix it to the ceiling junction box with the screws.

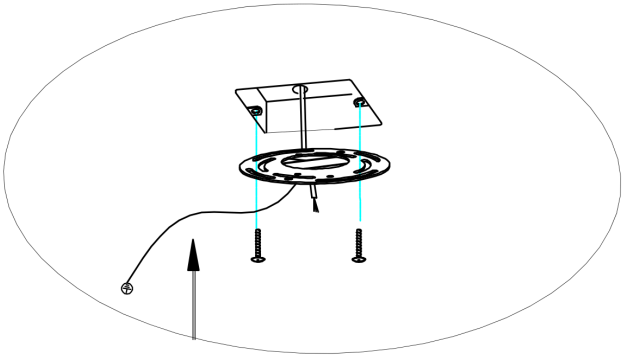

STEP 3

Connect and fix the canopy


Lift the lamp body up to the bracket. Join the fixture wires to the matching house supply wires with the wire connectors (D): live to live, neutral to neutral, ground to ground. Align the canopy with the screw holes and tighten the screws. To set the height, press and hold the button on each cable grip and slide the cable.

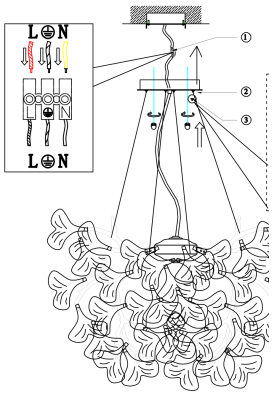

STEP 4

Shape the branches


Swing the arms and lamp holders into position, then hold each branch with your hands and spread it out evenly until you like the shape.

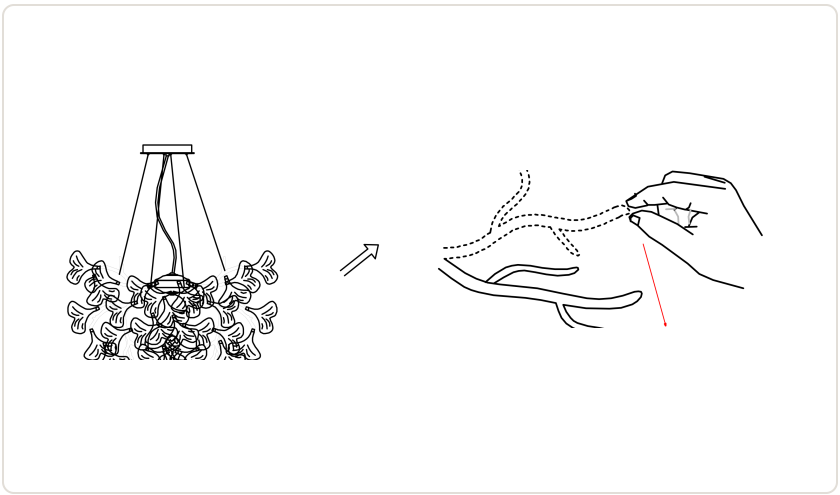

STEP 5

Fit the leaves and bulbs

Hook each ceramic ginkgo leaf (H) into its hole on the branches as shown. Install the 6 G9 bulbs, then restore power and switch on to test.

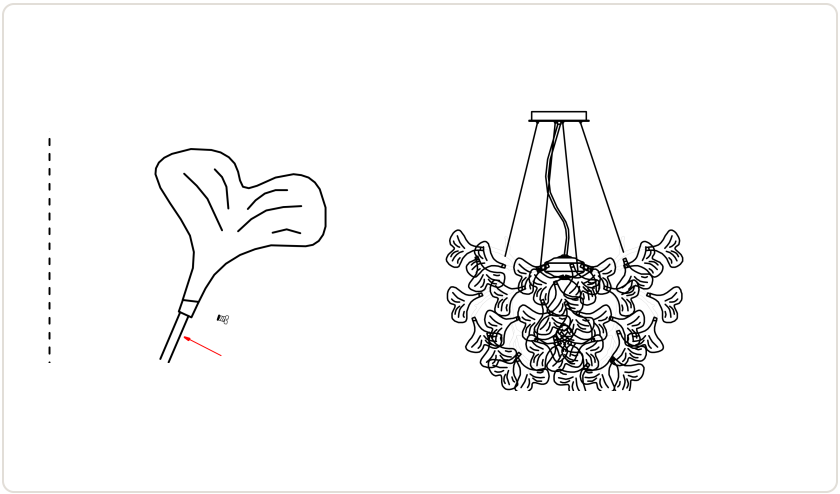

CARE & SUPPORT

CLEANING & CARE

- Clean the fixture about once a month to keep it looking its best.
- Turn off the power and let the fixture cool to room temperature first.
- Wipe with a soft cloth dampened with water and wrung dry. Never spray liquid directly onto the fixture.
- Do not use gasoline, alcohol or other corrosive cleaners.

GOOD TO KNOW

- Use the fixture only as designed. Damage caused by modification, third-party parts or natural disasters is not covered.
- Warranty terms are listed at yiosilamp.com.
- The ceramic leaves are handmade, so slight variations in size may occur.
- The fixture can be installed on a flat or a sloped ceiling.

NEED HELP?

support@yiosilamp.com

+1 970-896-9411

Missing parts, installation questions or anything else, we are here to help. Please include your order number and a photo of the issue so we can resolve it quickly.