
YIOSI

INSTALLATION GUIDE

10-Light Marble Globe Pendant

PENDANT · CEILING MOUNT

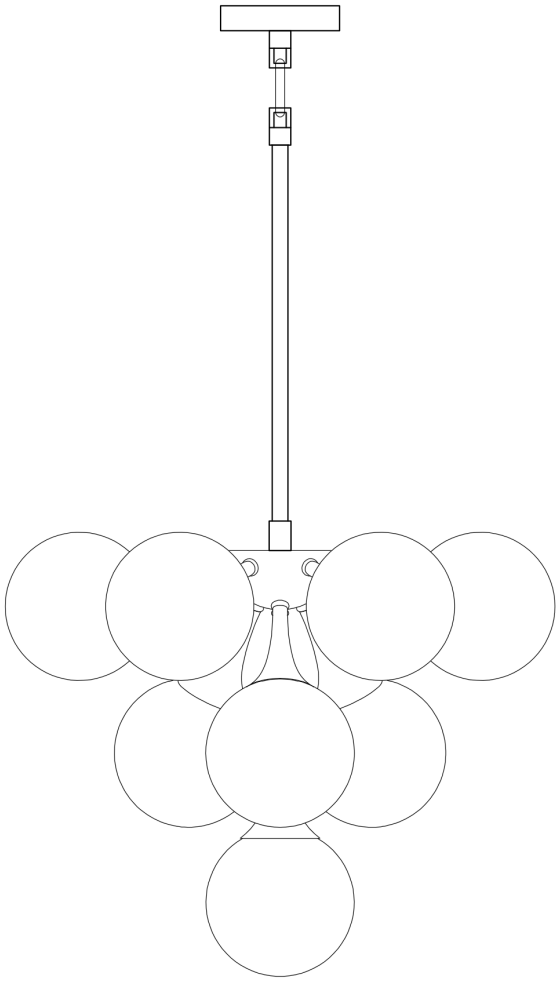

Model **YIOSI-0591**

Please read this guide completely before you begin, and keep it for future reference.

BEFORE YOU BEGIN

⚠ **WARNING**

- **Turn off the power at the circuit breaker** before installing, changing bulbs or cleaning the fixture.
- Installation by a **qualified electrician** is recommended. Install in accordance with local electrical codes.
- This fixture uses 10 G9 bulbs (included), 3 W each, 2700K. Replace only with bulbs of the same type and rating.
- Do not clean the fixture with corrosive substances such as gasoline or alcohol-based disinfectants.
- Use this fixture only for its intended purpose. Do not modify or rewire it.
- Keep small parts and packaging away from children. They can cause serious injury.


PREPARATION

- Read every step carefully and follow them in order.
- Unpack and check all parts against the parts list. If anything is missing or damaged, contact us before installing (see the last page). We will send replacement parts promptly.
- Assemble the fixture where it will be installed. Moving it mid-assembly risks losing small parts.

SPECIFICATIONS

LIGHT SOURCE	WATTAGE	MOUNTING
10 × G9 bulbs (included)	**3 W per bulb, 2700K**	**Ceiling, adjustable rods**

IN THE BOX

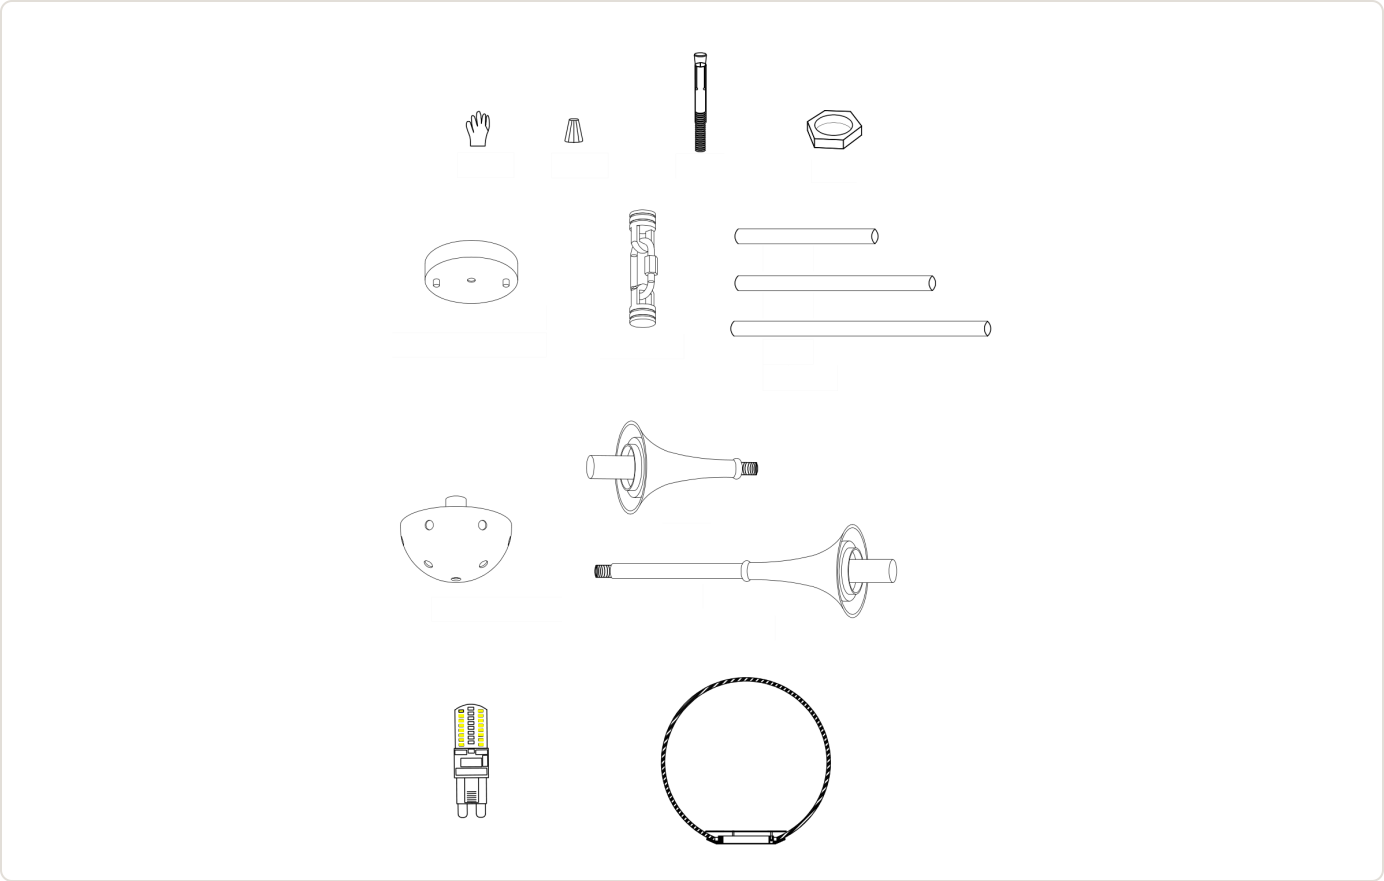


PART	QTY	DESCRIPTION
a	× 1	Canopy with hanging plate
b	× 1	Ring
c	× 6	Rod, three lengths (c1, c2, c3), 2 each
d	× 1	Lamp body
e	× 10	Lamp arm (9 × e1, 1 × e2 long)
f	× 10	G9 bulb
g	× 10	Marble shade
—	× 6	Wire connector
—	× 4 + 4	Screw and nut
—	× 2	Gloves

INSTALLATION

STEP 1

Fit the lamp arms


Remove the connector and the metal cover from the lamp body (d). Screw the lamp arms (e1, e2) into the lamp body and tighten the nuts. Join all arm wires to the main wire, then refit the cover and the connector.

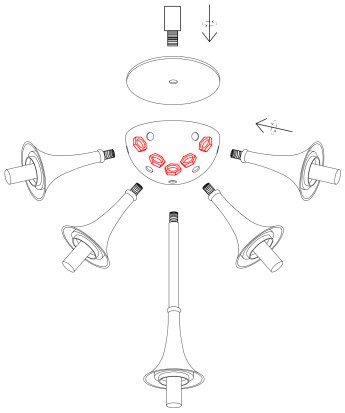

STEP 2

Remove the hanging plate


Remove the hanging plate from the canopy (a).

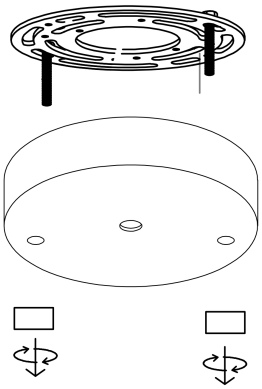

STEP 3

Join the rods


Connect the lamp body, the rods (c), the ring (b) and the canopy in sequence. Use as many rods as you need for the height you want.

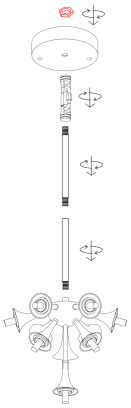

STEP 4

Mount the hanging plate


Turn off the power at the circuit breaker. Fix the hanging plate to the ceiling with the screws and nuts.

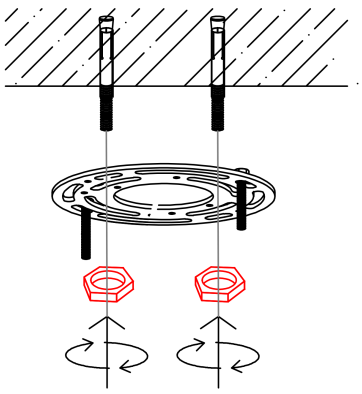

STEP 5

Connect and fix the canopy


Join the fixture wires to the matching house supply wires with the wire connectors: live to live, neutral to neutral, ground to ground. Fix the canopy onto the hanging plate.

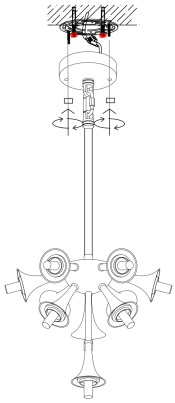

STEP 6

Fit the bulbs and shades

Install the G9 bulbs (f) in the lamp holders, then twist the marble shades (g) into place. Restore power and switch on to test.

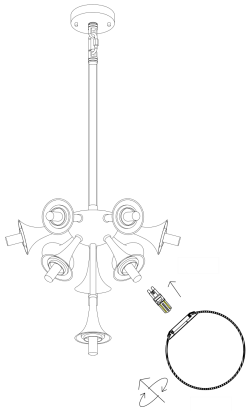

CARE & SUPPORT

CLEANING & CARE

- Clean the fixture about once a month to keep it looking its best.
- Turn off the power and let the fixture cool to room temperature first.
- Wipe with a soft cloth dampened with water and wrung dry. Never spray liquid directly onto the fixture.
- Do not use gasoline, alcohol or other corrosive cleaners.

GOOD TO KNOW

- Use the fixture only as designed. Damage caused by modification, third-party parts or natural disasters is not covered.
- Warranty terms are listed at yiosilamp.com.
- Natural marble varies piece to piece. Veining and tone differences are part of its character.

NEED HELP?

support@yiosilamp.com

+1 970-896-9411

Missing parts, installation questions or anything else, we are here to help. Please include your order number and a photo of the issue so we can resolve it quickly.