
YIOSI

INSTALLATION GUIDE

Two-Tier Square Diamond Crystal Round Pendant 780

CHANDELIER · CEILING MOUNT

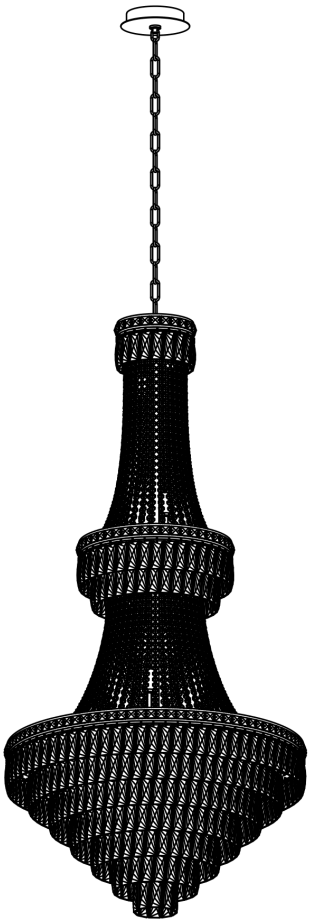

Model **YIOSI-0607** · **YIOSI-0608**

Please read this guide completely before you begin, and keep it for future reference.

BEFORE YOU BEGIN

⚠ **WARNING**

- **Turn off the power at the circuit breaker** before installing, changing bulbs or cleaning the fixture.
- Installation by a **qualified electrician** is recommended. Install in accordance with local electrical codes.
- This fixture requires 29 E12 bulbs, max. 40 W each. Do not exceed the rated wattage.
- Do not clean the fixture with corrosive substances such as gasoline or alcohol-based disinfectants.
- Use this fixture only for its intended purpose. Do not modify or rewire it.
- Keep small parts and packaging away from children. They can cause serious injury.


PREPARATION

- Read every step carefully and follow them in order.
- Unpack and check all parts against the parts list. If anything is missing or damaged, contact us before installing (see the last page). We will send replacement parts promptly.
- Assemble the fixture where it will be installed. Moving it mid-assembly risks losing small parts.
- This guide shows one size. Other sizes in the same series install the same way.

SPECIFICATIONS

LIGHT SOURCE	MAX. WATTAGE	MOUNTING
29 × E12 bulbs	**40 W per bulb**	**Ceiling, adjustable chain**

IN THE BOX

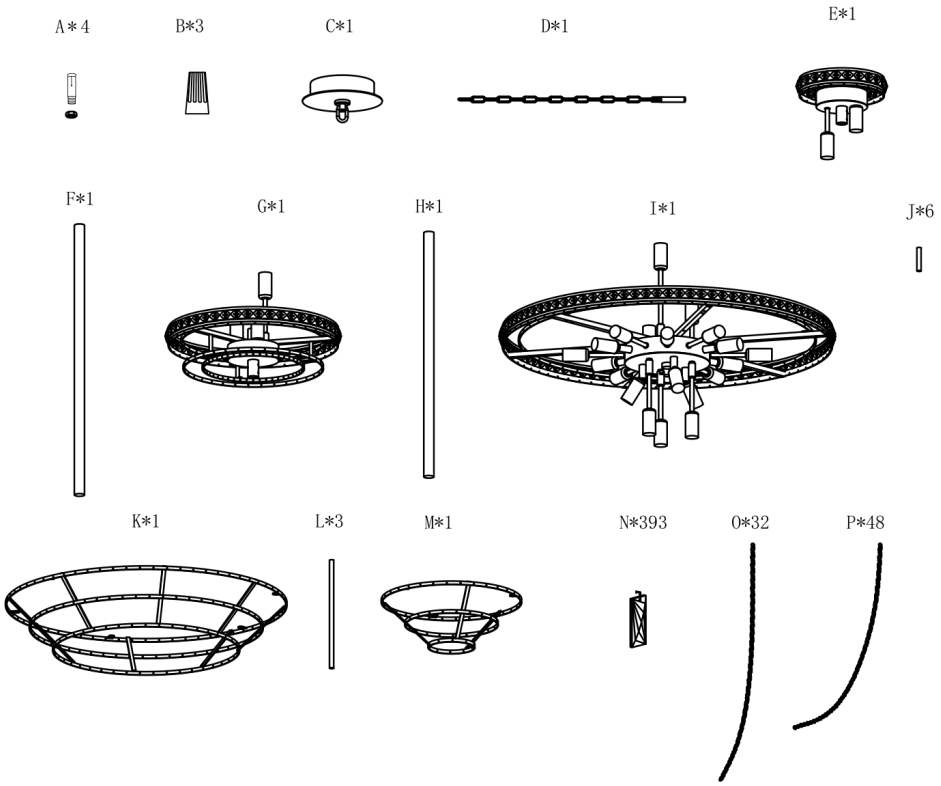


PART	QTY	DESCRIPTION
A	× 4	Screw
B	× 3	Wire connector
C / D	× 1 / 1	Canopy / chain
E / I	× 1 / 1	Top lamp body / main lamp body
G / K / M	× 1	Middle lamp ring / ring / bottom ring (one each)
F / H	× 1 / 1	Upper rod / lower rod
J / L	× 6 / 3	Short rod / rod
N	× 393	Crystal pendant
O / P	× 80	Crystal strand (32 + 48)

INSTALLATION

STEP 1

Assemble the frame


Join the top lamp body (E), the upper rod (F), the middle lamp ring (G), the lower rod (H) and the main lamp body (I). Fit the ring (K) and the bottom ring (M) below the main lamp body with the rods (J, L), as shown.

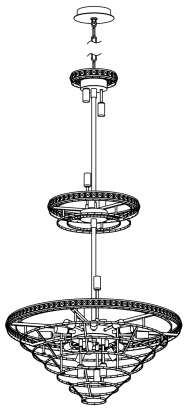

STEP 2

Mount the bracket


Turn off the power at the circuit breaker. Remove the mounting bracket from the canopy (C) and fix it to the ceiling junction box with the screws (A).

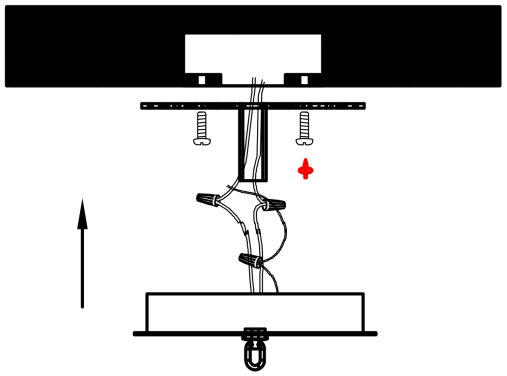

STEP 3

Connect and hang


Join the fixture wires to the matching house supply wires with the wire connectors (B): live to live, neutral to neutral, ground to ground. Fasten the canopy to the bracket, hang the frame from the chain (D) and adjust it to the height you want.

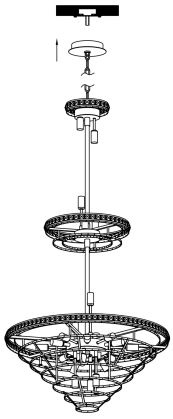

STEP 4

Fit the bulbs and crystals

Install the 29 E12 bulbs. Hang the crystal strands (O, P) and the crystal pendants (N) on the rings, tier by tier, as shown. Restore power and switch on to test.

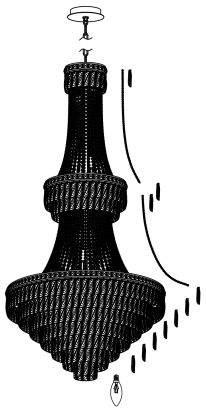

CARE & SUPPORT

CLEANING & CARE

- Clean the fixture about once a month to keep it looking its best.
- Turn off the power and let the fixture cool to room temperature first.
- Wipe with a soft cloth dampened with water and wrung dry. Never spray liquid directly onto the fixture.
- Do not use gasoline, alcohol or other corrosive cleaners.

GOOD TO KNOW

- Use the fixture only as designed. Damage caused by modification, third-party parts or natural disasters is not covered.
- Warranty terms are listed at yiosilamp.com.

NEED HELP?

support@yiosilamp.com

+1 970-896-9411

Missing parts, installation questions or anything else, we are here to help. Please include your order number and a photo of the issue so we can resolve it quickly.