
YIOSI

INSTALLATION GUIDE

Pineapple Bead Flush Mount 450

FLUSH MOUNT · CEILING

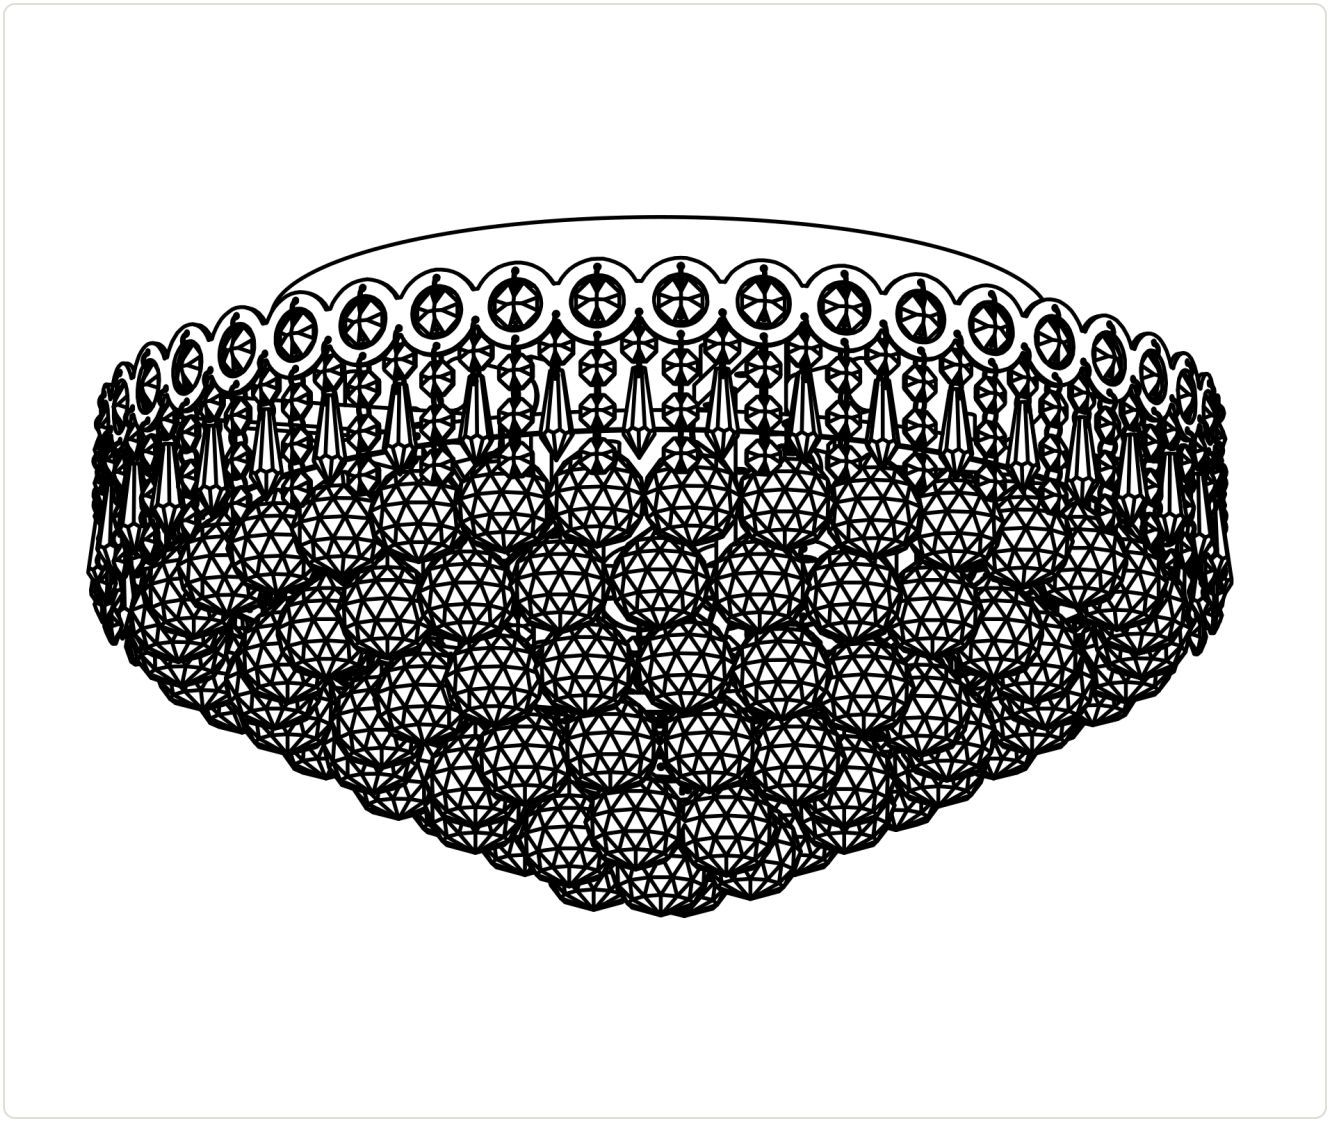

Model **YIOSI-0612**

Please read this guide completely before you begin, and keep it for future reference.

BEFORE YOU BEGIN

⚠ **WARNING**

- **Turn off the power at the circuit breaker** before installing, changing bulbs or cleaning the fixture.
- Installation by a **qualified electrician** is recommended. Install in accordance with local electrical codes.
- This fixture requires 4 G9 bulbs, max. 20 W each. Do not exceed the rated wattage.
- Do not clean the fixture with corrosive substances such as gasoline or alcohol-based disinfectants.
- Use this fixture only for its intended purpose. Do not modify or rewire it.
- Keep small parts and packaging away from children. They can cause serious injury.


PREPARATION

- Read every step carefully and follow them in order.
- Unpack and check all parts against the parts list. If anything is missing or damaged, contact us before installing (see the last page). We will send replacement parts promptly.
- Assemble the fixture where it will be installed. Moving it mid-assembly risks losing small parts.
- This guide shows one size. Other sizes in the same series install the same way.

SPECIFICATIONS

LIGHT SOURCE	MAX. WATTAGE	MOUNTING
4 × G9 bulbs	**20 W per bulb**	**Ceiling, flush**

IN THE BOX

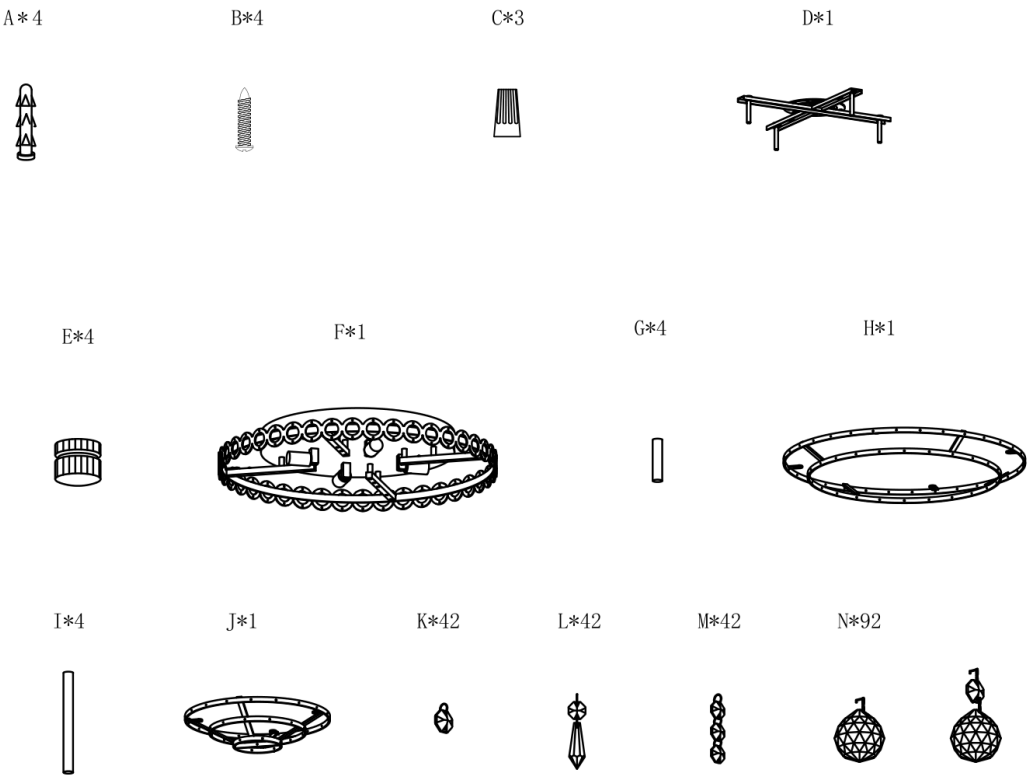


PART	QTY	DESCRIPTION
A, B	× 8	Wall anchor (A 4), screw (B 4)
C	× 3	Wire connector
D	× 1	Mounting bracket
E	× 4	Fitting
F	× 1	Upper frame
G, I	× 8	Rod (4 each)
H, J	× 2	Middle ring, bottom ring
K, L	× 84	Small crystal (K 42), crystal drop (L 42)
M	× 42	Crystal bead chain
N, O	× 93	Crystal ball (N 92), large crystal ball (O 1)

INSTALLATION

STEP 1

Mount the bracket


Turn off the power at the circuit breaker. Fix the cross bracket (D) to the ceiling with the wall anchors (A) and screws (B).

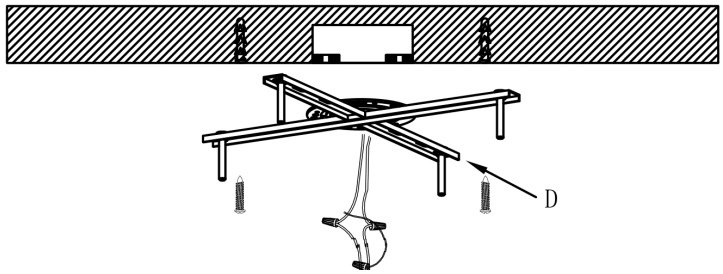

STEP 2

Connect the wires and attach the frame


Join the fixture wires to the matching house supply wires with the wire connectors (C): live to live, neutral to neutral, ground to ground. Tuck the connections neatly into the junction box. Lift the upper frame (F) to the bracket and fasten it.

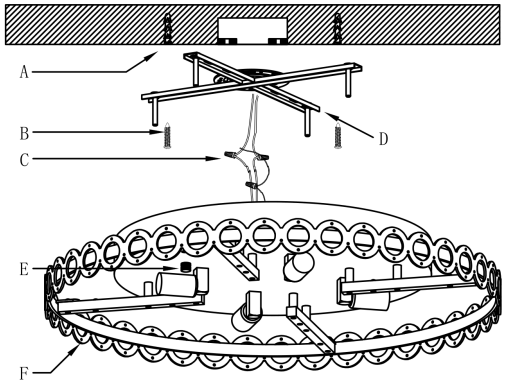

STEP 3

Assemble the lower tiers


Fix the rods (G) and the middle ring (H) under the frame, then the rods (I) and the bottom ring (J).

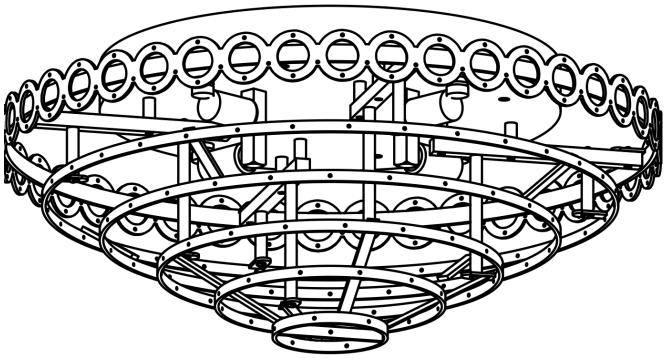

STEP 4

Fit the bulbs and crystals

Install the 4 G9 bulbs. Hang the crystals (K, L, M) and crystal balls (N) on the rings and the large ball (O) at the bottom, as shown. Restore power and switch on to test.

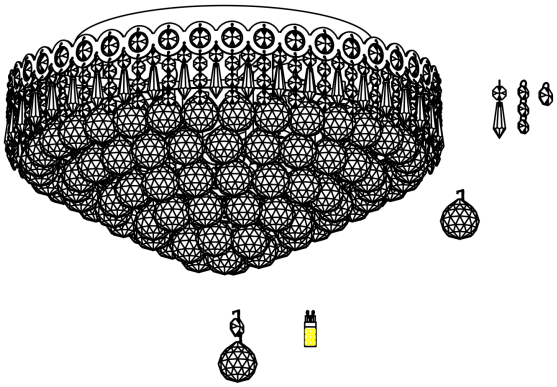

CARE & SUPPORT

CLEANING & CARE

- Clean the fixture about once a month to keep it looking its best.
- Turn off the power and let the fixture cool to room temperature first.
- Wipe with a soft cloth dampened with water and wrung dry. Never spray liquid directly onto the fixture.
- Do not use gasoline, alcohol or other corrosive cleaners.

GOOD TO KNOW

- Use the fixture only as designed. Damage caused by modification, third-party parts or natural disasters is not covered.
- Warranty terms are listed at yiosilamp.com.

NEED HELP?

support@yiosilamp.com

+1 970-896-9411

Missing parts, installation questions or anything else, we are here to help. Please include your order number and a photo of the issue so we can resolve it quickly.