
YIOSI

INSTALLATION GUIDE

Alabaster Cylinder Pendant 500

PENDANT · CEILING MOUNT

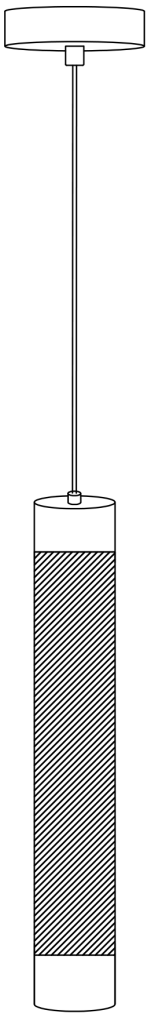

Model **YIOSI-0627** · **YIOSI-0628**

Please read this guide completely before you begin, and keep it for future reference.

BEFORE YOU BEGIN

⚠ **WARNING**

- **Turn off the power at the circuit breaker** before installing, changing bulbs or cleaning the fixture.
- Installation by a **qualified electrician** is recommended. Install in accordance with local electrical codes.
- LED light source, 3000K. Do not modify or replace it with a different light source.
- Do not clean the fixture with corrosive substances such as gasoline or alcohol-based disinfectants.
- Use this fixture only for its intended purpose. Do not modify or rewire it.
- Keep small parts and packaging away from children. They can cause serious injury.


PREPARATION

- Read every step carefully and follow them in order.
- Unpack and check all parts against the parts list. If anything is missing or damaged, contact us before installing (see the last page). We will send replacement parts promptly.
- Assemble the fixture where it will be installed. Moving it mid-assembly risks losing small parts.

SPECIFICATIONS

LIGHT SOURCE	COLOR TEMPERATURE	MOUNTING
LED	**3000K**	**Ceiling, adjustable cable**


IN THE BOX

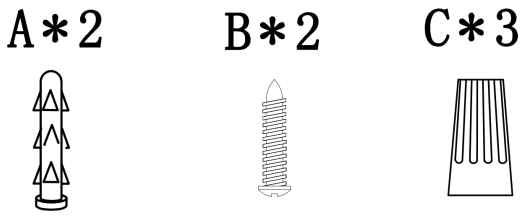




PART	QTY	DESCRIPTION
A	× 2	Wall anchor
B	× 2	Screw
C	× 3	Wire connector
—	× 1	Pendant body

PACKAGING



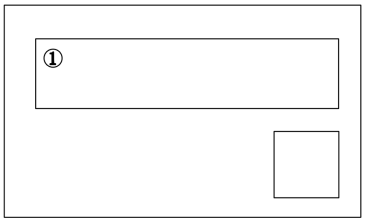


The fixture ships in one layer: pendant body and accessory pack.

INSTALLATION

STEP 1

Install the mounting plate


Turn off the power at the circuit breaker. Take the mounting plate out of the canopy and fix it to the ceiling with the wall anchors (A) and screws (B).

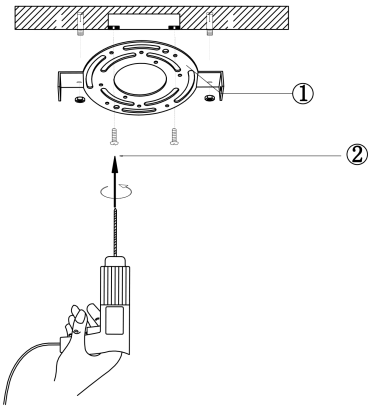

STEP 2

Connect the wires and fix the canopy


Take out the pendant. Join the fixture wires to the matching house supply wires with the wire connectors (C): live to live, neutral to neutral, ground to ground. Tuck the connections neatly into the junction box. Align the canopy holes with the mounting plate screw holes and tighten the screws.

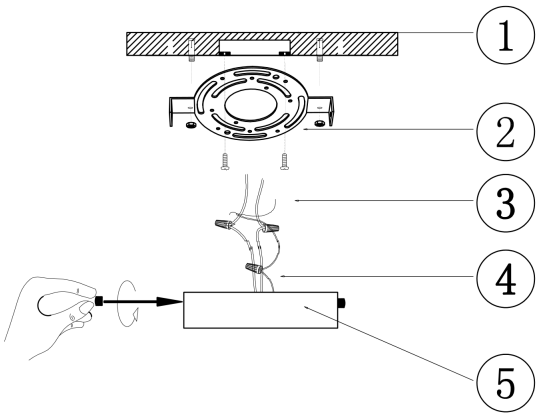

STEP 3

Set the height

Adjust the hanging cable to the length you want, then tighten the cable-lock screw. Restore power and switch on to test.

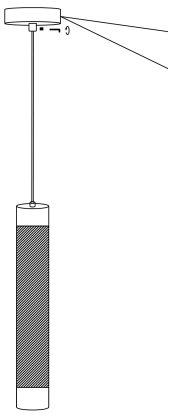

CARE & SUPPORT

CLEANING & CARE

- Clean the fixture about once a month to keep it looking its best.
- Turn off the power and let the fixture cool to room temperature first.
- Wipe with a soft cloth dampened with water and wrung dry. Never spray liquid directly onto the fixture.
- Do not use gasoline, alcohol or other corrosive cleaners.

GOOD TO KNOW

- Use the fixture only as designed. Damage caused by modification, third-party parts or natural disasters is not covered.
- Warranty terms are listed at yiosilamp.com.
- Natural alabaster varies piece to piece. Veining and tone differences are part of its character.

NEED HELP?

support@yiosilamp.com

+1 970-896-9411

Missing parts, installation questions or anything else, we are here to help. Please include your order number and a photo of the issue so we can resolve it quickly.