
YIOSI

INSTALLATION GUIDE

Seven-Tier Striped Column Staircase Chandelier D990

STAIRCASE CHANDELIER · CEILING MOUNT

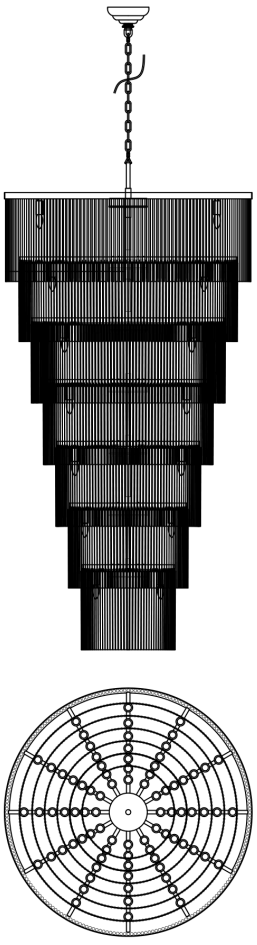

Model **YIOSI-0634** · **YIOSI-0635**

Please read this guide completely before you begin, and keep it for future reference.

BEFORE YOU BEGIN

⚠ **WARNING**

- **Turn off the power at the circuit breaker** before installing, changing bulbs or cleaning the fixture.
- Installation by a **qualified electrician** is recommended. Install in accordance with local electrical codes.
- This fixture requires 48 E12 bulbs (not included), max. 40 W each. Do not exceed the rated wattage.
- Do not clean the fixture with corrosive substances such as gasoline or alcohol-based disinfectants.
- Use this fixture only for its intended purpose. Do not modify or rewire it.
- Keep small parts and packaging away from children. They can cause serious injury.


PREPARATION

- Read every step carefully and follow them in order.
- Unpack and check all parts against the parts list. If anything is missing or damaged, contact us before installing (see the last page). We will send replacement parts promptly.
- Assemble the fixture where it will be installed. Moving it mid-assembly risks losing small parts.

SPECIFICATIONS

LIGHT SOURCE	MAX. WATTAGE	MOUNTING
48 × E12 bulbs (not included)	**40 W per bulb**	**Ceiling, chain and downrod**

IN THE BOX

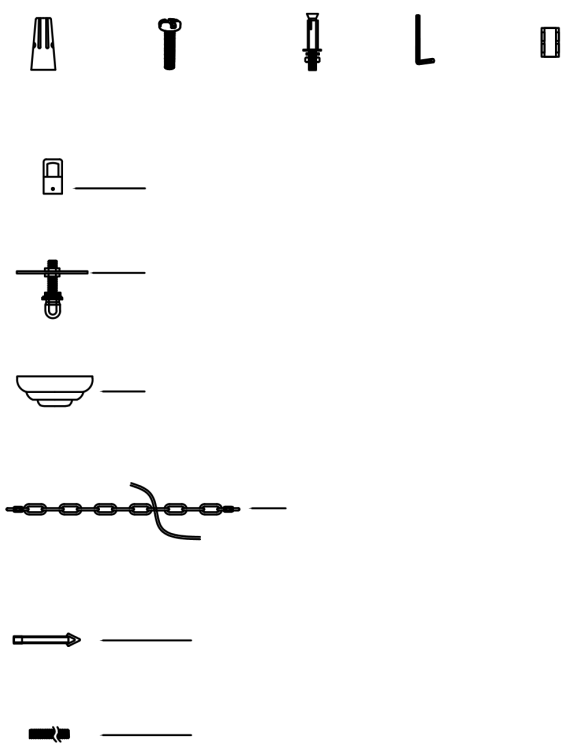


PART	QTY	DESCRIPTION
A–G	× 7	Tier ring, one per tier
A–G	× 48	Lamp-head tube (A 12, B 12, C 8, D 6, E 4, F 4, G 2)
A–G	× 7	Lamp base set: base, base cover and female connectors
—	× 18	Connecting rod (6, tiers A–F), straight rod (12, tier A)
H, J	× 1076	Glass strip: long (H 216), standard (J 860), spares included
K	× 885	Butterfly clamp (spares included)
Q, V	× 2	Lifting ring, threaded nipple
R, S	× 2	Ceiling plate, canopy
T, U	× 2	Long chain, downrod
—	× 1	Pack of small hardware (wire connectors, screws, anchors, key)

INSTALLATION

STEP 1

Mount and hang the top


Turn off the power at the circuit breaker. Fix the ceiling plate with the expansion screws. Join the fixture wires to the house supply wires with the wire connectors: live to live, neutral to neutral, ground to ground. Slide the canopy up over the threaded nipple, lock it with the lifting ring and hang the chain and downrod.

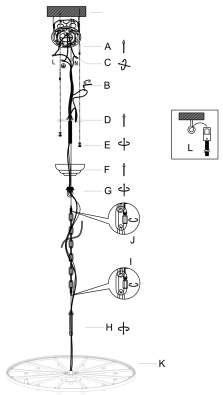

STEP 2

Build each tier


Each tier (A to G) is built the same way: fit its lamp-head tubes into the lamp base and fix them with screws and nuts; join the wires with terminal caps and cable ties inside the base; screw in the threaded tube, fit the base cover and tighten the female connector; then lock the tier ring onto the tube ends.

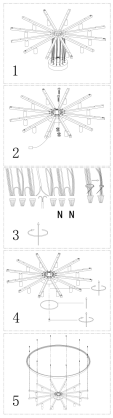

STEP 3

Hang tier A


Hang tier A under the downrod. Connect its wires to the terminal posts and tighten the safety screw.

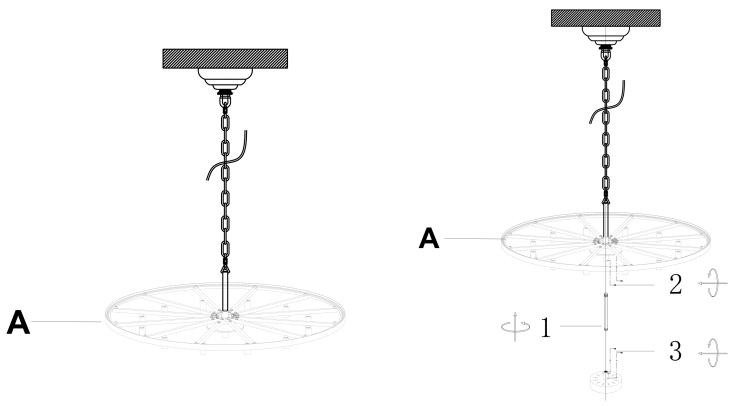


STEP 4

Add tiers B to G

Fit the connecting rod, then hang tier B under tier A and connect it the same way. Continue down through C, D, E, F and G.

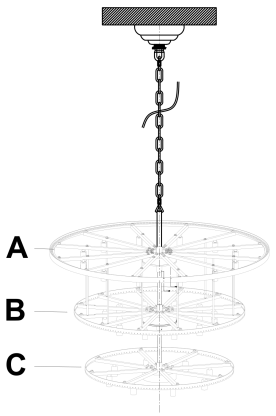


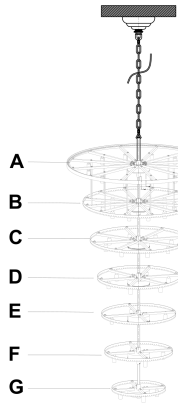

STEP 5

Fit the bulbs


Screw the 48 E12 bulbs (not included) into the lamp holders.

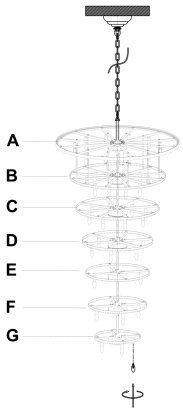

STEP 6

Fit the glass strips

Insert each glass strip into its positioning hole on the top of the tier ring, vertically and without force. Fix each pre-drilled strip with a butterfly clamp (K) and crimp the clamp wings to lock it. Restore power and switch on to test.

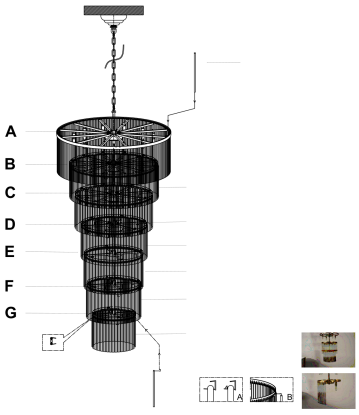

CARE & SUPPORT

CLEANING & CARE

- Clean the fixture about once a month to keep it looking its best.
- Turn off the power and let the fixture cool to room temperature first.
- Wipe with a soft cloth dampened with water and wrung dry. Never spray liquid directly onto the fixture.
- Do not use gasoline, alcohol or other corrosive cleaners.

GOOD TO KNOW

- Use the fixture only as designed. Damage caused by modification, third-party parts or natural disasters is not covered.
- Warranty terms are listed at yiosilamp.com.

NEED HELP?

support@yiosilamp.com

+1 970-896-9411

Missing parts, installation questions or anything else, we are here to help. Please include your order number and a photo of the issue so we can resolve it quickly.