
YIOSI

INSTALLATION GUIDE

Inverted Triangle Crystal Round Pendant 700

CHANDELIER · CEILING MOUNT

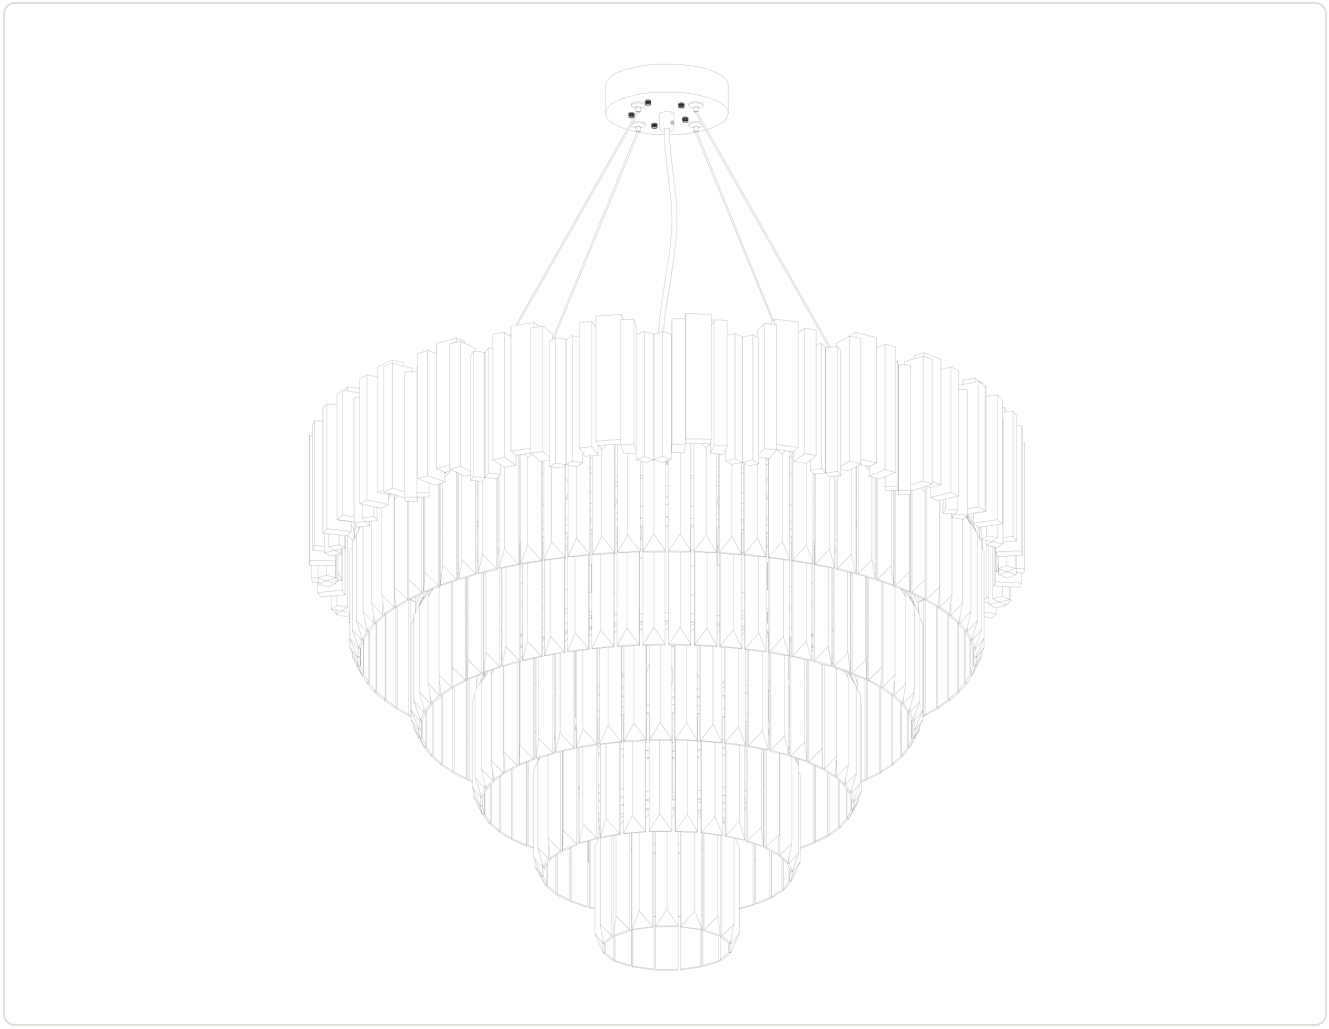

Model **YIOSI-0638**

Please read this guide completely before you begin, and keep it for future reference.

BEFORE YOU BEGIN

⚠ **WARNING**

- **Turn off the power at the circuit breaker** before installing, changing bulbs or cleaning the fixture.
- Installation by a **qualified electrician** is recommended. Install in accordance with local electrical codes.
- Use the E12 LED bulbs supplied, or equivalents of the same rating.
- Do not clean the fixture with corrosive substances such as gasoline or alcohol-based disinfectants.
- Use this fixture only for its intended purpose. Do not modify or rewire it.
- Keep small parts and packaging away from children. They can cause serious injury.
- For indoor use only.

PREPARATION


- Read every step carefully and follow them in order.
- Unpack and check all parts against the parts list. If anything is missing or damaged, contact us before installing (see the last page). We will send replacement parts promptly.
- Assemble the fixture where it will be installed. Moving it mid-assembly risks losing small parts.

SPECIFICATIONS

LIGHT SOURCE	COLOR TEMPERATURE	MOUNTING
E12 LED bulbs, 3 W each	**2700K**	**Ceiling, adjustable cables**

IN THE BOX



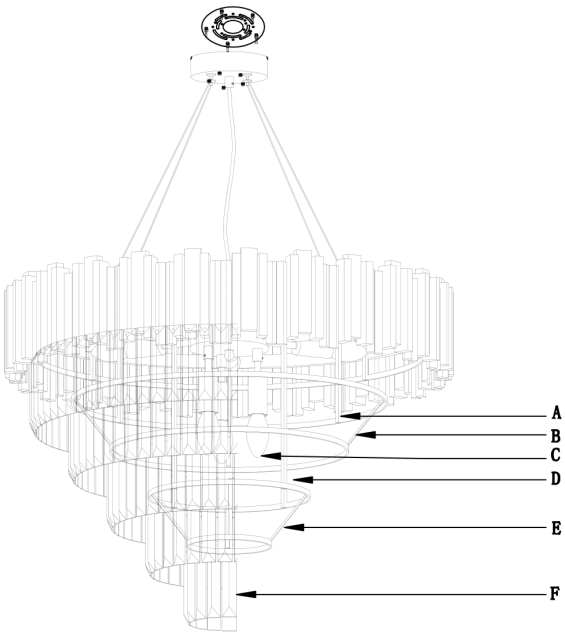


PART	QTY	DESCRIPTION
A, D	× 8	Square rod (A 4 × 120 mm, D 4 × 270 mm)
B, E	× 2	Ring, D490 (B) and D250 (E)
G	× 1	Top ring (D120)
C	× 9	E12 bulb
F	× 228	Crystal strip
—	× 12	Wire connector, screw, wall anchor (4 each)
—	× 1	Mounting plate
—	× 2	Glove

INSTALLATION

STEP 1

Mount the crossbar


Turn off the power at the circuit breaker. Remove the crossbar from the mounting base and fix it to the junction box with the screws.

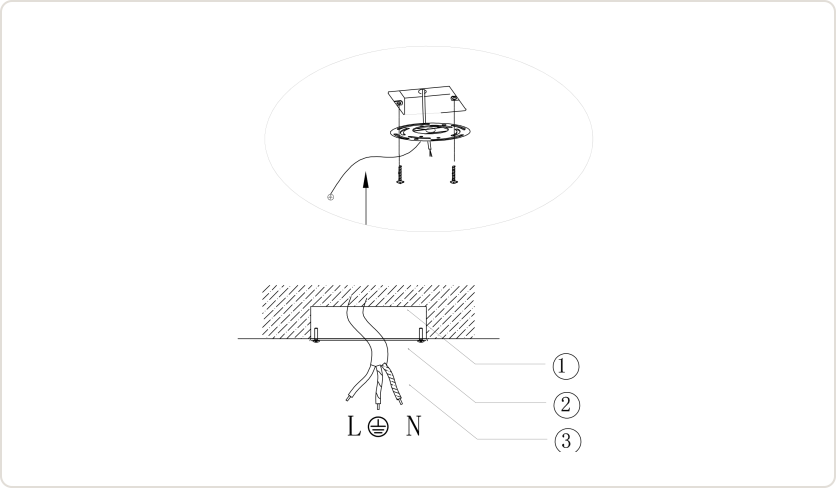

STEP 2

Assemble the lamp body


Take out the lamp body. Join the rod tubes in order to the length you want, thread the power cable from the lamp body through the tubes into the ceiling plate, and secure the lamp body and tubes with the lock clip.

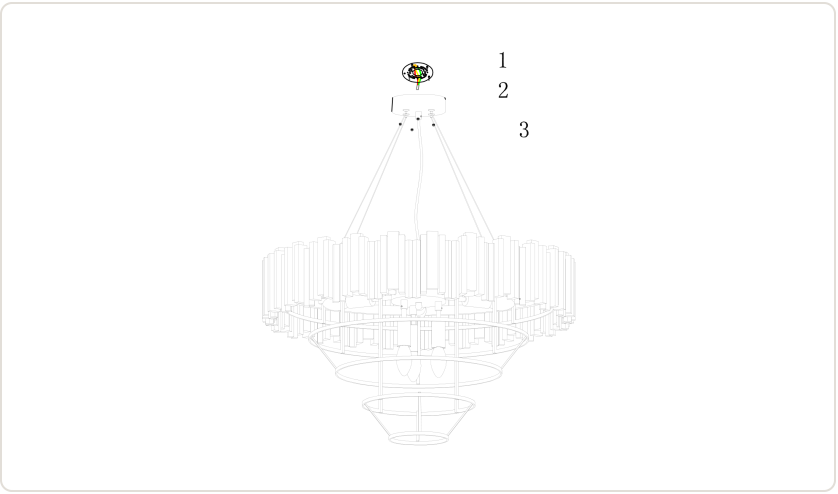

STEP 3

Connect and fix the canopy


Join the fixture wires to the matching house supply wires with the wire connectors: live to live, neutral to neutral, ground to ground. Tuck the connections neatly into the junction box. Fix the ceiling plate to the crossbar.

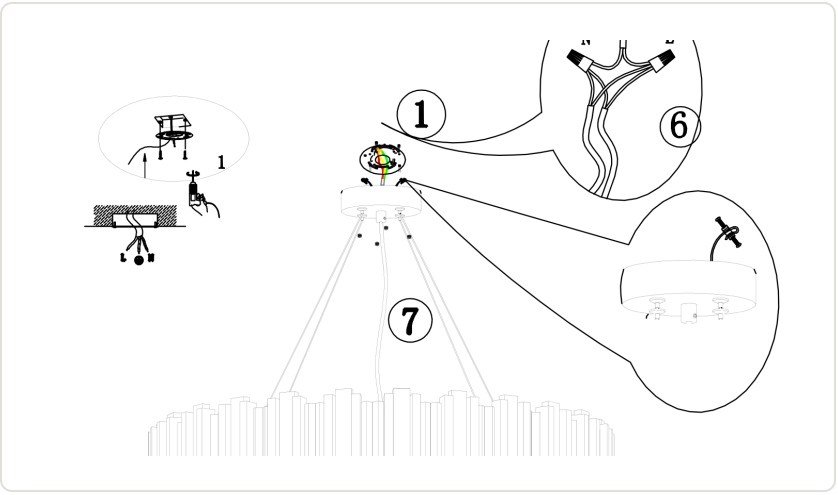

STEP 4

Fit the lower rings


Lock the four 120 mm rods (A) on the frame and fit the large ring (B) on them. Then lock the four 270 mm rods (D) and fit the small ring (E).

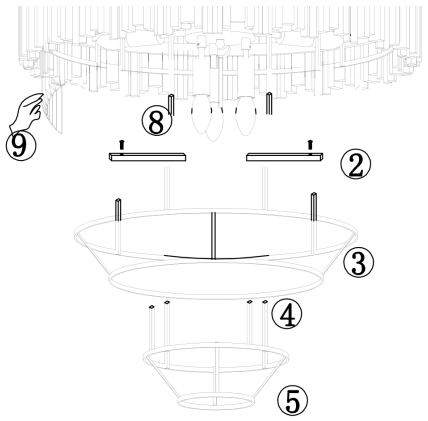

STEP 5

Fit the bulbs and crystals

Screw the E12 bulbs (C) into the lamp holders and hang the crystal strips (F) on the rings. Restore power and switch on to test.

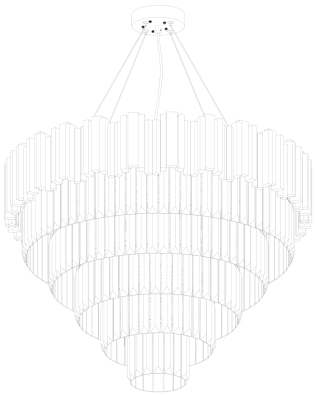

CARE & SUPPORT

CLEANING & CARE

- Clean the fixture about once a month to keep it looking its best.
- Turn off the power and let the fixture cool to room temperature first.
- Wipe with a soft cloth dampened with water and wrung dry. Never spray liquid directly onto the fixture.
- Do not use gasoline, alcohol or other corrosive cleaners.

GOOD TO KNOW

- Use the fixture only as designed. Damage caused by modification, third-party parts or natural disasters is not covered.
- Warranty terms are listed at yiosilamp.com.
- Each piece is handmade, so dimensions may vary slightly.

NEED HELP?

support@yiosilamp.com

+1 970-896-9411

Missing parts, installation questions or anything else, we are here to help. Please include your order number and a photo of the issue so we can resolve it quickly.