YIOSI

INSTALLATION GUIDE

Inverted Triangle Crystal Round Pendant 910

CHANDELIER · CEILING MOUNT



Model **YIOSI-0642**

Please read this guide completely before you begin, and keep it for future reference.

BEFORE YOU BEGIN

⚠ **WARNING**

- **Turn off the power at the circuit breaker** before installing, changing bulbs or cleaning the fixture.
- Installation by a **qualified electrician** is recommended. Install in accordance with local electrical codes.
- This fixture uses 12 E12 bulbs, 3 W each (supplied). Replace only with bulbs of the same type and rating.
- Do not clean the fixture with corrosive substances such as gasoline or alcohol-based disinfectants.
- Use this fixture only for its intended purpose. Do not modify or rewire it.
- Keep small parts and packaging away from children. They can cause serious injury.
- For indoor use only.


PREPARATION


- Read every step carefully and follow them in order.
- Unpack and check all parts against the parts list. If anything is missing or damaged, contact us before installing (see the last page). We will send replacement parts promptly.
- Assemble the fixture where it will be installed. Moving it mid-assembly risks losing small parts.

SPECIFICATIONS

LIGHT SOURCE	COLOR TEMPERATURE	MOUNTING
12 × E12 bulbs, 3 W each (included)	**2700K**	**Ceiling, adjustable chain**

IN THE BOX

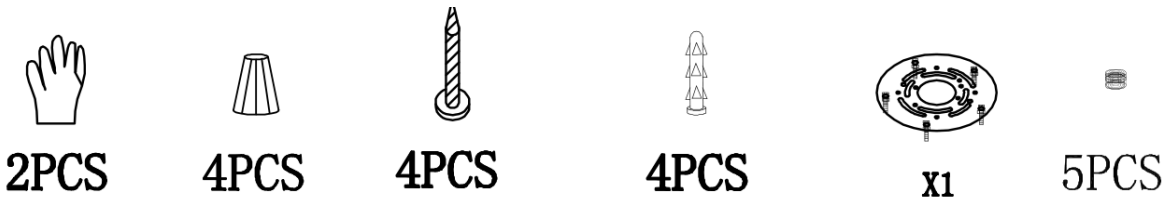

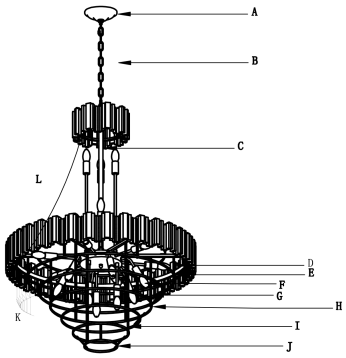


PART	QTY	DESCRIPTION
A	× 1	Canopy (ceiling plate)
B	× 1	Chain
C	× 1	Centre tube, D20 × 710 mm
D, G, I	× 15	Support: 6 × 115 mm, 6 × 255 mm, 3 × 395 mm
E, H, J	× 3	Ring: D710, D490, D270 (1 each)
F	× 12	E12 bulb
K, L	× 468	Crystals: 210 long + 210 short strips (K), 48 upper-tier strings (L)
—	× 1	Hardware pack (gloves, wire connectors, screws, wall anchors, small fittings)

INSTALLATION

STEP 1

Mount the crossbar


Turn off the power at the circuit breaker. Remove the crossbar from the canopy (A) and fix it to the ceiling junction box with the screws.

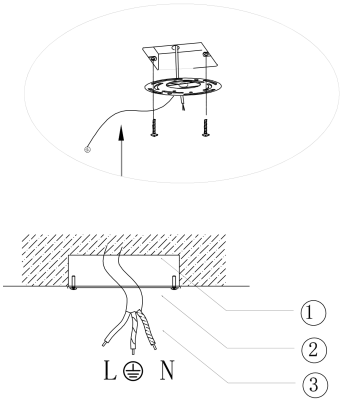

STEP 2

Build the lower tiers


Take out the lamp body and check that it is firm. Fit the supports (D, G, I) into the bracket under the lamp body and lock the rings onto them tier by tier: the D710 ring (E), then the D490 ring (H), then the D270 ring (J), as shown.

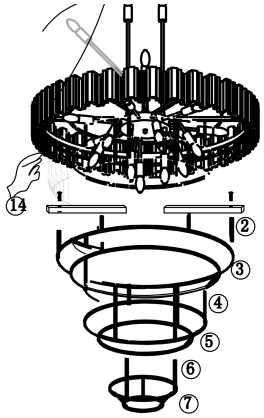

STEP 3

Fit the tube, upper tier and chain

Install the centre tube (C) on the main body, lock the upper ring onto it, then lock the chain (B) onto the top ring.

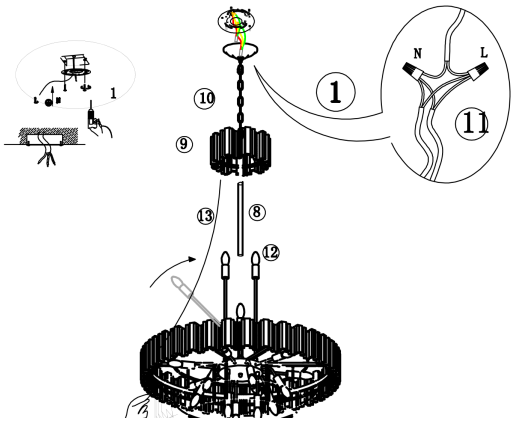

STEP 4


Hang and connect

Hook the chain (B) onto the canopy (A) and adjust it to the height you want. Join the fixture wires to the matching house supply wires with the wire connectors: live to live, neutral to neutral, ground to ground. Fix the canopy to the crossbar.

STEP 5

Fit the bulbs and crystals

Screw the E12 bulbs (F) into the lamp holders. Hang the crystal strings (L) on the flat ring of the upper tier, then hang the long and short crystal strips (K) alternately on the lower rings. Restore power and switch on to test.

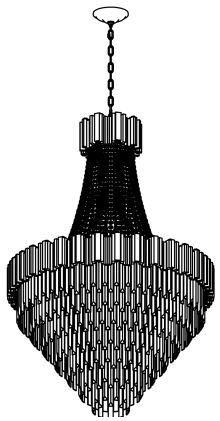

CARE & SUPPORT

CLEANING & CARE

- Clean the fixture about once a month to keep it looking its best.
- Turn off the power and let the fixture cool to room temperature first.
- Wipe with a soft cloth dampened with water and wrung dry. Never spray liquid directly onto the fixture.
- Do not use gasoline, alcohol or other corrosive cleaners.

GOOD TO KNOW

- Use the fixture only as designed. Damage caused by modification, third-party parts or natural disasters is not covered.
- Warranty terms are listed at yiosilamp.com.
- The canopy suits flat and sloped ceilings.
- Each fixture is handmade, so slight variations in dimensions may occur.

NEED HELP?

support@yiosilamp.com

+1 970-896-9411

Missing parts, installation questions or anything else, we are here to help. Please include your order number and a photo of the issue so we can resolve it quickly.