
YIOSI

INSTALLATION GUIDE

Alabaster Wagon Wheel Chandelier

CHANDELIER · CEILING MOUNT

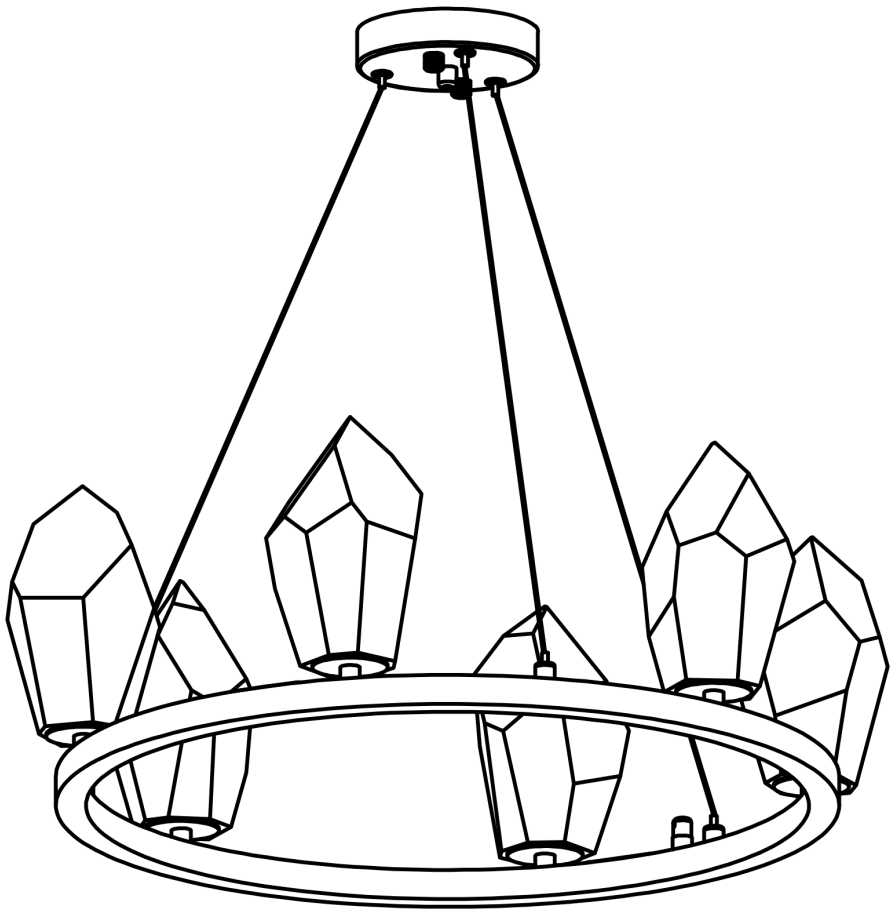

Model **YIOSI-0655** · **YIOSI-0656**

Please read this guide completely before you begin, and keep it for future reference.

BEFORE YOU BEGIN

⚠ **WARNING**

- **Turn off the power at the circuit breaker** before installing, changing bulbs or cleaning the fixture.
- Installation by a **qualified electrician** is recommended. Install in accordance with local electrical codes.
- The size shown requires 6 G9 bulbs, max. 20 W each. Do not exceed the rated wattage.
- Do not clean the fixture with corrosive substances such as gasoline or alcohol-based disinfectants.
- Use this fixture only for its intended purpose. Do not modify or rewire it.
- Keep small parts and packaging away from children. They can cause serious injury.


PREPARATION

- Read every step carefully and follow them in order.
- Unpack and check all parts against the parts list. If anything is missing or damaged, contact us before installing (see the last page). We will send replacement parts promptly.
- Assemble the fixture where it will be installed. Moving it mid-assembly risks losing small parts.
- This guide shows one size. Other sizes in the same series install the same way.

SPECIFICATIONS


LIGHT SOURCE	MAX. WATTAGE	MOUNTING
G9 bulbs (6 on the size shown)	**20 W per bulb**	**Ceiling, adjustable cables**

IN THE BOX

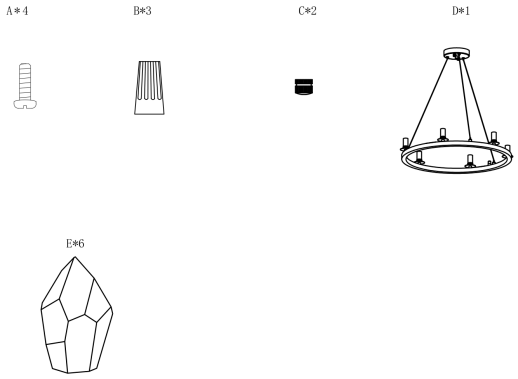

PART	QTY	DESCRIPTION
A	× 4	Screw
B	× 3	Wire connector
C	× 2	Fitting
D	× 1	Chandelier frame with canopy
E	× 6	Alabaster shade

ASSEMBLY OVERVIEW




INSTALLATION

STEP 1

Set the cable lengths


Decide how low the chandelier should hang and adjust the hanging cables and wire to the length you need.

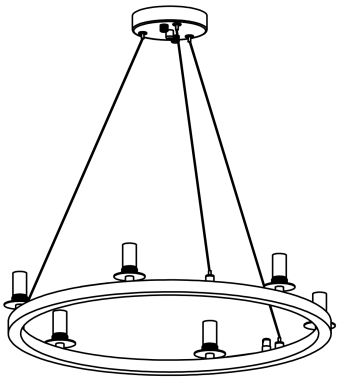

STEP 2

Mount the bracket and connect


Turn off the power at the circuit breaker. Remove the mounting bracket from the canopy and fix it to the ceiling junction box with the screws (A). Join the fixture wires to the matching house supply wires with the wire connectors (B): live to live, neutral to neutral, ground to ground.

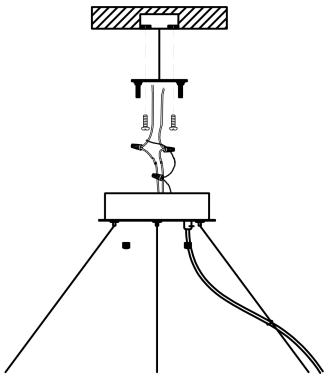

STEP 3

Secure the canopy


Lift the canopy up to the bracket and fasten it in place with the fittings (C).

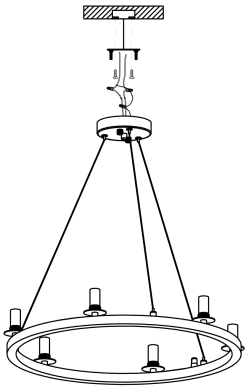

STEP 4

Fit the bulbs and shades

Install the G9 bulbs and fit an alabaster shade (E) over each one. To change the height, press the small pin into the canopy and slide the cable. Restore power and switch on to test.

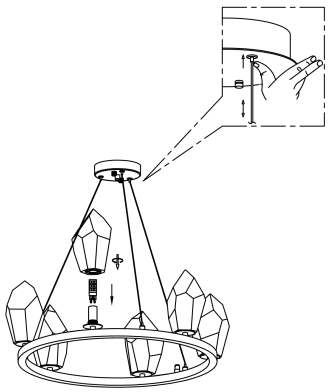

CARE & SUPPORT

CLEANING & CARE

- Clean the fixture about once a month to keep it looking its best.
- Turn off the power and let the fixture cool to room temperature first.
- Wipe with a soft cloth dampened with water and wrung dry. Never spray liquid directly onto the fixture.
- Do not use gasoline, alcohol or other corrosive cleaners.

GOOD TO KNOW

- Use the fixture only as designed. Damage caused by modification, third-party parts or natural disasters is not covered.
- Warranty terms are listed at yiosilamp.com.
- Natural stone varies piece to piece. Veining and tone differences are part of its character.

NEED HELP?

support@yiosilamp.com

+1 970-896-9411

Missing parts, installation questions or anything else, we are here to help. Please include your order number and a photo of the issue so we can resolve it quickly.