
YIOSI

INSTALLATION GUIDE

65" Hook Plate Clear Glass Linear Chandelier

CHANDELIER · CEILING MOUNT

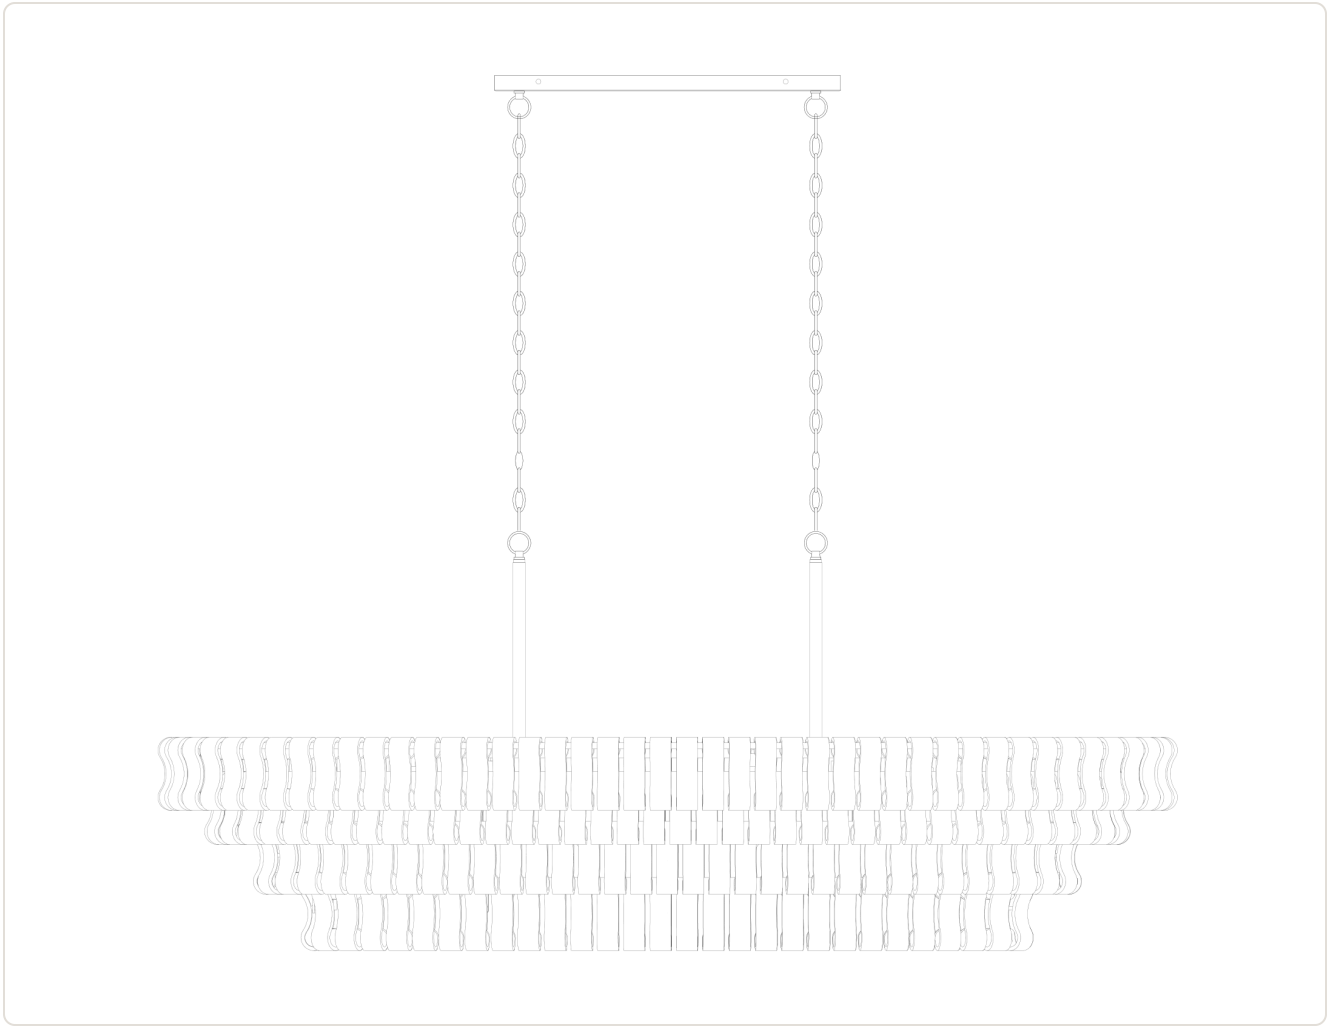

Model **YIOSI-0671** · **YIOSI-0672**

Please read this guide completely before you begin, and keep it for future reference.

BEFORE YOU BEGIN

⚠ **WARNING**

- **Turn off the power at the circuit breaker** before installing, changing bulbs or cleaning the fixture.
- Installation by a **qualified electrician** is recommended. Install in accordance with local electrical codes.
- This fixture uses 12 E12 bulbs (supplied bulbs: 3 W each). Max. 40 W per bulb. Do not exceed the rated wattage.
- Do not clean the fixture with corrosive substances such as gasoline or alcohol-based disinfectants.
- Use this fixture only for its intended purpose. Do not modify or rewire it.
- Keep small parts and packaging away from children. They can cause serious injury.


PREPARATION

- Read every step carefully and follow them in order.
- Unpack and check all parts against the parts list. If anything is missing or damaged, contact us before installing (see the last page). We will send replacement parts promptly.
- Assemble the fixture where it will be installed. Moving it mid-assembly risks losing small parts.

SPECIFICATIONS

LIGHT SOURCE	MAX. WATTAGE	COLOR TEMPERATURE
12 × E12 bulbs (included)	**40 W per bulb**	**2700K**

IN THE BOX

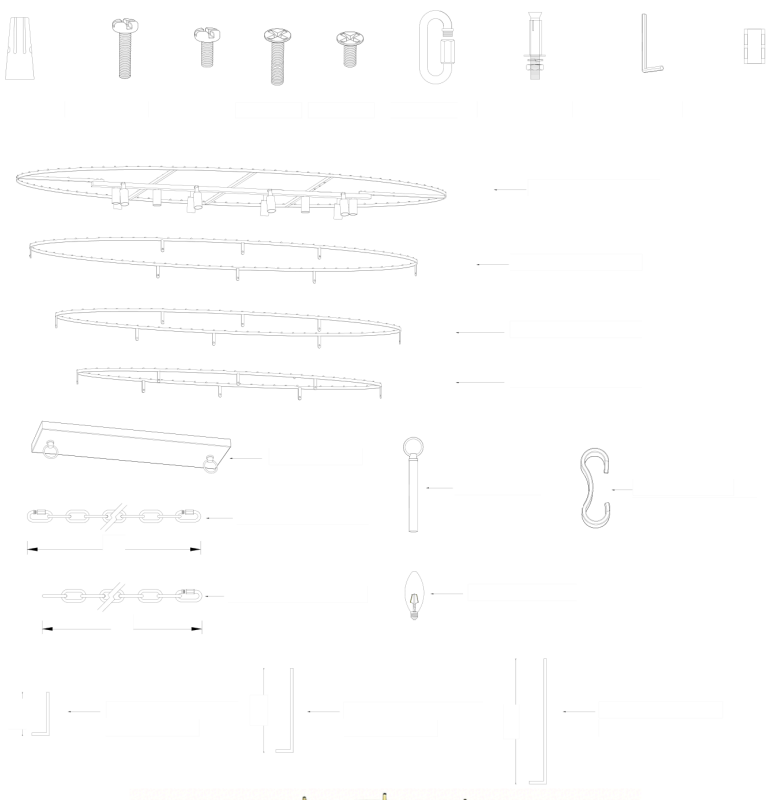


PART	QTY	DESCRIPTION
A–D	× 4	Light frame section (1 each)
E	× 1	Canopy
F, G	× 8	Chain: 6 long (39") + 2 short (25")
H, I, J	× 22	Connector: 8 short, 8 middle, 6 long
K	× 2	Boom
L	× 292	Glass piece (+5 spare)
M	× 12	E12 bulb (+2 spare)
—	× 1	Hardware pack (screws, wall anchors, wire connectors, hooks, hex key)

INSTALLATION

STEP 1

Assemble the frame


Lay out the frame sections (A, B, C, D) and join them with the connectors (H, I, J) as shown.

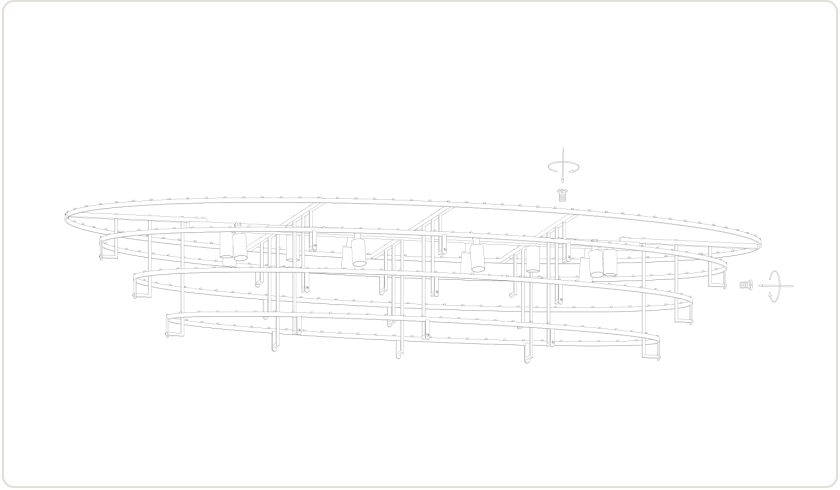

STEP 2

Fit the booms and chains


Route the fixture wire through a boom (K) into the frame. Link each boom (K) to the canopy (E) with the chains (F, G), and feed the power cord up into the canopy.

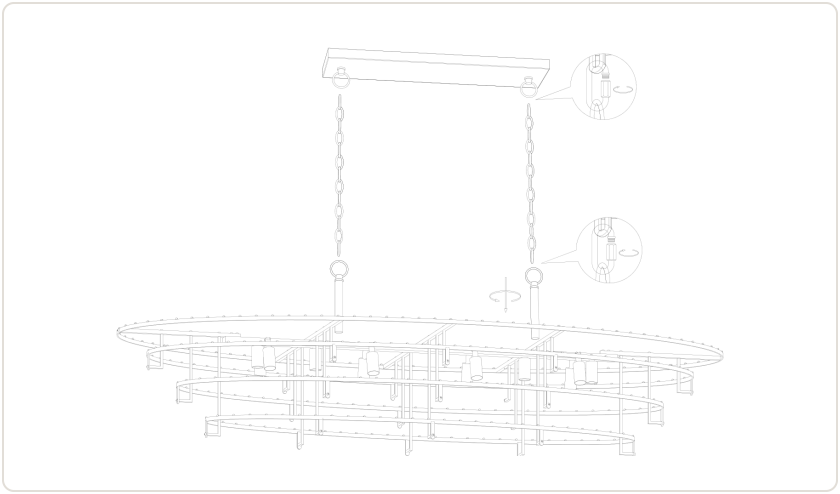

STEP 3

Mount and connect


Turn off the power at the circuit breaker. Fix the mounting plate to the ceiling with the screws and anchors. Pass the steel cables through the holes of the plate and lock them. Join the fixture wires to the matching house supply wires with the wire connectors: live to live, neutral to neutral, ground to ground. Fasten the canopy (E) to the mounting plate.

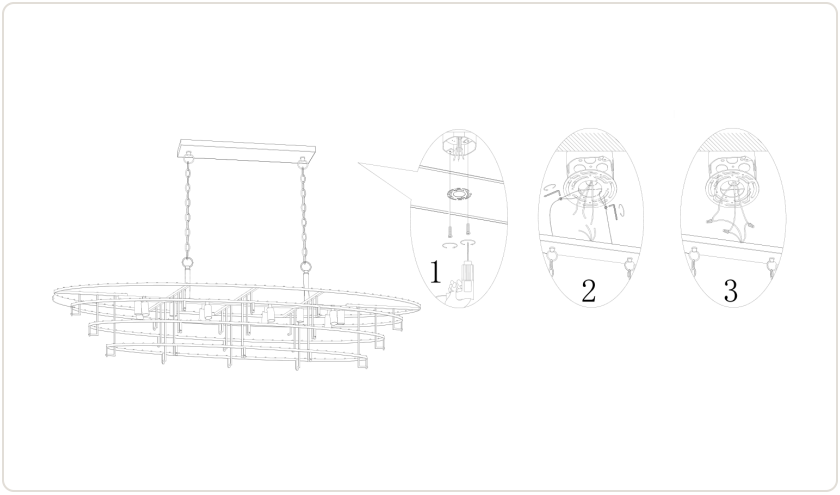

STEP 4

Fit the bulbs and glass

Screw the 12 E12 bulbs (M) into the lamp holders. Hang the glass pieces (L) on the frame layer by layer, using the count for each layer: 89, 78, 68 and 57 pieces. Restore power and switch on to test.

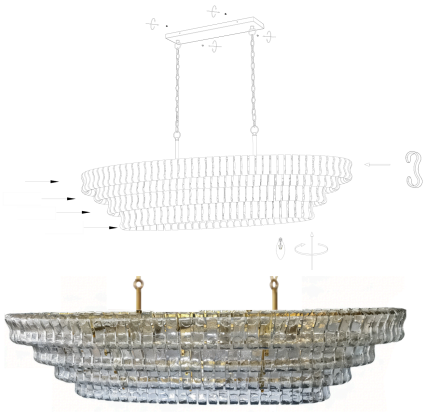

CARE & SUPPORT

CLEANING & CARE

- Clean the fixture about once a month to keep it looking its best.
- Turn off the power and let the fixture cool to room temperature first.
- Wipe with a soft cloth dampened with water and wrung dry. Never spray liquid directly onto the fixture.
- Do not use gasoline, alcohol or other corrosive cleaners.

GOOD TO KNOW

- Use the fixture only as designed. Damage caused by modification, third-party parts or natural disasters is not covered.
- Warranty terms are listed at yiosilamp.com.

NEED HELP?

support@yiosilamp.com

+1 970-896-9411

Missing parts, installation questions or anything else, we are here to help. Please include your order number and a photo of the issue so we can resolve it quickly.