
YIOSI

INSTALLATION GUIDE

18" 16-Light Crystal Wagon Wheel Chandelier

CHANDELIER · CEILING MOUNT

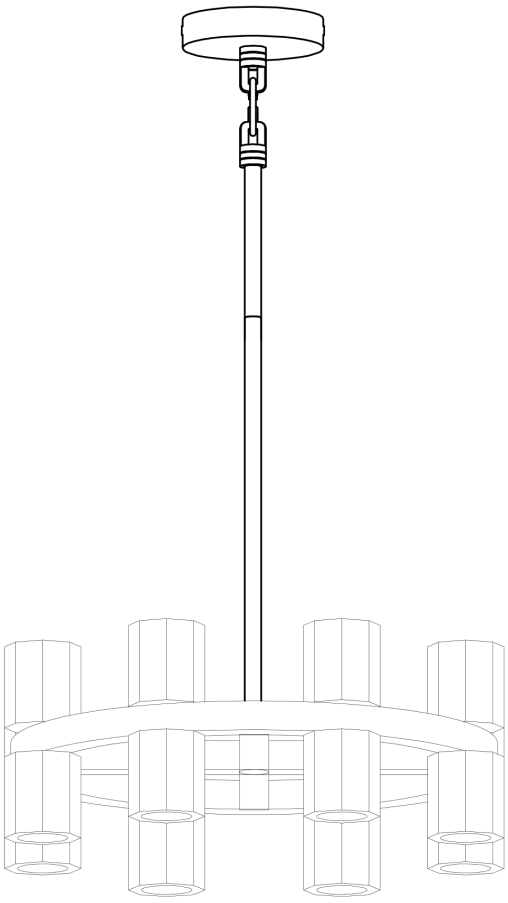

Model **YIOSI-0714**

Please read this guide completely before you begin, and keep it for future reference.

BEFORE YOU BEGIN

⚠ **WARNING**

- **Turn off the power at the circuit breaker** before installing, changing bulbs or cleaning the fixture.
- Installation by a **qualified electrician** is recommended. Install in accordance with local electrical codes.
- This fixture uses 16 G4 bulbs, 3 W each (supplied). Replace only with bulbs of the same type and rating.
- Do not clean the fixture with corrosive substances such as gasoline or alcohol-based disinfectants.
- Use this fixture only for its intended purpose. Do not modify or rewire it.
- Keep small parts and packaging away from children. They can cause serious injury.


PREPARATION

- Read every step carefully and follow them in order.
- Unpack and check all parts against the parts list. If anything is missing or damaged, contact us before installing (see the last page). We will send replacement parts promptly.
- Assemble the fixture where it will be installed. Moving it mid-assembly risks losing small parts.

SPECIFICATIONS

LIGHT SOURCE	WATTAGE	COLOR TEMPERATURE
16 × G4 bulbs (included)	**3 W per bulb**	**3000K**

IN THE BOX

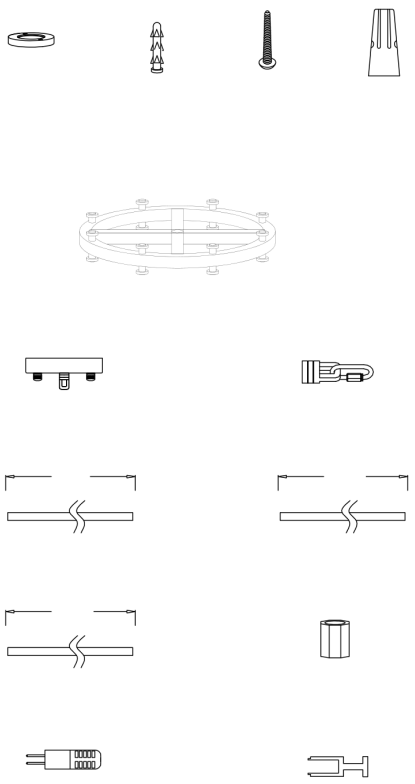


PART	QTY	DESCRIPTION
A	× 1	Main lamp frame
B	× 1	Canopy
C	× 1	Ring lock buckle
D, E, F	× 8	Round rod: 2 (D), 4 (E), 2 (F)
G	× 16	Crystal (+1 spare)
H	× 16	G4 bulb (+2 spare)
I	× 2	Clamping wrench
—	× 1	Hardware pack (washer, wall anchors, screws, wire connectors)

INSTALLATION

STEP 1

Fit the crystals and bulbs


Twist off the ring clip on each arm of the lamp frame (A), fit a crystal (G) and tighten the ring clip again. Insert the 16 G4 bulbs (H) into the lamp holders.

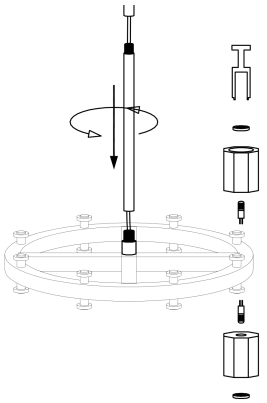

STEP 2

Assemble the rods


Pass the power cord through the round rods (D, E, F) and screw the rods together and into the lamp frame to get the height you want. Connect the top rod to the canopy (B) with the ring lock buckle (C) and feed the cord into the canopy.

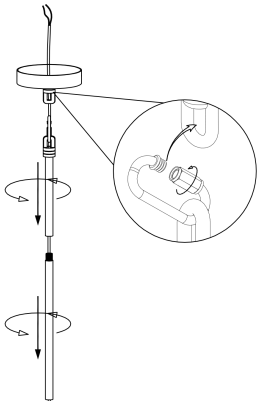

STEP 3

Mount the plate


Turn off the power at the circuit breaker. Remove the mounting plate from the canopy and fix it to the ceiling junction box with the screws.

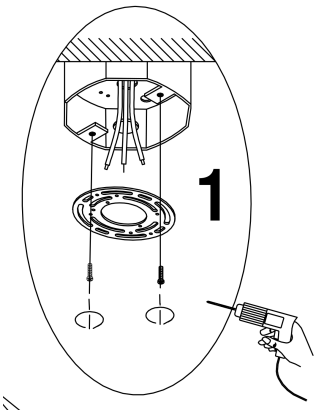

STEP 4

Connect and secure

Join the fixture wires to the matching house supply wires with the wire connectors: live to live, neutral to neutral, ground to ground. Tighten the canopy (B) onto the mounting plate. Restore power and switch on to test.

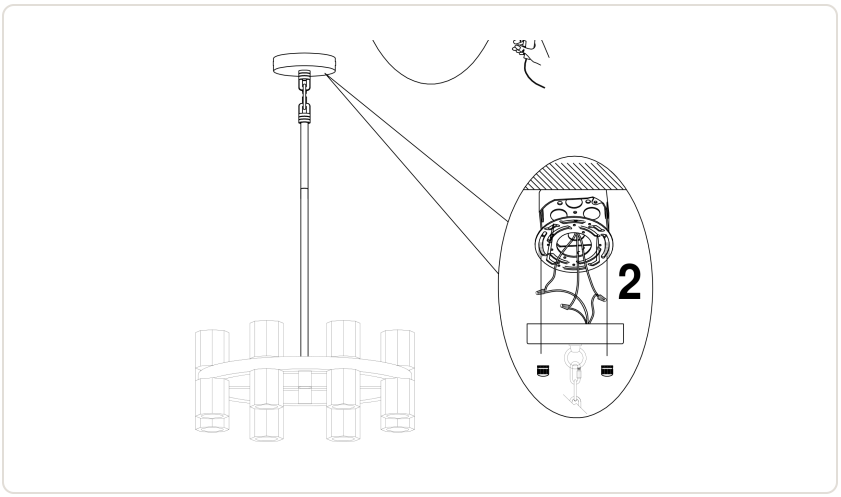

CARE & SUPPORT

CLEANING & CARE

- Clean the fixture about once a month to keep it looking its best.
- Turn off the power and let the fixture cool to room temperature first.
- Wipe with a soft cloth dampened with water and wrung dry. Never spray liquid directly onto the fixture.
- Do not use gasoline, alcohol or other corrosive cleaners.

GOOD TO KNOW

- Use the fixture only as designed. Damage caused by modification, third-party parts or natural disasters is not covered.
- Warranty terms are listed at yiosilamp.com.

NEED HELP?

support@yiosilamp.com

+1 970-896-9411

Missing parts, installation questions or anything else, we are here to help. Please include your order number and a photo of the issue so we can resolve it quickly.