YIOSI

INSTALLATION GUIDE

Natural Alabaster 31.5" Round Chandelier

CHANDELIER · CEILING MOUNT



Model **YIOSI-0728**

Please read this guide completely before you begin, and keep it for future reference.

BEFORE YOU BEGIN

⚠ **WARNING**

- **Turn off the power at the circuit breaker** before installing, changing bulbs or cleaning the fixture.
- Installation by a **qualified electrician** is recommended. Install in accordance with local electrical codes.
- Use only the E12 bulbs supplied, or equivalents of the same rating.
- Do not clean the fixture with corrosive substances such as gasoline or alcohol-based disinfectants.
- Use this fixture only for its intended purpose. Do not modify or rewire it.
- Keep small parts and packaging away from children. They can cause serious injury.


PREPARATION

- Read every step carefully and follow them in order.
- Unpack and check all parts against the parts list. If anything is missing or damaged, contact us before installing (see the last page). We will send replacement parts promptly.
- Assemble the fixture where it will be installed. Moving it mid-assembly risks losing small parts.

SPECIFICATIONS


LIGHT SOURCE	COLOR TEMPERATURE	MOUNTING
12 × E12 bulbs (included)	**3000K**	**Ceiling, adjustable chain**


IN THE BOX

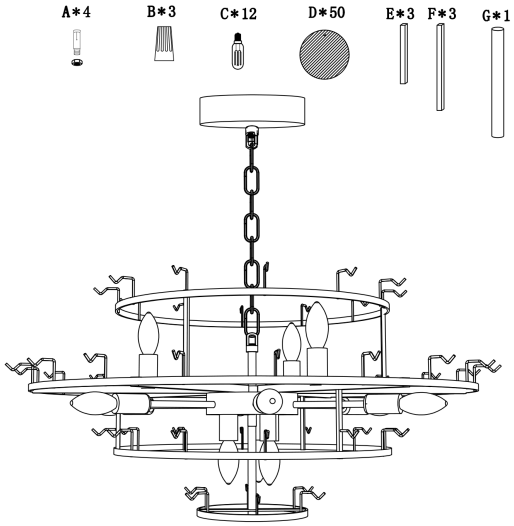

PART	QTY	DESCRIPTION
A	× 4	Screw with wall anchor
B	× 3	Wire connector
C	× 12	E12 bulb
D	× 50	Alabaster disc
E, F	× 3 + 3	Square supports, short and long
G	× 1	Round tube
—	× 1	Chandelier body

PACKAGING



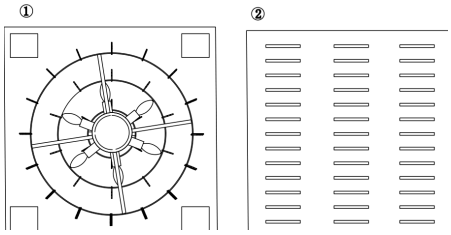


The fixture ships in two layers: (1) chandelier frame and hardware; (2) alabaster discs.

INSTALLATION

STEP 1

Install the mounting plate


Turn off the power at the circuit breaker. Take the mounting plate out of the canopy and fix it to the ceiling with the screws and anchors (A).

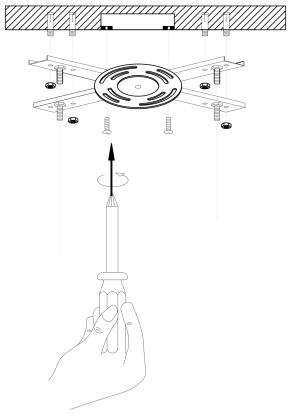

STEP 2

Hang the chandelier body


Take out the chandelier body. Join the fixture wires to the matching house supply wires with the wire connectors (B): live to live, neutral to neutral, ground to ground. Fasten the canopy to the mounting plate with its screws, then hook the chain onto the canopy loop and adjust the height.

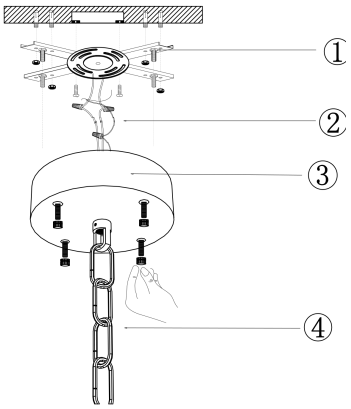

STEP 3

Assemble the alabaster

(1) Hook the lamp-body ring onto the chain buckle. Screw the square supports (E, F) to the frame. Fix the lower tier to the round tube with the nuts. (2) Screw in the E12 bulbs (C), test them, then turn the power off again. (3) Hang the alabaster discs (D) on the hooks of all 4 tiers. Restore power.

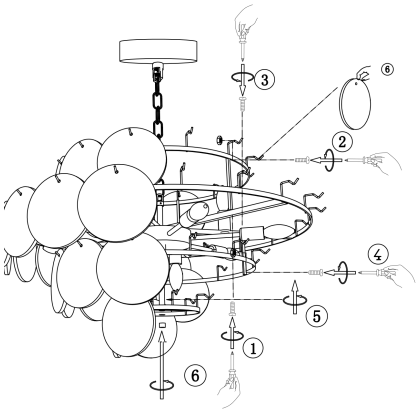

CARE & SUPPORT

CLEANING & CARE

- Clean the fixture about once a month to keep it looking its best.
- Turn off the power and let the fixture cool to room temperature first.
- Wipe with a soft cloth dampened with water and wrung dry. Never spray liquid directly onto the fixture.
- Do not use gasoline, alcohol or other corrosive cleaners.

GOOD TO KNOW

- Use the fixture only as designed. Damage caused by modification, third-party parts or natural disasters is not covered.
- Warranty terms are listed at yiosilamp.com.
- Natural alabaster varies piece to piece. Veining and tone differences are part of its character.

NEED HELP?

support@yiosilamp.com

+1 970-896-9411

Missing parts, installation questions or anything else, we are here to help. Please include your order number and a photo of the issue so we can resolve it quickly.