
YIOSI

INSTALLATION GUIDE

Double Head Alabaster Round Tube Wall Sconce

WALL SCONCE · WALL MOUNT

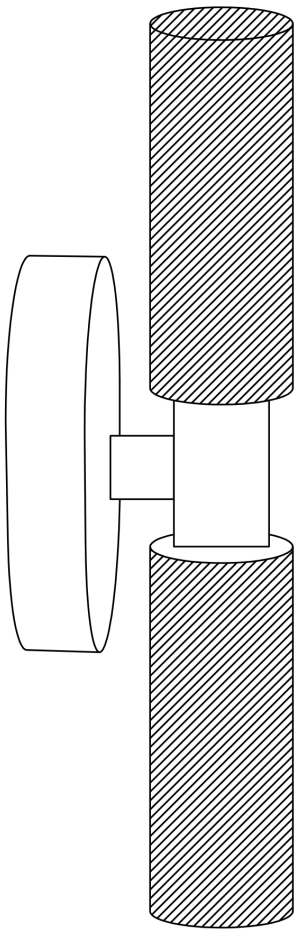

Model **YIOSI-0733** · **YIOSI-0734** · **YIOSI-0735**

Please read this guide completely before you begin, and keep it for future reference.

BEFORE YOU BEGIN

⚠ **WARNING**

- **Turn off the power at the circuit breaker** before installing, changing bulbs or cleaning the fixture.
- Installation by a **qualified electrician** is recommended. Install in accordance with local electrical codes.
- Use only the E12 bulbs supplied, or equivalents of the same rating.
- Do not clean the fixture with corrosive substances such as gasoline or alcohol-based disinfectants.
- Use this fixture only for its intended purpose. Do not modify or rewire it.
- Keep small parts and packaging away from children. They can cause serious injury.


PREPARATION


- Read every step carefully and follow them in order.
- Unpack and check all parts against the parts list. If anything is missing or damaged, contact us before installing (see the last page). We will send replacement parts promptly.
- Assemble the fixture where it will be installed. Moving it mid-assembly risks losing small parts.

SPECIFICATIONS

LIGHT SOURCE	COLOR TEMPERATURE	MOUNTING
2 × E12 bulbs (included)	**3000K**	**Wall, over a junction box**


IN THE BOX

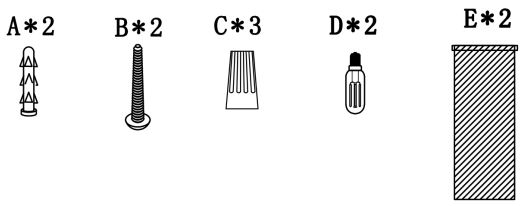




PART	QTY	DESCRIPTION
A	× 2	Wall anchor
B	× 2	Screw
C	× 3	Wire connector
D	× 2	E12 bulb
E	× 2	Alabaster tube
—	× 1	Lamp body

PACKAGING






The fixture ships in one layer: lamp body, alabaster tubes and accessory pack.

INSTALLATION

STEP 1

Install the mounting plate


Turn off the power at the circuit breaker. Fix the mounting plate to the wall junction box with the screws (B), using the wall anchors (A) where needed.

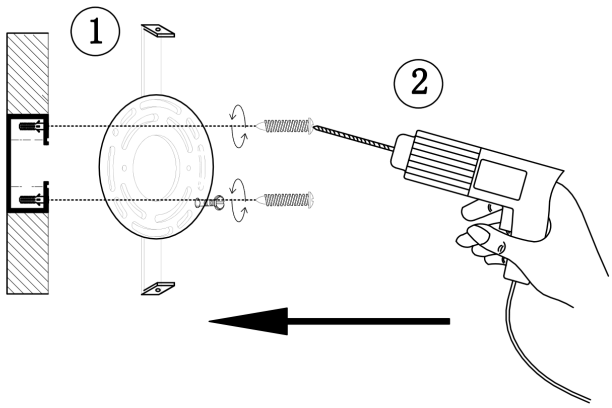

STEP 2

Connect the wires and attach the body


Join the fixture wires to the matching house supply wires with the wire connectors (C): live to live, neutral to neutral, ground to ground. Tuck the connections neatly into the junction box. Line up the holes in the lamp body backplate with the mounting plate and tighten the screws.

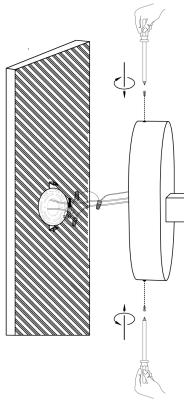

STEP 3

Fit the bulbs and alabaster tubes

Screw an E12 bulb (D) into each lamp holder and switch on briefly to test. Turn the power off again, then screw an alabaster tube (E) onto each end of the body, turning clockwise. Restore power.

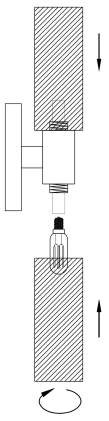

CARE & SUPPORT

CLEANING & CARE

- Clean the fixture about once a month to keep it looking its best.
- Turn off the power and let the fixture cool to room temperature first.
- Wipe with a soft cloth dampened with water and wrung dry. Never spray liquid directly onto the fixture.
- Do not use gasoline, alcohol or other corrosive cleaners.

GOOD TO KNOW

- Use the fixture only as designed. Damage caused by modification, third-party parts or natural disasters is not covered.
- Warranty terms are listed at yiosilamp.com.
- Natural alabaster varies piece to piece. Veining and tone differences are part of its character.

NEED HELP?

support@yiosilamp.com

+1 970-896-9411

Missing parts, installation questions or anything else, we are here to help. Please include your order number and a photo of the issue so we can resolve it quickly.