
YIOSI

INSTALLATION GUIDE

Alabaster Dome Pendant Light

PENDANT · CEILING MOUNT

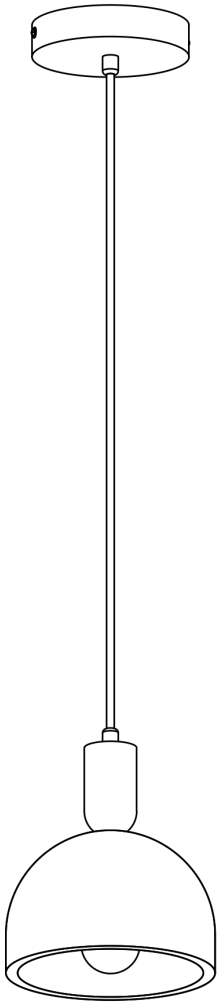

Model **YIOSI-0747** · **YIOSI-0748**

Please read this guide completely before you begin, and keep it for future reference.

BEFORE YOU BEGIN

⚠ **WARNING**

- **Turn off the power at the circuit breaker** before installing, changing bulbs or cleaning the fixture.
- Installation by a **qualified electrician** is recommended. Install in accordance with local electrical codes.
- This fixture requires 1 E12 bulb, max. 40 W. Do not exceed the rated wattage.
- Do not clean the fixture with corrosive substances such as gasoline or alcohol-based disinfectants.
- Use this fixture only for its intended purpose. Do not modify or rewire it.
- Keep small parts and packaging away from children. They can cause serious injury.


PREPARATION

- Read every step carefully and follow them in order.
- Unpack and check all parts against the parts list. If anything is missing or damaged, contact us before installing (see the last page). We will send replacement parts promptly.
- Assemble the fixture where it will be installed. Moving it mid-assembly risks losing small parts.
- This guide shows one size. Other sizes in the same series install the same way.

SPECIFICATIONS

LIGHT SOURCE	MAX. WATTAGE	MOUNTING
1 × E12 bulb	**40 W**	**Ceiling, adjustable cord**

IN THE BOX

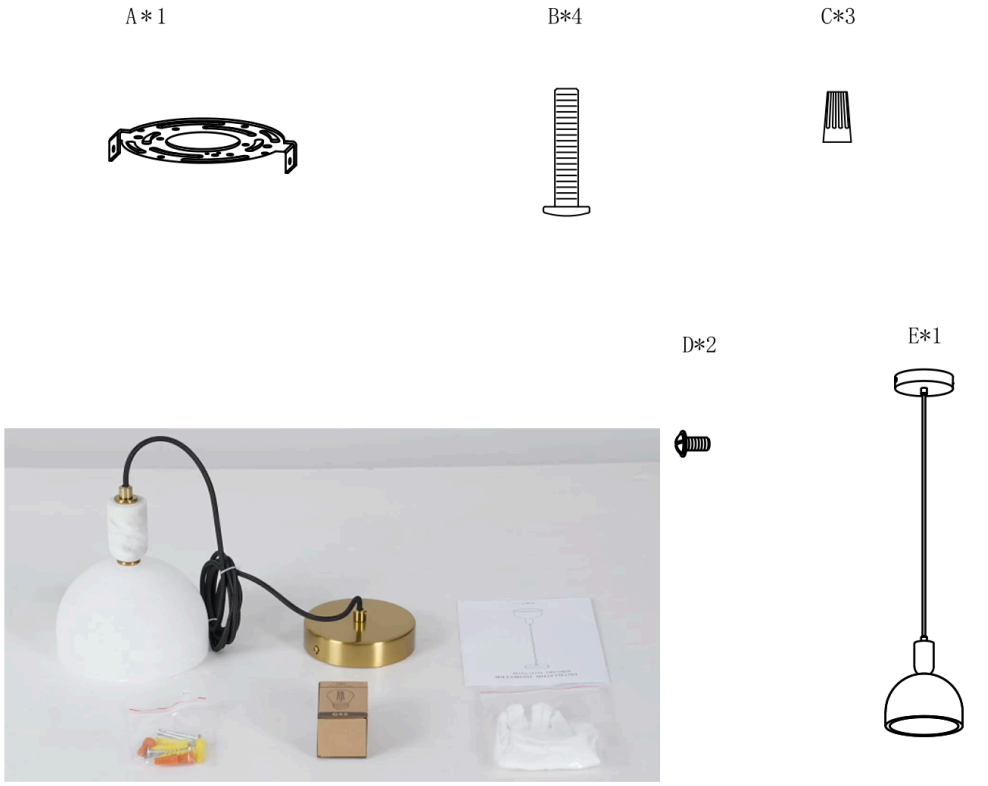

PART	QTY	DESCRIPTION
A	× 1	Mounting bracket
B	× 4	Screw
C	× 3	Wire connector
D	× 2	Canopy screw
E	× 1	Pendant with canopy and cord

INSTALLATION

STEP 1

Set the cord length

Decide how low the pendant should hang and adjust the cord to the length you need.



STEP 2

Mount the bracket


Turn off the power at the circuit breaker. Fix the mounting bracket (A) to the ceiling junction box with the screws (B).



STEP 3

Connect the wires

Join the fixture wires to the matching house supply wires with the wire connectors (C): live to live, neutral to neutral, ground to ground. Tuck the connections neatly into the junction box.

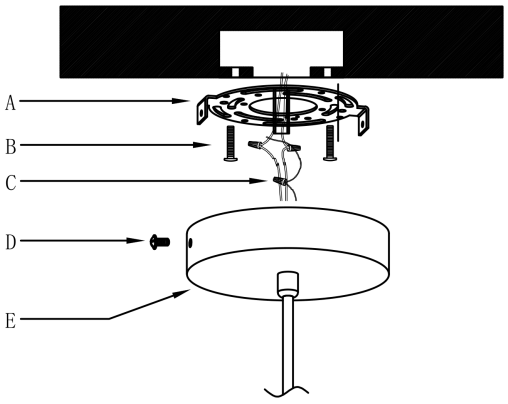

STEP 4

Secure the canopy

Lift the canopy up to the bracket and fasten it with the canopy screws (D).



STEP 5

Fit the bulb and test

Screw an E12 bulb into the lamp holder inside the alabaster shade. Restore power and switch on to test.



CARE & SUPPORT

CLEANING & CARE

- Clean the fixture about once a month to keep it looking its best.
- Turn off the power and let the fixture cool to room temperature first.
- Wipe with a soft cloth dampened with water and wrung dry. Never spray liquid directly onto the fixture.
- Do not use gasoline, alcohol or other corrosive cleaners.

GOOD TO KNOW

- Use the fixture only as designed. Damage caused by modification, third-party parts or natural disasters is not covered.
- Warranty terms are listed at yiosilamp.com.
- Natural alabaster varies piece to piece. Veining and tone differences are part of its character.

NEED HELP?

support@yiosilamp.com

+1 970-896-9411

Missing parts, installation questions or anything else, we are here to help. Please include your order number and a photo of the issue so we can resolve it quickly.