
YIOSI

INSTALLATION GUIDE

# Semicircle Alabaster Pendant

PENDANT · CEILING MOUNT

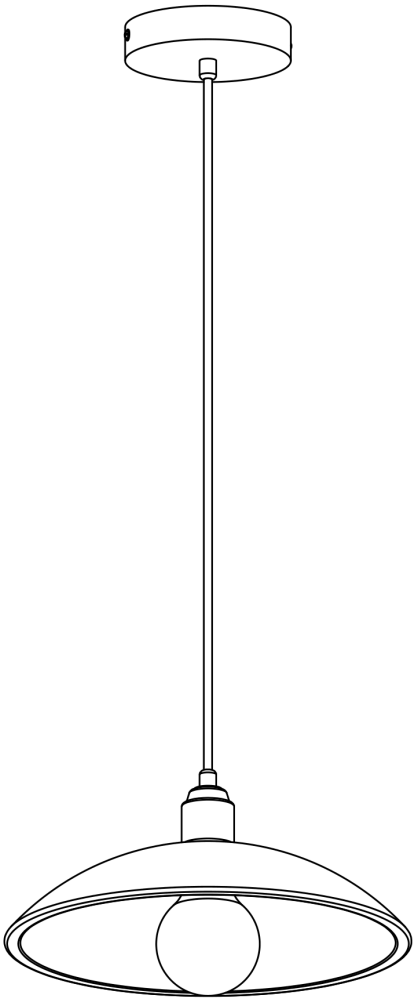

Model **YIOSI-0755** · **YIOSI-0756**

Please read this guide completely before you begin, and keep it for future reference.

# BEFORE YOU BEGIN

⚠ **WARNING**

- **Turn off the power at the circuit breaker** before installing, changing bulbs or cleaning the fixture.
- Installation by a **qualified electrician** is recommended. Install in accordance with local electrical codes.
- This fixture requires 1 E26 bulb, max. 40 W. Do not exceed the rated wattage.
- Do not clean the fixture with corrosive substances such as gasoline or alcohol-based disinfectants.
- Use this fixture only for its intended purpose. Do not modify or rewire it.
- Keep small parts and packaging away from children. They can cause serious injury.


## PREPARATION

- Read every step carefully and follow them in order.
- Unpack and check all parts against the parts list. If anything is missing or damaged, contact us before installing (see the last page). We will send replacement parts promptly.
- Assemble the fixture where it will be installed. Moving it mid-assembly risks losing small parts.
- This guide shows one size. Other sizes in the same series install the same way.

## SPECIFICATIONS

| LIGHT SOURCE | MAX. WATTAGE | MOUNTING |
|---|---|---|
| **1 × E26 bulb** | **40 W** | **Ceiling, adjustable cable** |

# IN THE BOX

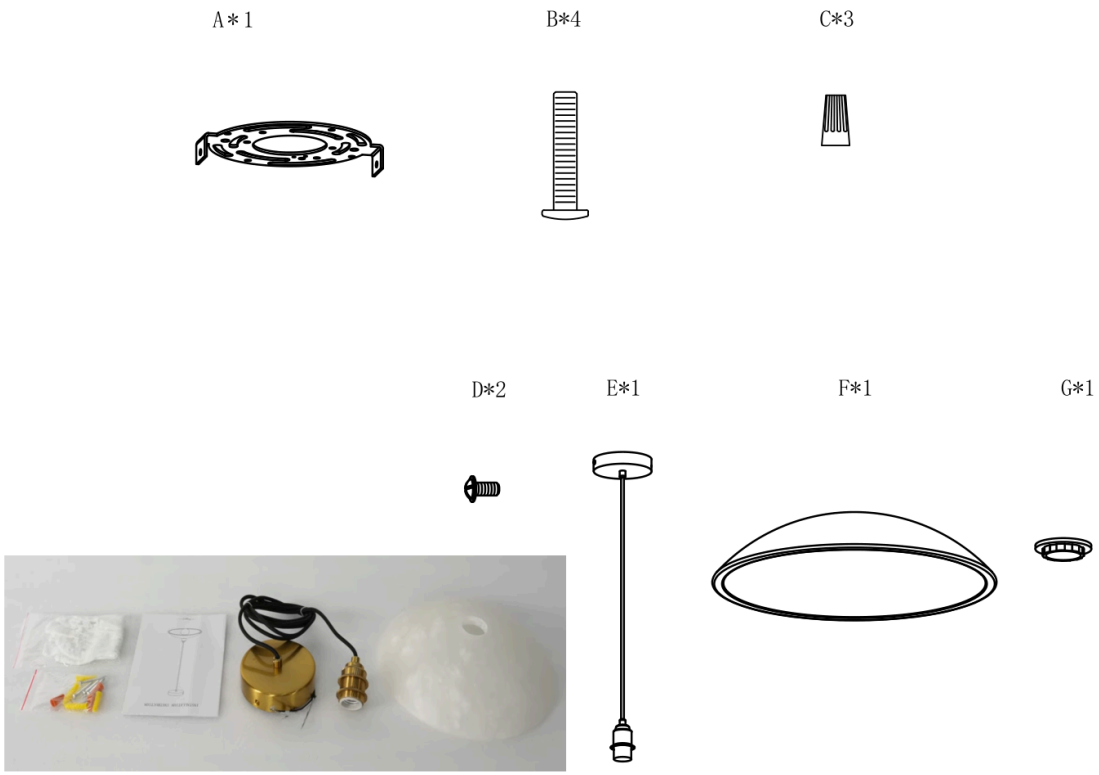


| PART | QTY | DESCRIPTION |
|---|---|---|
| A | × 1 | Mounting bracket |
| B | × 4 | Mounting screw |
| C | × 3 | Wire connector |
| D | × 2 | Canopy screw |
| E | × 1 | Canopy with cable and lamp holder |
| F | × 1 | Alabaster shade |
| G | × 1 | Shade ring |

# INSTALLATION

STEP 1

## Set the cable length


Decide how low the pendant should hang and adjust the hanging cable and wire to the length you need.



STEP 2

## Mount the bracket

Turn off the power at the circuit breaker. Remove the mounting bracket (A) from the canopy (E) and fix it to the ceiling junction box with the mounting screws (B).

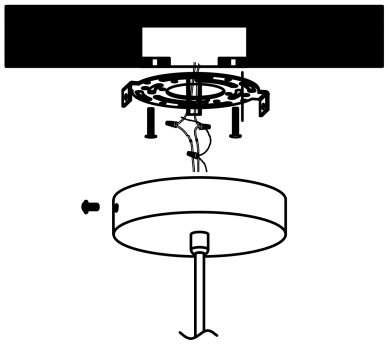

STEP 3

## Connect the wires


Join the fixture wires to the matching house supply wires with the wire connectors (C): live to live, neutral to neutral, ground to ground. Tuck the connections neatly into the junction box.



STEP 4

## Secure the canopy


Lift the canopy (E) up to the bracket and fasten it with the canopy screws (D).

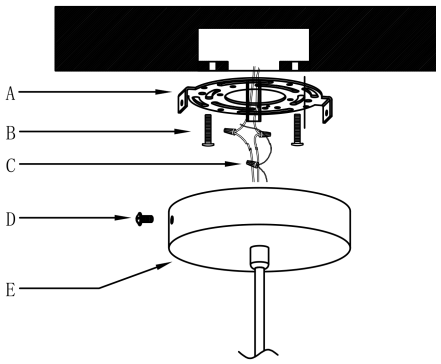


STEP 5

## Fit the shade

Slide the alabaster shade (F) over the lamp holder and screw the shade ring (G) on underneath to hold it. Handle the alabaster with clean gloves.

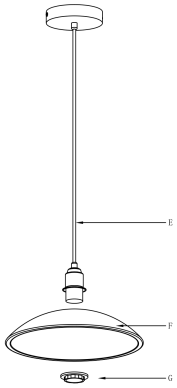



STEP 6

## Fit the bulb and test

Screw in an E26 bulb (max. 40 W). Restore power and switch on to test. Natural alabaster varies piece to piece. Veining and tone differences are part of its character.



# CARE & SUPPORT

## CLEANING & CARE

- Clean the fixture about once a month to keep it looking its best.
- Turn off the power and let the fixture cool to room temperature first.
- Wipe with a soft cloth dampened with water and wrung dry. Never spray liquid directly onto the fixture.
- Do not use gasoline, alcohol or other corrosive cleaners.

## GOOD TO KNOW

- Use the fixture only as designed. Damage caused by modification, third-party parts or natural disasters is not covered.
- Warranty terms are listed at yiosilamp.com.

### NEED HELP?

support@yiosilamp.com

+1 970-896-9411

Missing parts, installation questions or anything else, we are here to help. Please include your order number and a photo of the issue so we can resolve it quickly.