
YIOSI

INSTALLATION GUIDE

7.9" 3-Light Glass Raindrop Chandelier

CHANDELIER · CEILING MOUNT

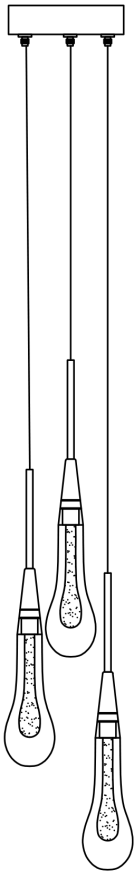

Model **YIOSI-0759**

Please read this guide completely before you begin, and keep it for future reference.

BEFORE YOU BEGIN

⚠ **WARNING**

- **Turn off the power at the circuit breaker** before installing, changing bulbs or cleaning the fixture.
- Installation by a **qualified electrician** is recommended. Install in accordance with local electrical codes.
- This fixture uses 3 G4 LED light sources, 2 W each. Do not exceed the rated wattage.
- Do not clean the fixture with corrosive substances such as gasoline or alcohol-based disinfectants.
- Use this fixture only for its intended purpose. Do not modify or rewire it.
- Keep small parts and packaging away from children. They can cause serious injury.


PREPARATION

- Read every step carefully and follow them in order.
- Unpack and check all parts against the parts list. If anything is missing or damaged, contact us before installing (see the last page). We will send replacement parts promptly.
- Assemble the fixture where it will be installed. Moving it mid-assembly risks losing small parts.

SPECIFICATIONS

LIGHT SOURCE	COLOR TEMPERATURE	MOUNTING
3 × G4 LED, 2 W each	**2700K**	**Ceiling, adjustable cables**

IN THE BOX

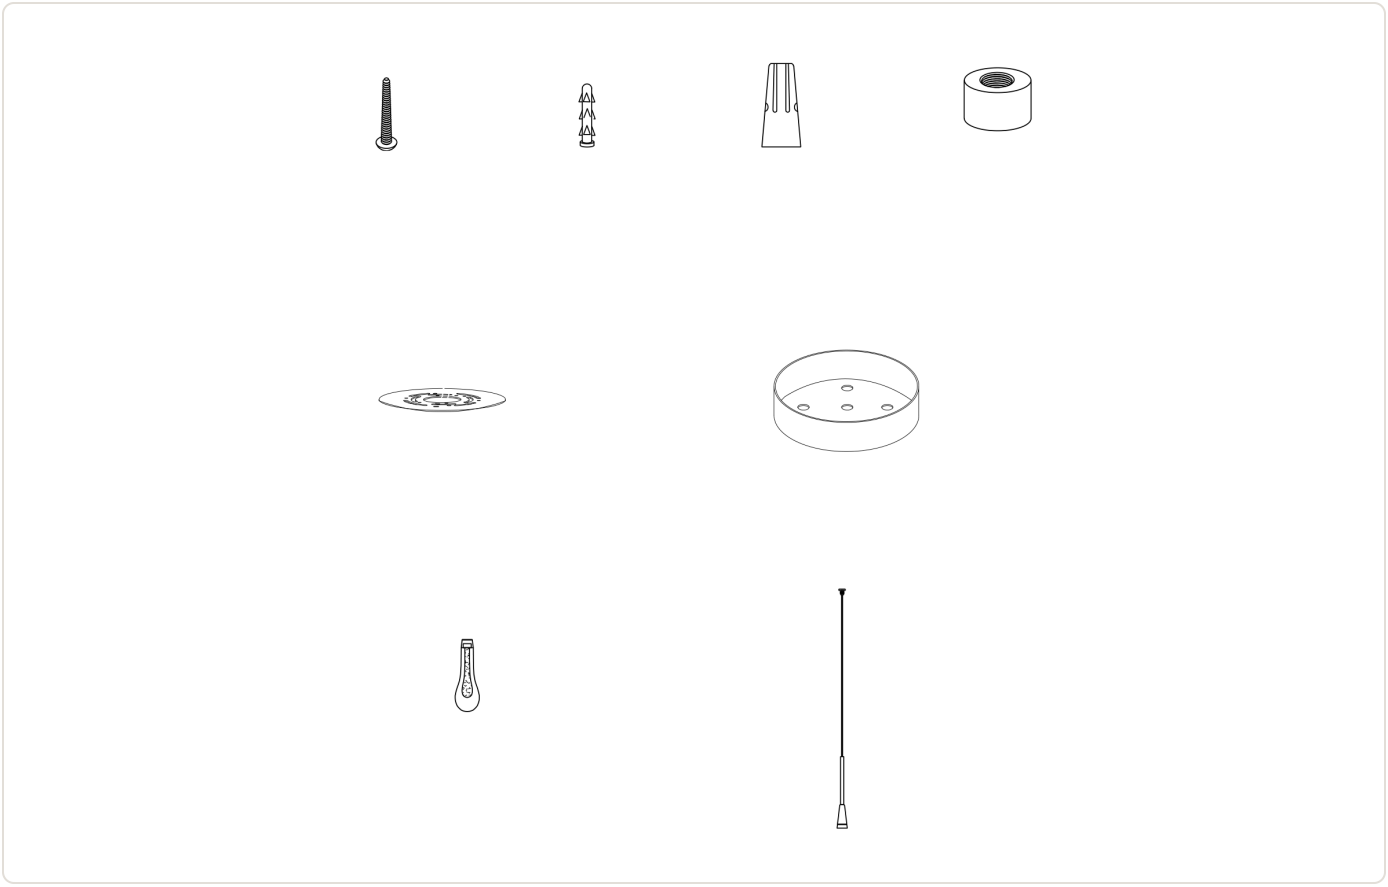


PART	QTY	DESCRIPTION
—	× 4	Mounting screw
—	× 4	Wall anchor
—	× 4	Wire connector (2 + 2)
—	× 1	Center nut
—	× 1	Mounting plate
a	× 1	Lamp plate (canopy)
b	× 3	Suspended lamp holder
c	× 3	Glass raindrop

INSTALLATION

STEP 1

Prepare the lamp plate


Unpack the accessory kit and have 3 G4 LED light sources ready. Remove the center nut and take the mounting plate off the lamp plate (a). Untie the cord that binds the wires so the height can be adjusted later.

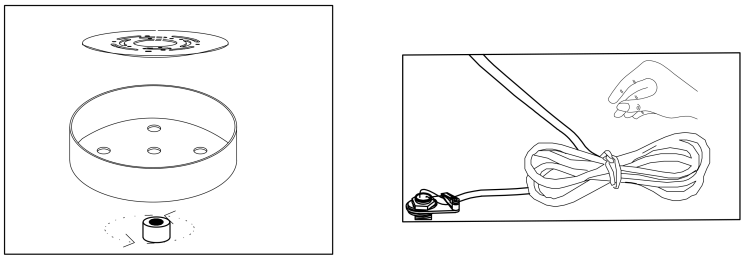

STEP 2

Mount the plate


Turn off the power at the circuit breaker. Fix the mounting plate to the ceiling with the wall anchors and mounting screws.

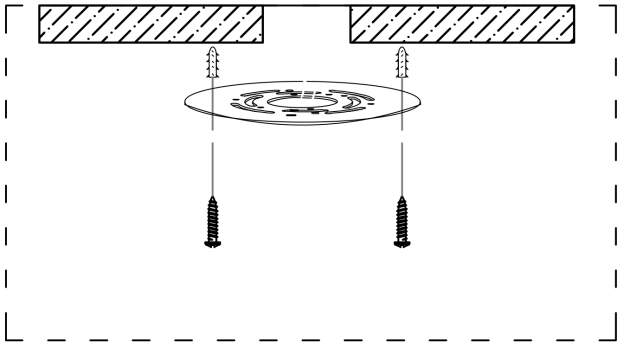

STEP 3

Connect the wires


Join the fixture wires to the matching house supply wires with the wire connectors: live to live, neutral to neutral, ground to ground. Fit the lamp plate (a) over the mounting plate and secure it with the center nut.

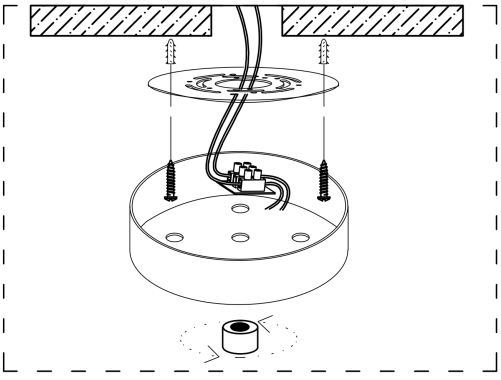

STEP 4

Adjust the height


Loosen the cable grip on each drop, press it gently and pull the wire to set the height you want. Stagger the three drops as shown.

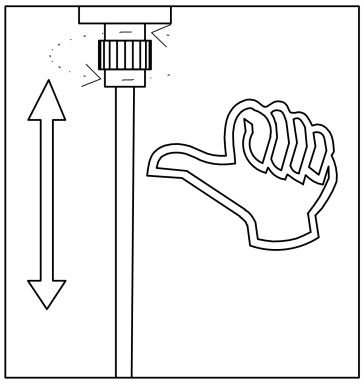

STEP 5

Fit the light sources and glass

Plug a G4 LED into each lamp holder (b), then slide a glass raindrop (c) over each one. Restore power and switch on to test.

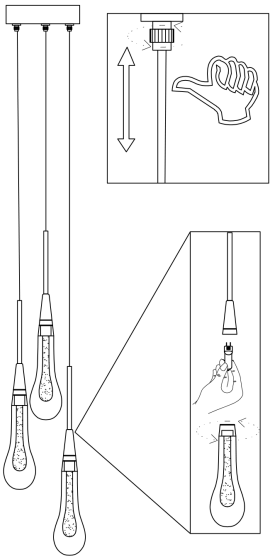

CARE & SUPPORT

CLEANING & CARE

- Clean the fixture about once a month to keep it looking its best.
- Turn off the power and let the fixture cool to room temperature first.
- Wipe with a soft cloth dampened with water and wrung dry. Never spray liquid directly onto the fixture.
- Do not use gasoline, alcohol or other corrosive cleaners.

GOOD TO KNOW

- Use the fixture only as designed. Damage caused by modification, third-party parts or natural disasters is not covered.
- Warranty terms are listed at yiosilamp.com.
- The fixture ships in three layers: glass raindrops, lamp body, lamp plate.

NEED HELP?

support@yiosilamp.com

+1 970-896-9411

Missing parts, installation questions or anything else, we are here to help. Please include your order number and a photo of the issue so we can resolve it quickly.