
YIOSI

INSTALLATION GUIDE

D800 Light Cube Crystal Round Pendant

PENDANT · CEILING MOUNT

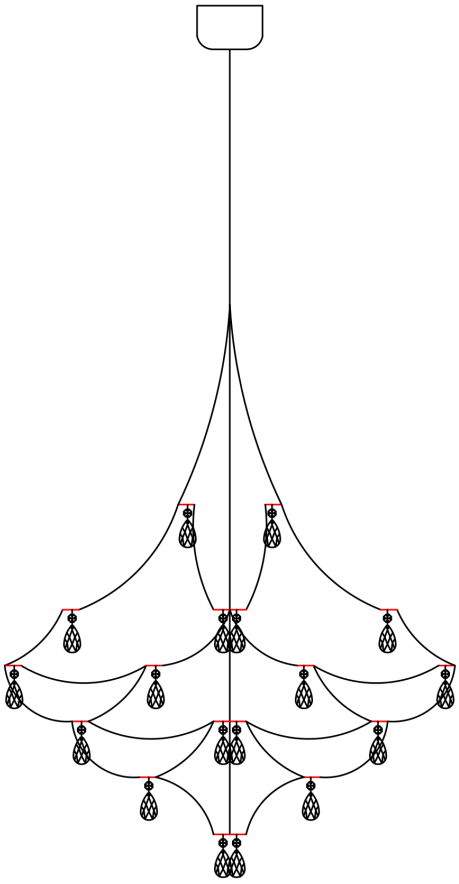

Model **YIOSI-0764**

Please read this guide completely before you begin, and keep it for future reference.

BEFORE YOU BEGIN

⚠ **WARNING**

- **Turn off the power at the circuit breaker** before installing, changing bulbs or cleaning the fixture.
- Installation by a **qualified electrician** is recommended. Install in accordance with local electrical codes.
- Integrated LED beads (63 × 0.5 W). No bulbs to replace; a faulty bead can be replaced with a spare (see the last step).
- Do not clean the fixture with corrosive substances such as gasoline or alcohol-based disinfectants.
- Use this fixture only for its intended purpose. Do not modify or rewire it.
- Keep small parts and packaging away from children. They can cause serious injury.


PREPARATION

- Read every step carefully and follow them in order.
- Unpack and check all parts against the parts list. If anything is missing or damaged, contact us before installing (see the last page). We will send replacement parts promptly.
- Assemble the fixture where it will be installed. Moving it mid-assembly risks losing small parts.

SPECIFICATIONS

LIGHT SOURCE	COLOR TEMPERATURE	MOUNTING
Integrated LED, 63 × 0.5 W	**3000K**	**Ceiling, adjustable cables**

IN THE BOX

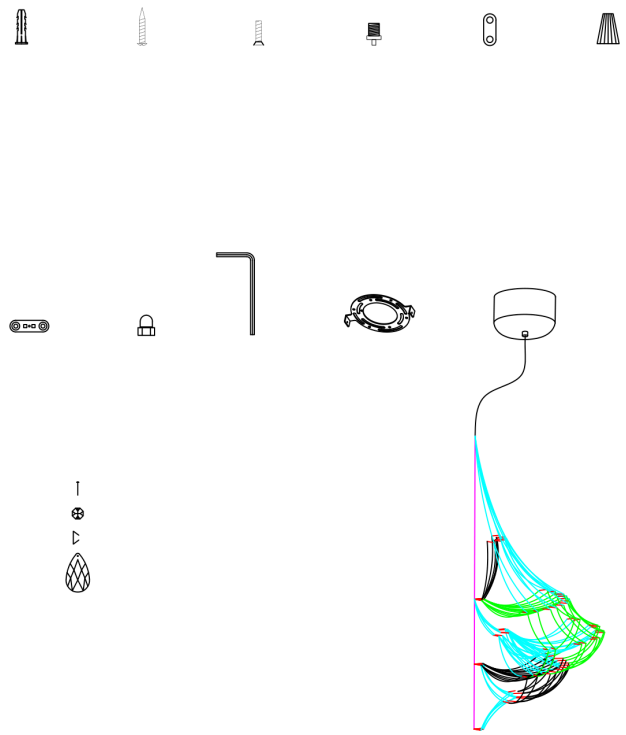


PART	QTY	DESCRIPTION
—	× 1 set	Hardware: 4 wall anchors, 4 mounting screws, 7 small screws, 6 cap nuts, 3 wire connectors, threaded fitting, link plate, hex key
—	× 5	Spare LED bead
—	× 1	Mounting plate
—	× 1	Folding frame with canopy and cables
—	× 66	Crystal with pin (63 + 3 spare)

INSTALLATION

STEP 1

Unfold the frame


Take the folded frame out of the box, open it out, and shape it into a full circle as shown.

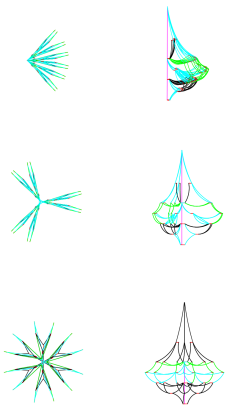

STEP 2

Mount the plate and wire


Turn off the power at the circuit breaker. (1) Fix the mounting plate to the ceiling with the wall anchors and mounting screws. (2) Join the fixture wires to the matching house supply wires with the wire connectors: live to live, neutral to neutral, ground to ground. (3) Lift the canopy onto the plate and lock it with its threaded fitting.

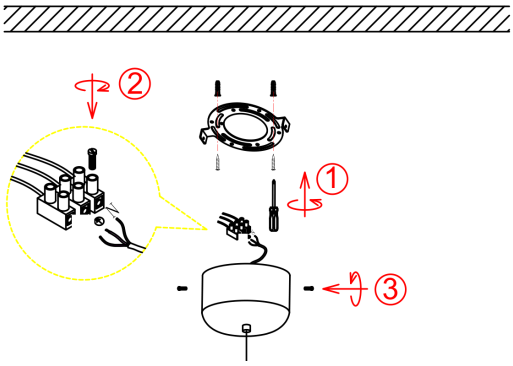

STEP 3

Adjust the height


Adjust the length of the hanging cables to set the height you want, keeping the fixture level.

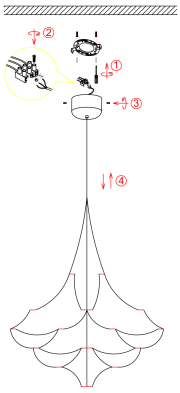

STEP 4

Hang the crystals


Push the pin of each crystal through the small hole in an LED bead, then spread the two legs of the pin apart by hand so the crystal cannot slip off. Restore power and switch on to test.

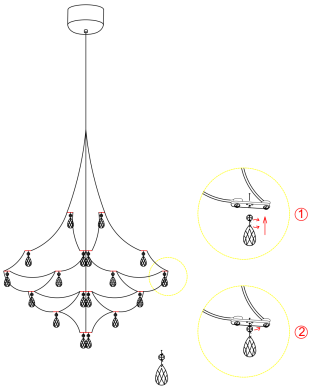

STEP 5

Replacing an LED bead

If a bead fails: turn off the power, remove its crystal by hand, unscrew the screws on both sides of the bead with the hex key, fit a spare bead, tighten the screws and rehang the crystal.

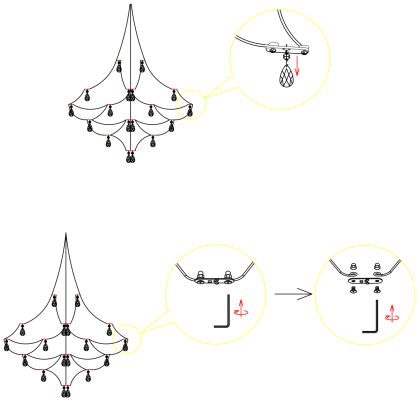

CARE & SUPPORT

CLEANING & CARE

- Clean the fixture about once a month to keep it looking its best.
- Turn off the power and let the fixture cool to room temperature first.
- Wipe with a soft cloth dampened with water and wrung dry. Never spray liquid directly onto the fixture.
- Do not use gasoline, alcohol or other corrosive cleaners.

GOOD TO KNOW

- Use the fixture only as designed. Damage caused by modification, third-party parts or natural disasters is not covered.
- Warranty terms are listed at yiosilamp.com.

NEED HELP?

support@yiosilamp.com

+1 970-896-9411

Missing parts, installation questions or anything else, we are here to help. Please include your order number and a photo of the issue so we can resolve it quickly.