
YIOSI

INSTALLATION GUIDE

54" 2-Tier Alabaster Linear Chandelier

LINEAR CHANDELIER · CEILING MOUNT

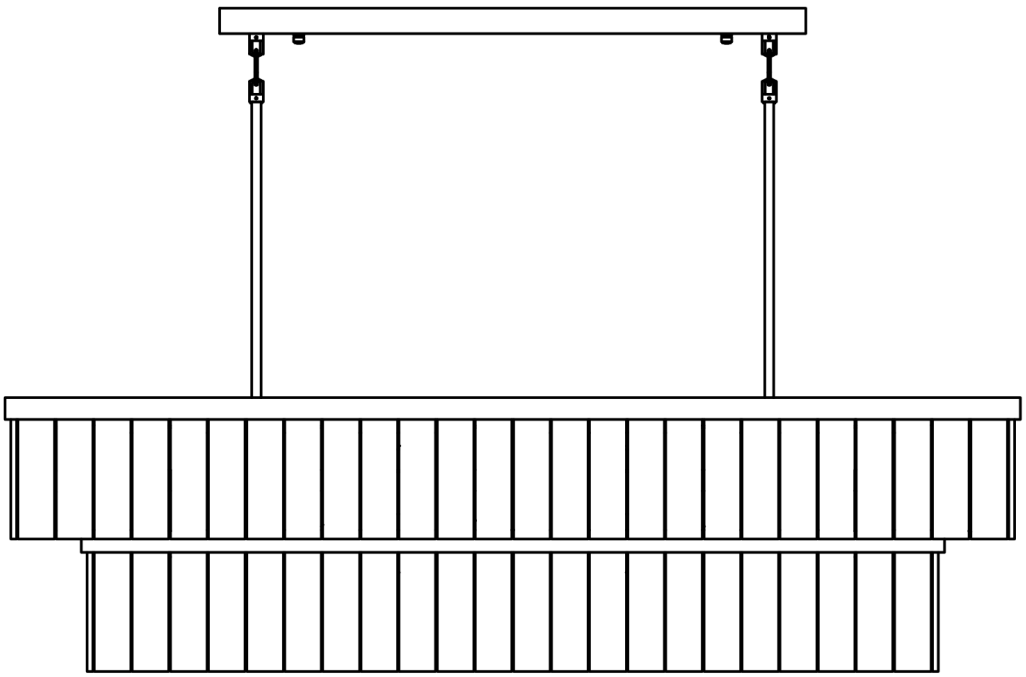

Model **YIOSI-0789** · **YIOSI-0790**

Please read this guide completely before you begin, and keep it for future reference.

BEFORE YOU BEGIN

⚠ **WARNING**

- **Turn off the power at the circuit breaker** before installing, changing bulbs or cleaning the fixture.
- Installation by a **qualified electrician** is recommended. Install in accordance with local electrical codes.
- This fixture requires 16 E12 bulbs, max. 40 W each (bulbs not included). Do not exceed the rated wattage.
- Do not clean the fixture with corrosive substances such as gasoline or alcohol-based disinfectants.
- Use this fixture only for its intended purpose. Do not modify or rewire it.
- Keep small parts and packaging away from children. They can cause serious injury.


PREPARATION

- Read every step carefully and follow them in order.
- Unpack and check all parts against the parts list. If anything is missing or damaged, contact us before installing (see the last page). We will send replacement parts promptly.
- Assemble the fixture where it will be installed. Moving it mid-assembly risks losing small parts.

SPECIFICATIONS

LIGHT SOURCE	MAX. WATTAGE	MOUNTING
16 × E12 bulbs (not included)	**40 W per bulb**	**Ceiling, adjustable rods**

IN THE BOX

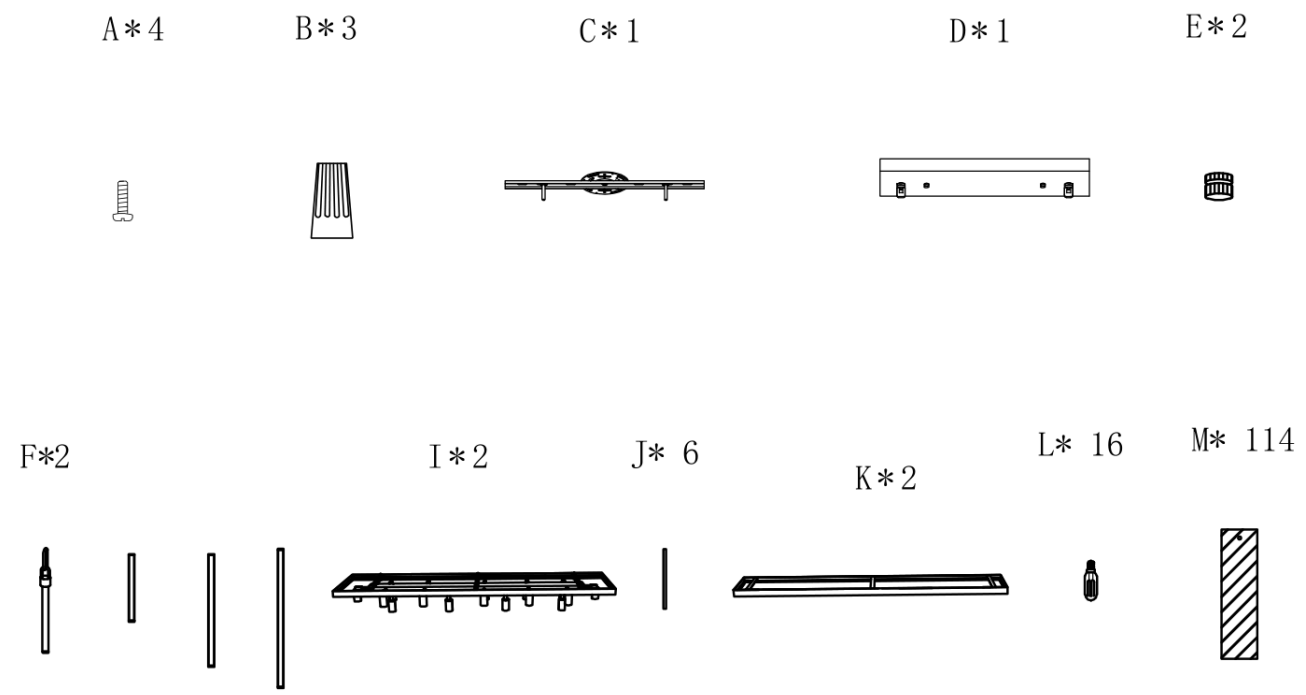


PART	QTY	DESCRIPTION
A, B	× 4/3	Screws (A), wire connectors (B)
C	× 1	Mounting plate
D	× 1	Canopy
E	× 2	Cap nut
F–H	× 2/4/4	Hanging rod with loop (F), extension rods (G, H)
I	× 2	Lamp body frame (upper tier)
J	× 6	Connecting rod
K	× 2	Lower frame
L	× 16	E12 bulb (shown for reference, not included)
M	× 114	Alabaster piece

INSTALLATION

STEP 1

Install the mounting plate


Turn off the power at the circuit breaker. Take the mounting plate (C) out of the canopy and fix it to the ceiling junction box with the screws (A).

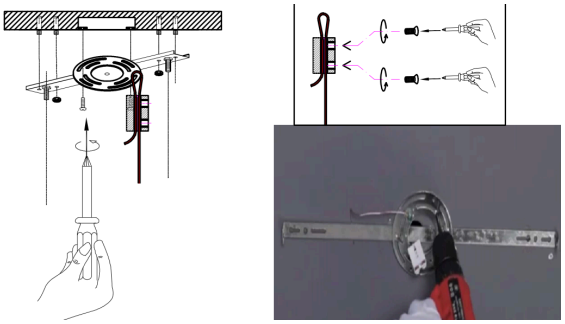

STEP 2

Connect the wires and fit the canopy


Join the fixture wires to the matching house supply wires with the wire connectors (B): live to live, neutral to neutral, ground to ground. Fix the canopy (D) to the mounting plate and tighten it with the cap nuts (E).

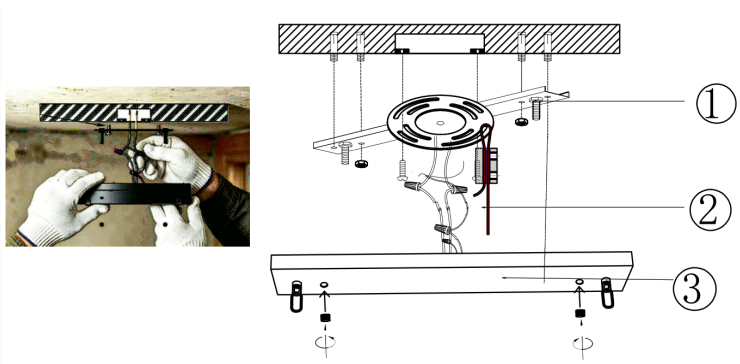

STEP 3

Assemble the lamp body


Join the rods (F, G, H) on each side to set the hanging height and hang the lamp body (I) from them. Fix the lower frame (K) under the lamp body with the connecting rods (J) and nuts.

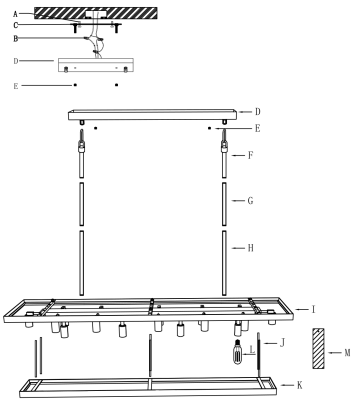

STEP 4

Fit the bulbs


Tighten the frame screws, then screw the E12 bulbs into the lamp holders. Restore power briefly to check that every bulb lights, then turn the power off again.

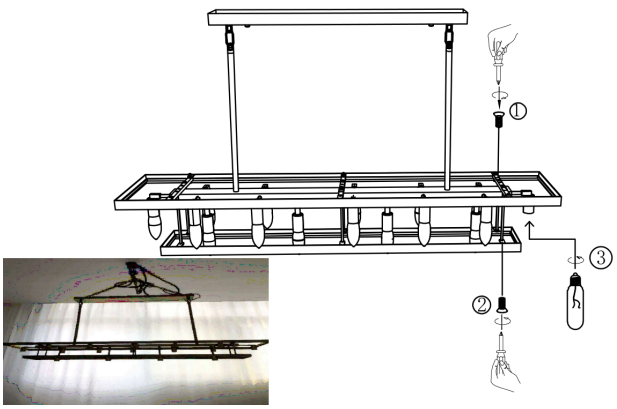

STEP 5

Fit the alabaster

The fixing screws are already on the frame: remove each one, pass it through an alabaster piece (M) and screw it back in, on both tiers. Restore power and switch on.

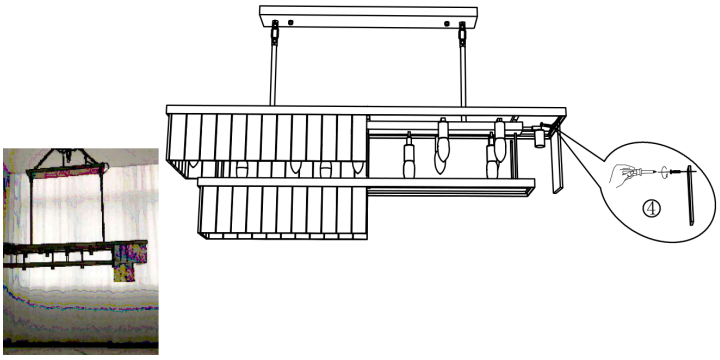

CARE & SUPPORT

CLEANING & CARE

- Clean the fixture about once a month to keep it looking its best.
- Turn off the power and let the fixture cool to room temperature first.
- Wipe with a soft cloth dampened with water and wrung dry. Never spray liquid directly onto the fixture.
- Do not use gasoline, alcohol or other corrosive cleaners.

GOOD TO KNOW

- Use the fixture only as designed. Damage caused by modification, third-party parts or natural disasters is not covered.
- Warranty terms are listed at yiosilamp.com.
- Natural alabaster varies piece to piece. Veining and tone differences are part of its character.

NEED HELP?

support@yiosilamp.com

+1 970-896-9411

Missing parts, installation questions or anything else, we are here to help. Please include your order number and a photo of the issue so we can resolve it quickly.