
YIOSI

INSTALLATION GUIDE

Marquise Branch Semicircle Round Pendant 1000

CHANDELIER · CEILING MOUNT

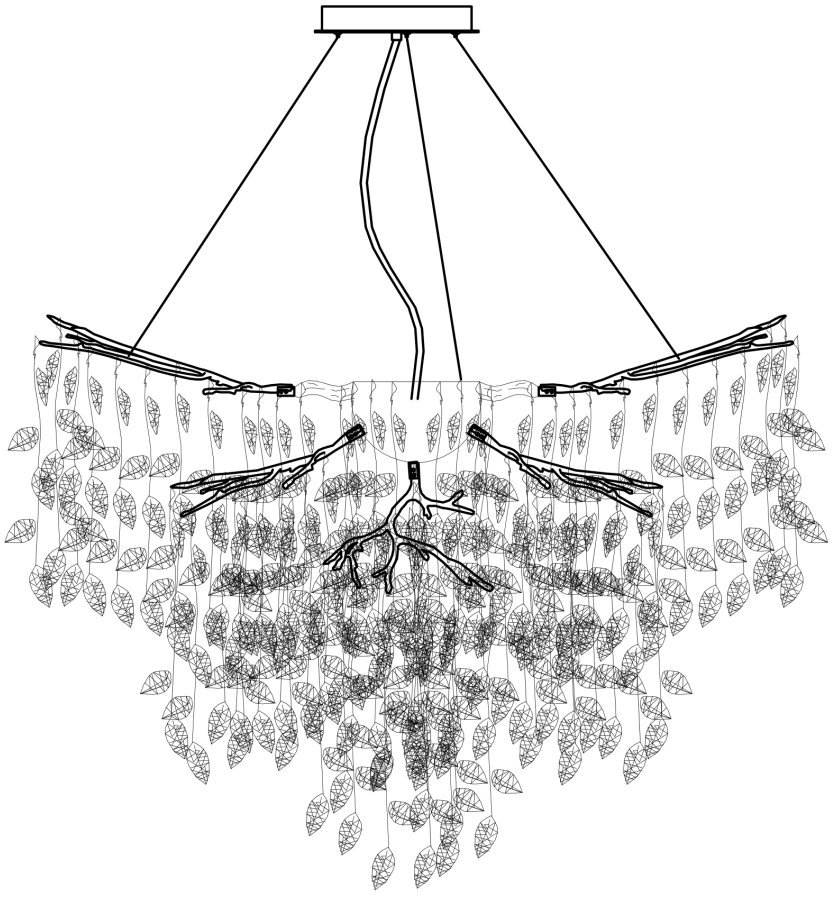

Model **YIOSI-0812**

Please read this guide completely before you begin, and keep it for future reference.

BEFORE YOU BEGIN

⚠ **WARNING**

- **Turn off the power at the circuit breaker** before installing, changing bulbs or cleaning the fixture.
- Installation by a **qualified electrician** is recommended. Install in accordance with local electrical codes.
- This fixture requires 12 G9 bulbs, max. 25 W each (bulbs not included). Do not exceed the rated wattage.
- Do not clean the fixture with corrosive substances such as gasoline or alcohol-based disinfectants.
- Use this fixture only for its intended purpose. Do not modify or rewire it.
- Keep small parts and packaging away from children. They can cause serious injury.


PREPARATION

- Read every step carefully and follow them in order.
- Unpack and check all parts against the parts list. If anything is missing or damaged, contact us before installing (see the last page). We will send replacement parts promptly.
- Assemble the fixture where it will be installed. Moving it mid-assembly risks losing small parts.

SPECIFICATIONS

LIGHT SOURCE	MAX. WATTAGE	MOUNTING
12 × G9 bulbs (not included)	**25 W per bulb**	**Ceiling, adjustable cables**

IN THE BOX

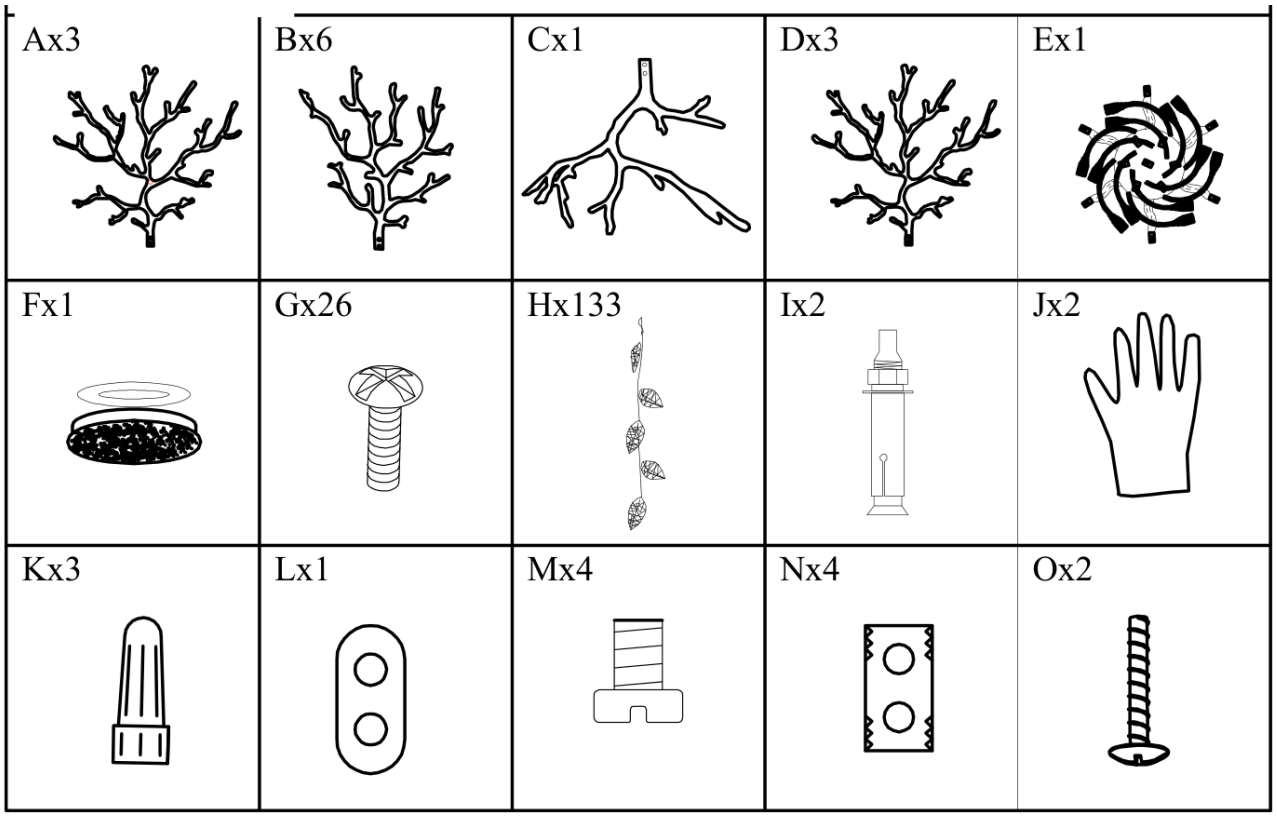


PART	QTY	DESCRIPTION
A, B	× 3/6	Branch arms, large (A) and small (B)
C, D	× 1/3	Center branch (C), branch arms (D)
E	× 1	Lamp body
F	× 1	Decorative cover
G, M	× 26/4	Screws
H	× 133	Leaf string
I, O	× 2/2	Expansion bolts (I), mounting screws (O)
J, K	× 2/3	Gloves (J), wire connectors (K)
L, N	× 1/4	Connecting plates

INSTALLATION

STEP 1

Mount the crossbar


Turn off the power at the circuit breaker. Take the lamp body out and check that it is firmly assembled. Remove the crossbar from the mounting base and fix it to the ceiling junction box with the screws.

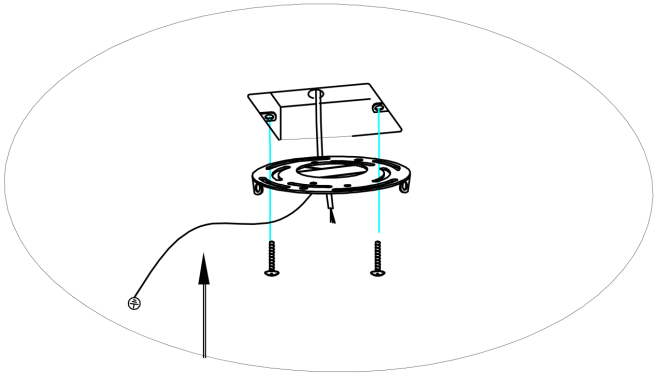

STEP 2

Connect the wires


Lift the lamp body up to the bracket. Join the fixture wires to the matching house supply wires with the wire connectors (K): live to live, neutral to neutral, ground to ground. Tuck the connections into the junction box.

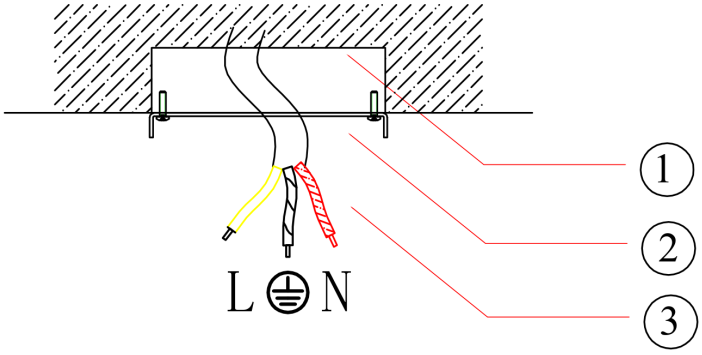

STEP 3

Secure the canopy and set the height


Align the canopy with the screw holes and tighten it with the screws. To adjust the height, press and hold the button on the cable gripper and slide the cable up or down. Release it to lock.

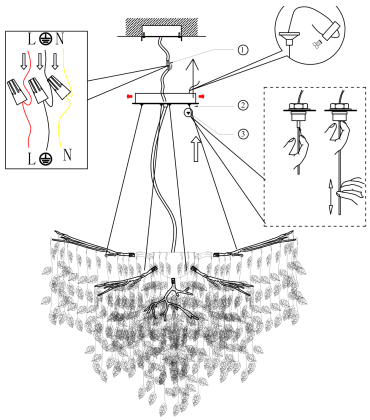

STEP 4

Shape the branches


Swing the arms and lamp holders to the position you like, then hold each branch with your hands and spread it out evenly. Wear the gloves (J) to keep the finish clean.

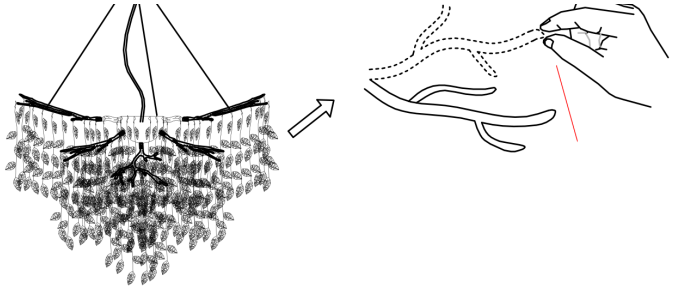

STEP 5

Hang the leaves and fit the bulbs

Hook each leaf string (H) into its hole on the branches until the shape looks even. Install the 12 G9 bulbs, then restore power and switch on to test.

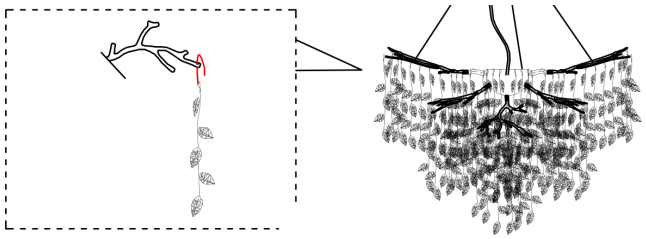

CARE & SUPPORT

CLEANING & CARE

- Clean the fixture about once a month to keep it looking its best.
- Turn off the power and let the fixture cool to room temperature first.
- Wipe with a soft cloth dampened with water and wrung dry. Never spray liquid directly onto the fixture.
- Do not use gasoline, alcohol or other corrosive cleaners.

GOOD TO KNOW

- Use the fixture only as designed. Damage caused by modification, third-party parts or natural disasters is not covered.
- Warranty terms are listed at yiosilamp.com.

NEED HELP?

support@yiosilamp.com

+1 970-896-9411

Missing parts, installation questions or anything else, we are here to help. Please include your order number and a photo of the issue so we can resolve it quickly.