
YIOSI

INSTALLATION GUIDE

Alabaster Square Vanity Light

VANITY LIGHT · WALL MOUNT

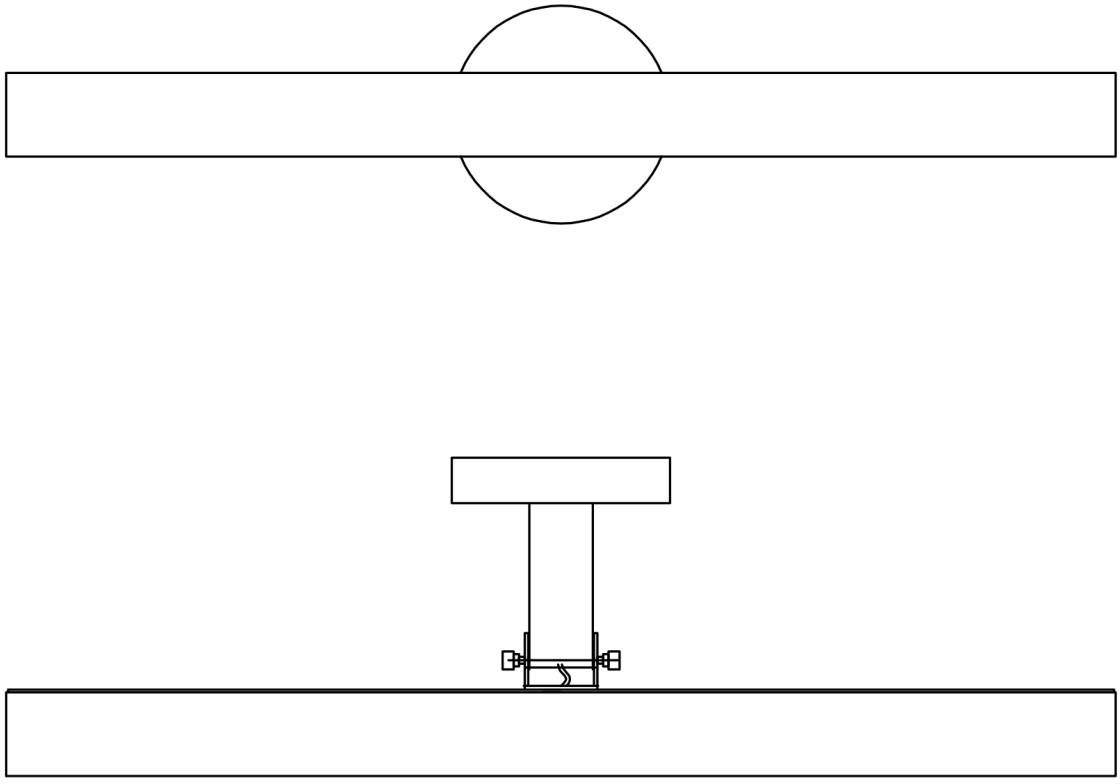

Model **YIOSI-0837** · **YIOSI-0838** · **YIOSI-0839** · **YIOSI-0840**

Please read this guide completely before you begin, and keep it for future reference.

BEFORE YOU BEGIN

⚠ **WARNING**

- **Turn off the power at the circuit breaker** before installing, changing bulbs or cleaning the fixture.
- Installation by a **qualified electrician** is recommended. Install in accordance with local electrical codes.
- LED light source, 8 W, 3000K. Do not modify the light source.
- Do not clean the fixture with corrosive substances such as gasoline or alcohol-based disinfectants.
- Use this fixture only for its intended purpose. Do not modify or rewire it.
- Keep small parts and packaging away from children. They can cause serious injury.


PREPARATION

- Read every step carefully and follow them in order.
- Unpack and check all parts against the parts list. If anything is missing or damaged, contact us before installing (see the last page). We will send replacement parts promptly.
- Assemble the fixture where it will be installed. Moving it mid-assembly risks losing small parts.
- This guide shows one size. Other sizes in the same series install the same way.

SPECIFICATIONS


LIGHT SOURCE	COLOR TEMPERATURE	MOUNTING
LED, 8 W	**3000K**	**Wall, over a junction box**

IN THE BOX

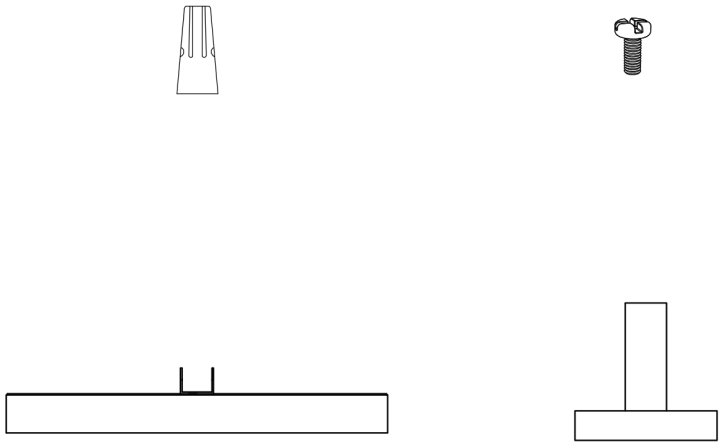

PART	QTY	DESCRIPTION
A	× 1	Alabaster shade (light body)
B	× 1	Wall mount
—	× 3+2	Wire connector (incl. spares)
—	× 2	Spare screw

PACKAGING

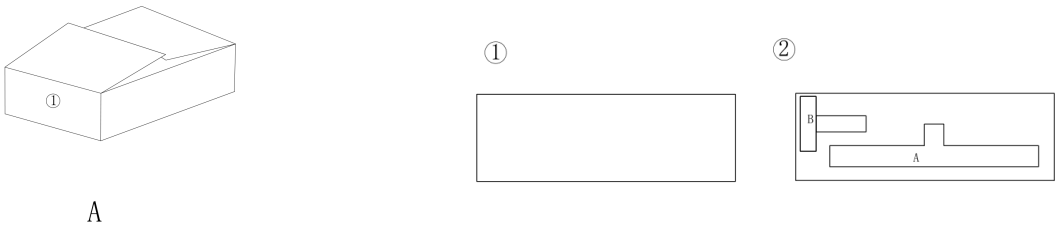


The fixture ships in two layers: (1) foam cover; (2) alabaster shade and wall mount.

INSTALLATION

STEP 1

Attach the shade to the mount


Fix the wall mount (B) to the alabaster shade (A) with the screws, by hand. Make sure the screws are tight.

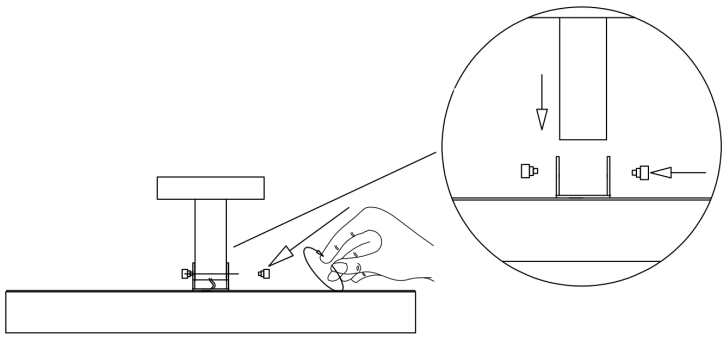

STEP 2

Fix the mounting plate


Turn off the power at the circuit breaker. Remove the mounting plate from the wall mount and fix it to the wall junction box with the screws.

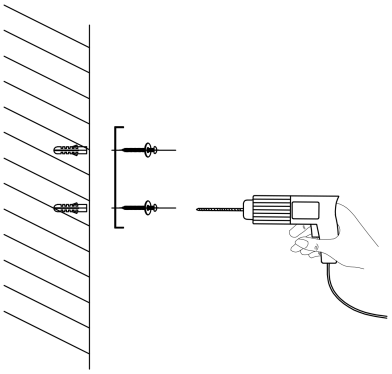

STEP 3

Connect the wires


Hold the fixture up to the plate. Join the fixture wires to the matching house supply wires with the wire connectors (supplied): live to live, neutral to neutral, ground to ground. Tuck the connections into the junction box.

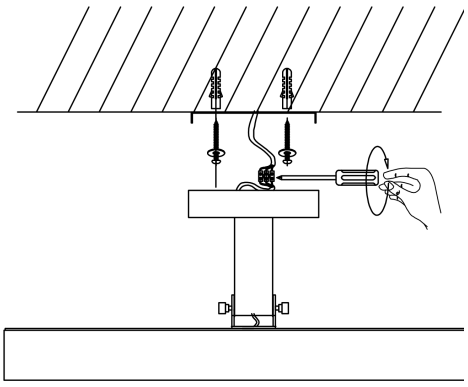

STEP 4

Secure and adjust

Fasten the fixture to the mounting plate with the screws, then adjust the lighting angle. Restore power and switch on to test.

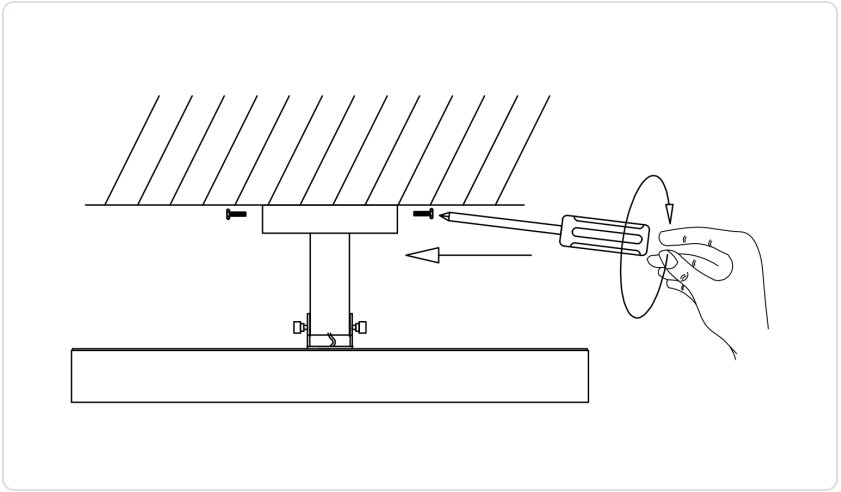

CARE & SUPPORT

CLEANING & CARE

- Clean the fixture about once a month to keep it looking its best.
- Turn off the power and let the fixture cool to room temperature first.
- Wipe with a soft cloth dampened with water and wrung dry. Never spray liquid directly onto the fixture.
- Do not use gasoline, alcohol or other corrosive cleaners.

GOOD TO KNOW

- Use the fixture only as designed. Damage caused by modification, third-party parts or natural disasters is not covered.
- Warranty terms are listed at yiosilamp.com.
- Natural alabaster varies piece to piece. Veining and tone differences are part of its character.

NEED HELP?

support@yiosilamp.com

+1 970-896-9411

Missing parts, installation questions or anything else, we are here to help. Please include your order number and a photo of the issue so we can resolve it quickly.