
YIOSI

INSTALLATION GUIDE

Vintage Cylinder Vanity Light

VANITY LIGHT · WALL MOUNT

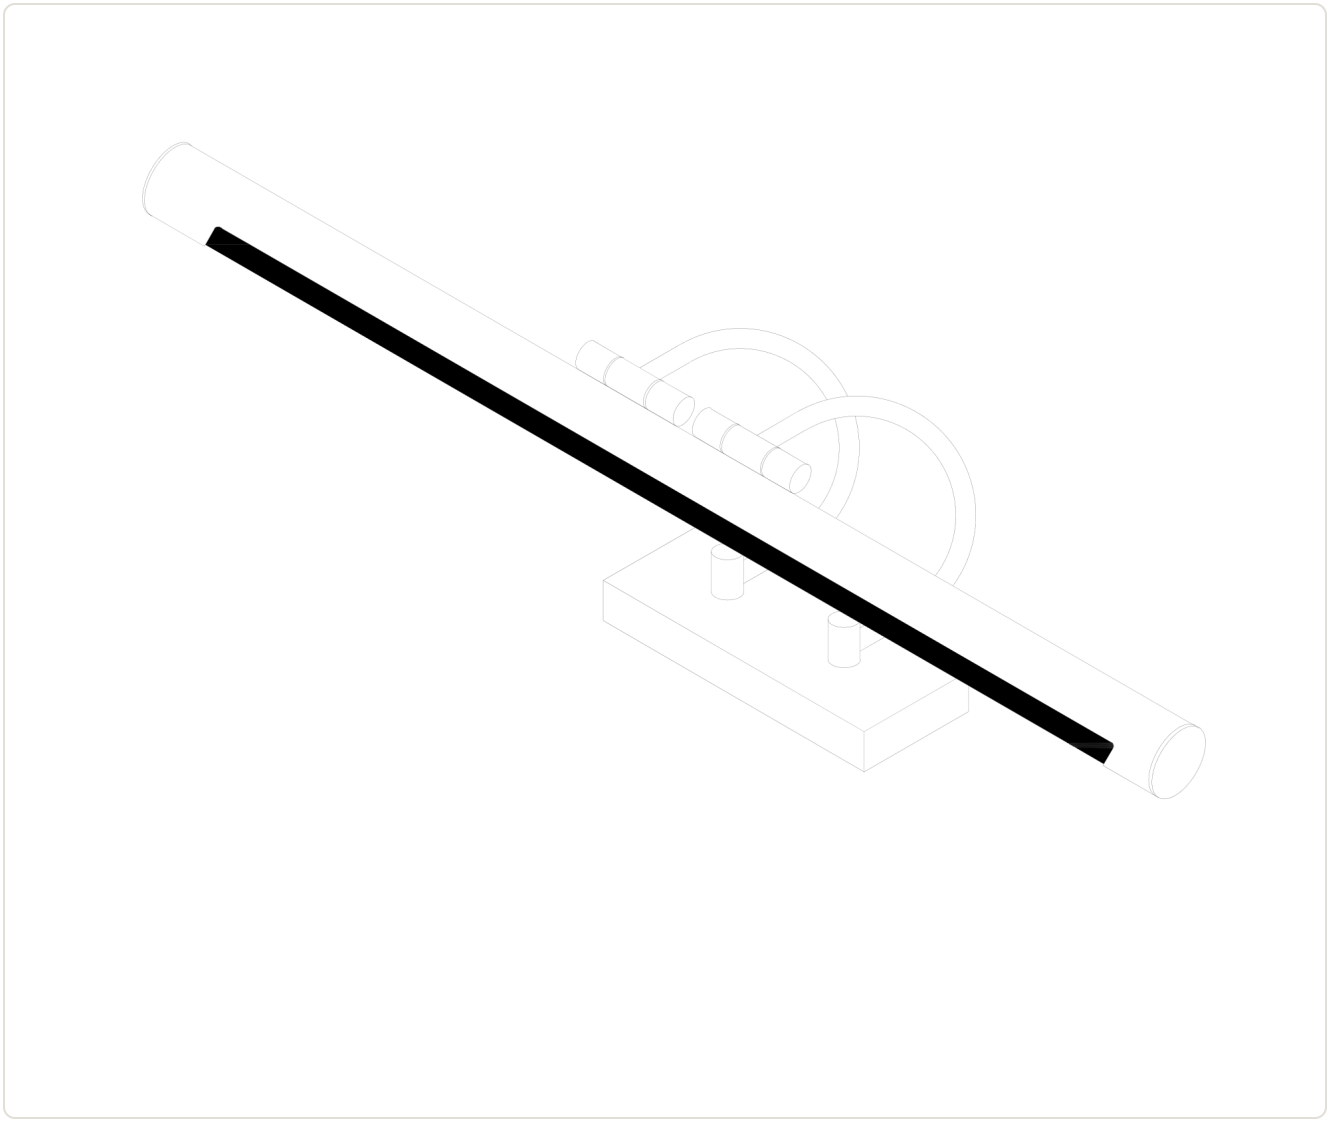

Model **YIOSI-0846** · **YIOSI-0847** · **YIOSI-0848** · **YIOSI-0849**

Please read this guide completely before you begin, and keep it for future reference.

BEFORE YOU BEGIN

⚠ **WARNING**

- **Turn off the power at the circuit breaker** before installing, changing bulbs or cleaning the fixture.
- Installation by a **qualified electrician** is recommended. Install in accordance with local electrical codes.
- Integrated LED strip, 3 W per strip, 3000K. No bulbs to replace.
- Do not clean the fixture with corrosive substances such as gasoline or alcohol-based disinfectants.
- Use this fixture only for its intended purpose. Do not modify or rewire it.
- Keep small parts and packaging away from children. They can cause serious injury.


PREPARATION

- Read every step carefully and follow them in order.
- Unpack and check all parts against the parts list. If anything is missing or damaged, contact us before installing (see the last page). We will send replacement parts promptly.
- Assemble the fixture where it will be installed. Moving it mid-assembly risks losing small parts.
- This guide shows one size. Other sizes in the same series install the same way.

SPECIFICATIONS

LIGHT SOURCE	WATTAGE	COLOR TEMPERATURE
Integrated LED strip	**3 W per strip**	**3000K**

IN THE BOX

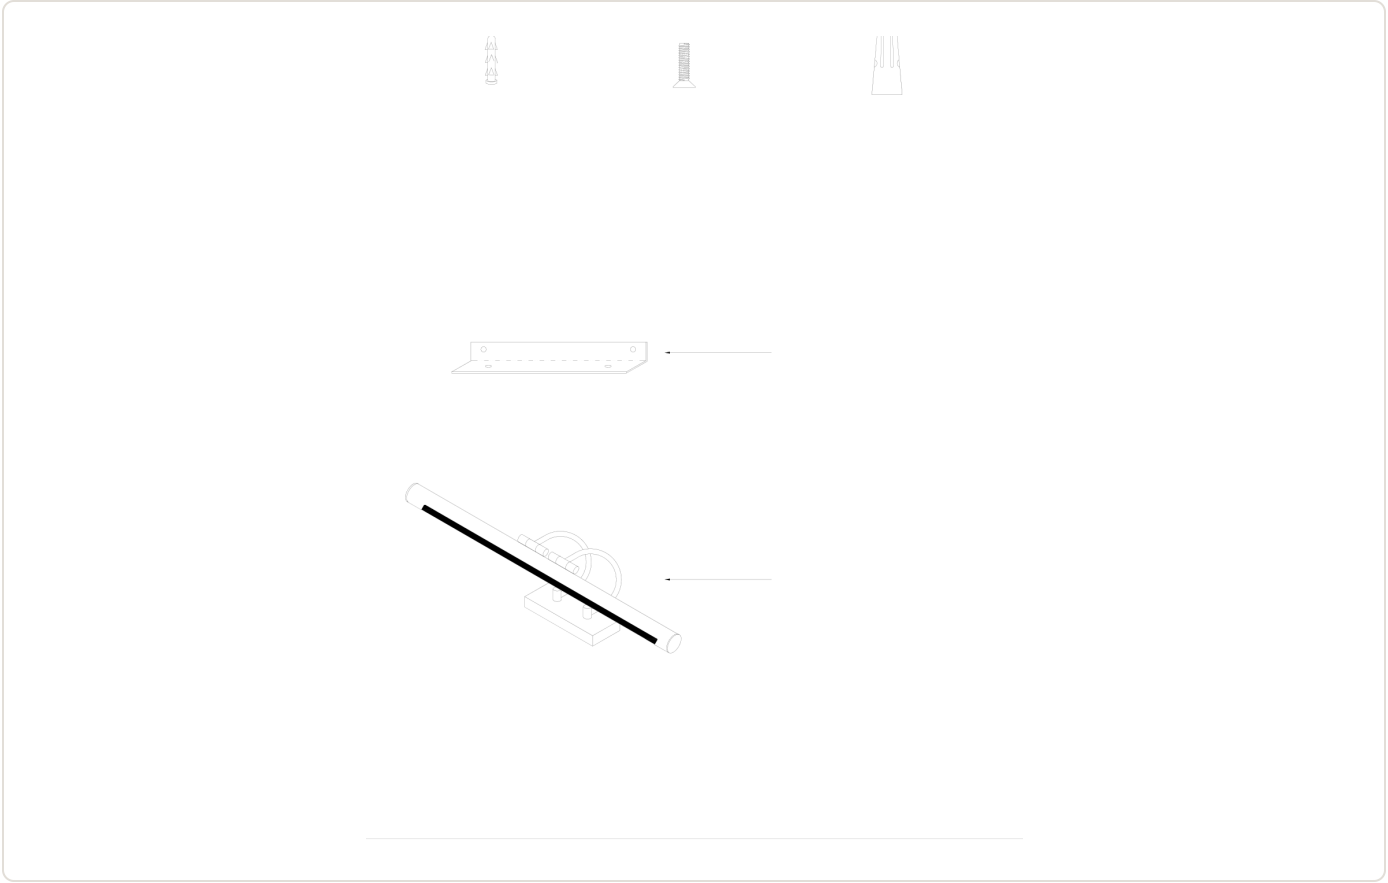


PART	QTY	DESCRIPTION
A	× 1	Mounting plate
B	× 1	Light fixture
—	× 4	Wall anchor
—	× 4	Screw
—	× 3	Wire connector

INSTALLATION

STEP 1

Mount the plate


Turn off the power at the circuit breaker. Take the mounting plate (A) and fix it to the wall outlet box with two screws. Use the wall anchors where there is no box to screw into.

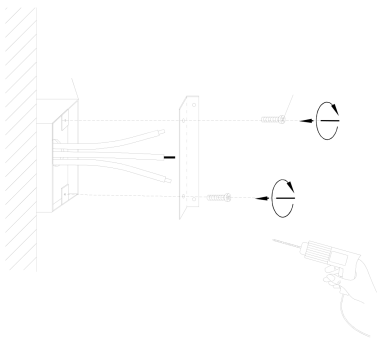

STEP 2

Connect and attach the fixture


Join the fixture wires to the matching house supply wires with the wire connectors: live to live, neutral to neutral, ground to ground. Tuck the connections into the outlet box, then place the fixture (B) over the mounting plate and fasten it with the screws.



STEP 3

Adjust and test

Turn the light bar to the angle you want. Restore power and switch on to test.

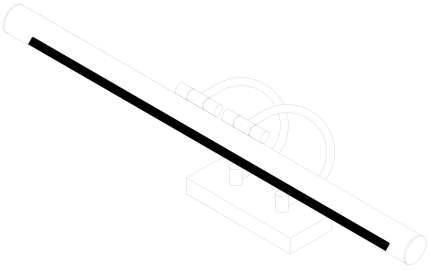

CARE & SUPPORT

CLEANING & CARE

- Clean the fixture about once a month to keep it looking its best.
- Turn off the power and let the fixture cool to room temperature first.
- Wipe with a soft cloth dampened with water and wrung dry. Never spray liquid directly onto the fixture.
- Do not use gasoline, alcohol or other corrosive cleaners.

GOOD TO KNOW

- Use the fixture only as designed. Damage caused by modification, third-party parts or natural disasters is not covered.
- Warranty terms are listed at yiosilamp.com.

NEED HELP?

support@yiosilamp.com

+1 970-896-9411

Missing parts, installation questions or anything else, we are here to help. Please include your order number and a photo of the issue so we can resolve it quickly.