
YIOSI

INSTALLATION GUIDE

# Staggered Alabaster Slice Round Pendant D600

CHANDELIER · CEILING MOUNT

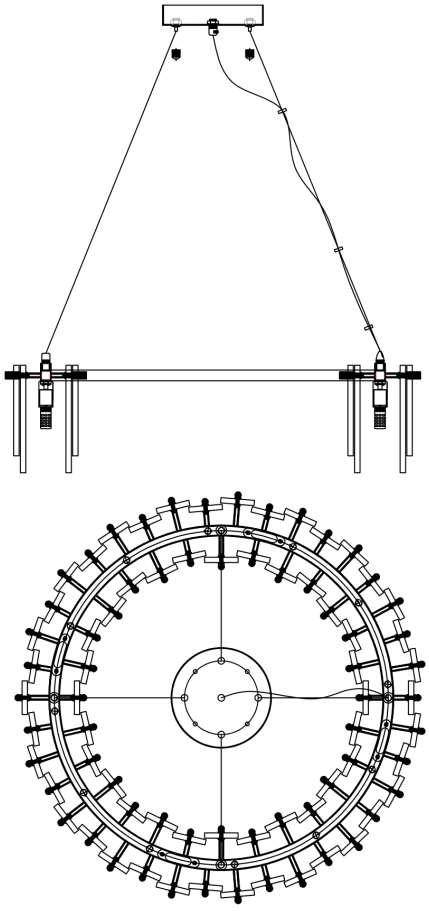

Model **YIOSI-0850**

Please read this guide completely before you begin, and keep it for future reference.

# BEFORE YOU BEGIN

⚠ **WARNING**

- **Turn off the power at the circuit breaker** before installing, changing bulbs or cleaning the fixture.
- Installation by a **qualified electrician** is recommended. Install in accordance with local electrical codes.
- This fixture uses 12 G9 bulbs (5 W, 3000K, included). Replace only with bulbs of the same rating.
- Do not clean the fixture with corrosive substances such as gasoline or alcohol-based disinfectants.
- Use this fixture only for its intended purpose. Do not modify or rewire it.
- Keep small parts and packaging away from children. They can cause serious injury.


## PREPARATION

- Read every step carefully and follow them in order.
- Unpack and check all parts against the parts list. If anything is missing or damaged, contact us before installing (see the last page). We will send replacement parts promptly.
- Assemble the fixture where it will be installed. Moving it mid-assembly risks losing small parts.

## SPECIFICATIONS

| LIGHT SOURCE | WATTAGE | COLOR TEMPERATURE |
|---|---|---|
| **12 × G9 bulbs (included)** | **5 W per bulb** | **3000K** |

# IN THE BOX

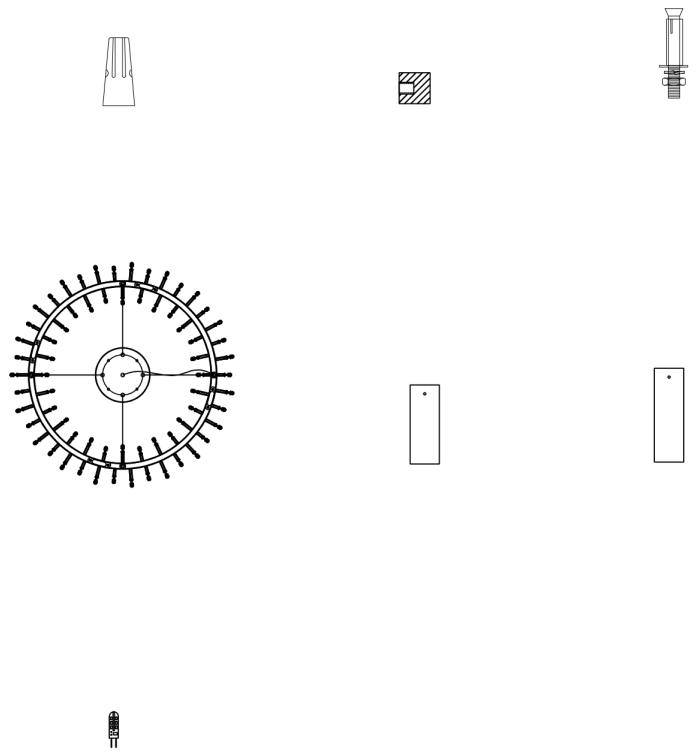


| PART | QTY | DESCRIPTION |
|---|---|---|
| A | × 1 | Lamp body |
| B | × 34 | Short alabaster slice (incl. 1 spare) |
| C | × 34 | Long alabaster slice (incl. 1 spare) |
| D | × 13 | G9 bulb (incl. 1 spare) |
| — | × 5 | Wire connector (incl. 2 spare) |
| — | × 71 | Screw for alabaster slices (incl. 5 spare) |
| — | × 3 | Expansion bolt (incl. 1 spare) |

# INSTALLATION

STEP 1

## Mount the bracket


Turn off the power at the circuit breaker. Remove the mounting bracket from the canopy and fix it to the ceiling with the expansion bolts.

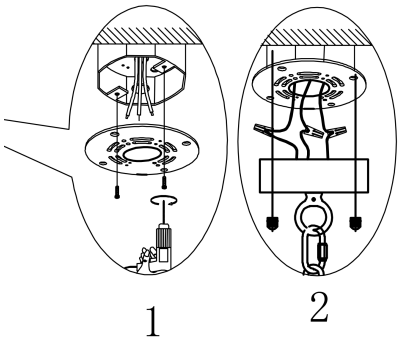


STEP 2

## Hang and connect the fixture


Lift the lamp body to the bracket. Join the fixture wires to the matching house supply wires with the wire connectors: live to live, neutral to neutral, ground to ground. Tuck the connections away, then fasten the canopy with its fixing screws. Adjust the suspension cables so the ring hangs level.

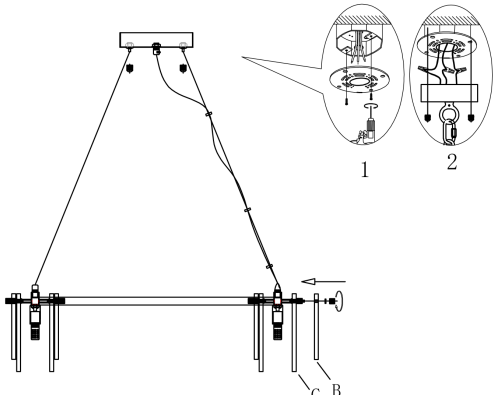


STEP 3

## Fit the bulbs and alabaster

Screw the G9 bulbs (D) into the lamp holders. Screw the alabaster slices onto the ring, alternating short (B) and long (C) slices as shown. Restore power and switch on to test.

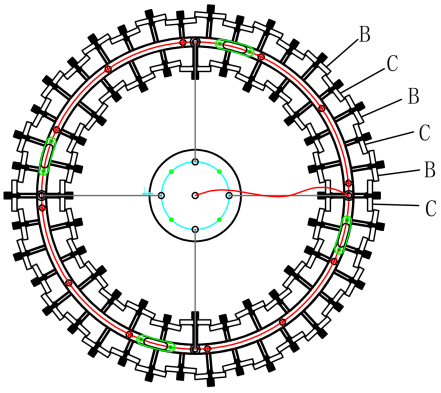

# CARE & SUPPORT

## CLEANING & CARE

- Clean the fixture about once a month to keep it looking its best.
- Turn off the power and let the fixture cool to room temperature first.
- Wipe with a soft cloth dampened with water and wrung dry. Never spray liquid directly onto the fixture.
- Do not use gasoline, alcohol or other corrosive cleaners.

## GOOD TO KNOW

- Use the fixture only as designed. Damage caused by modification, third-party parts or natural disasters is not covered.
- Warranty terms are listed at yiosilamp.com.
- Natural alabaster varies piece to piece. Veining and tone differences are part of its character.

### NEED HELP?

support@yiosilamp.com

+1 970-896-9411

Missing parts, installation questions or anything else, we are here to help. Please include your order number and a photo of the issue so we can resolve it quickly.