
YIOSI

INSTALLATION GUIDE

Alabaster Linear Dining Pendant

LINEAR PENDANT · CEILING MOUNT

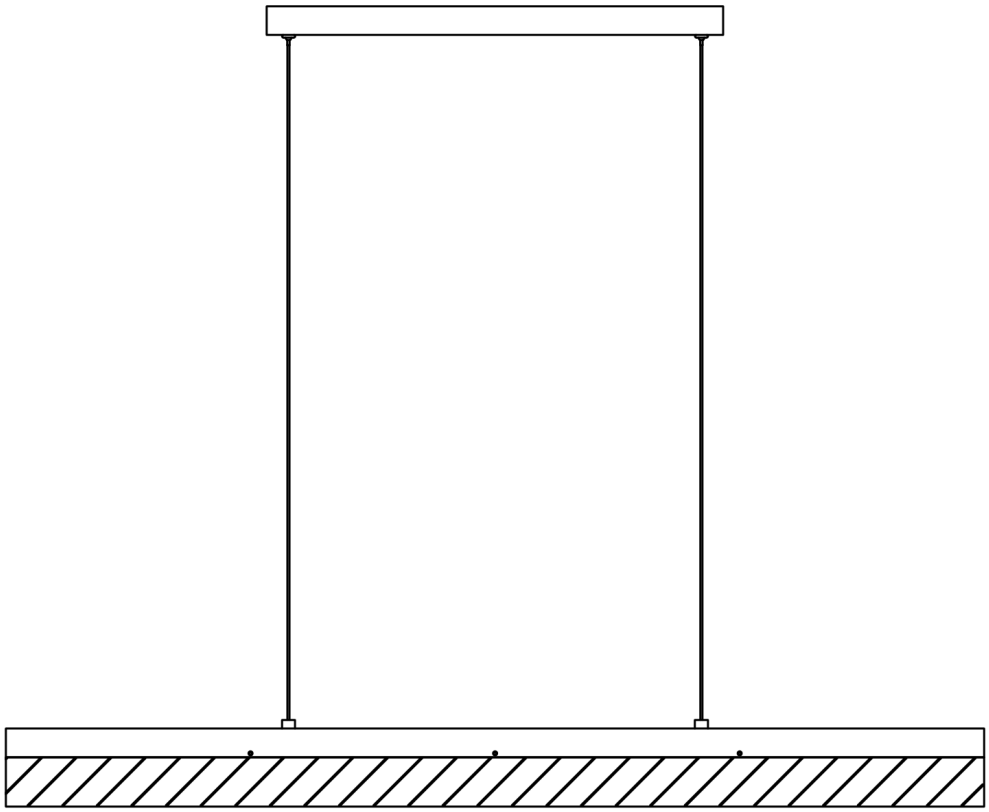

Model **YIOSI-0854** · **YIOSI-0855** · **YIOSI-0856** · **YIOSI-0857** · **YIOSI-0858** · **YIOSI-0859**

Please read this guide completely before you begin, and keep it for future reference.

BEFORE YOU BEGIN

⚠ **WARNING**

- **Turn off the power at the circuit breaker** before installing, changing bulbs or cleaning the fixture.
- Installation by a **qualified electrician** is recommended. Install in accordance with local electrical codes.
- LED light source, 50 W, 3000K. No bulbs to replace.
- Do not clean the fixture with corrosive substances such as gasoline or alcohol-based disinfectants.
- Use this fixture only for its intended purpose. Do not modify or rewire it.
- Keep small parts and packaging away from children. They can cause serious injury.


PREPARATION

- Read every step carefully and follow them in order.
- Unpack and check all parts against the parts list. If anything is missing or damaged, contact us before installing (see the last page). We will send replacement parts promptly.
- Assemble the fixture where it will be installed. Moving it mid-assembly risks losing small parts.
- This guide shows one size. Other sizes in the same series install the same way.

SPECIFICATIONS

LIGHT SOURCE	WATTAGE	COLOR TEMPERATURE
LED	**50 W**	**3000K**

IN THE BOX

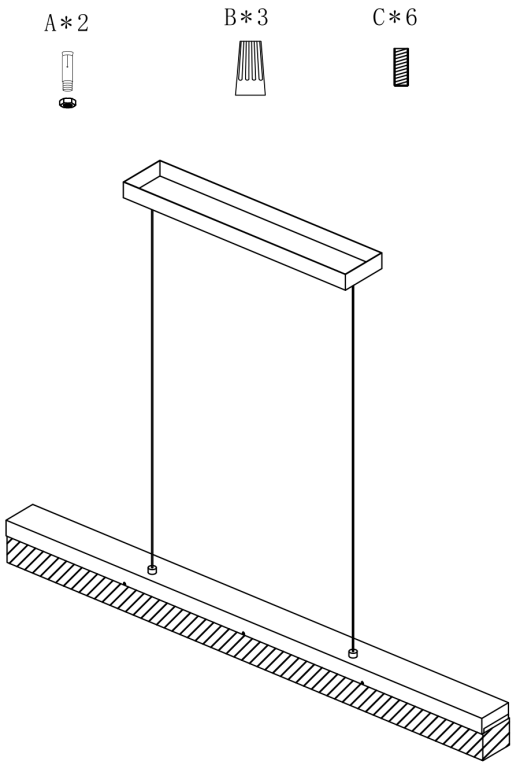


PART	QTY	DESCRIPTION
A	× 2	Mounting screw with nut
B	× 3	Wire connector
C	× 6	Alabaster fixing screw
—	× 1	Chandelier body

INSTALLATION

STEP 1

Mount the bracket


Turn off the power at the circuit breaker. Take the mounting bracket out of the canopy and fix it to the ceiling junction box with the screws.

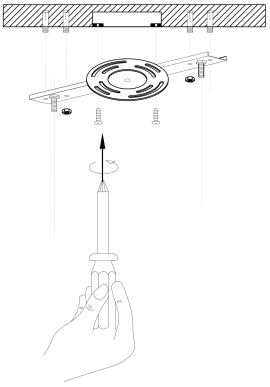

STEP 2

Connect and secure the canopy


Take out the chandelier body. Join the fixture wires to the matching house supply wires with the wire connectors (B): live to live, neutral to neutral, ground to ground. Lift the canopy up to the bracket and fasten it with the mounting screws (A) and nuts.

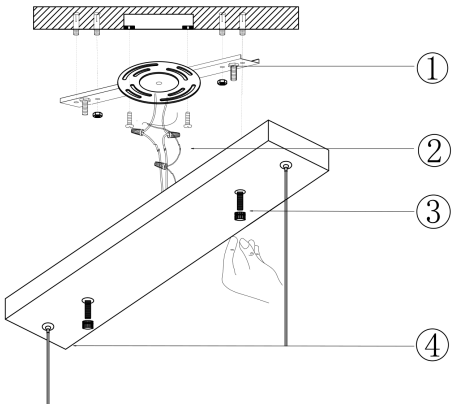

STEP 3

Fit the alabaster and set the height

Lift the alabaster bar up to the underside of the frame and tighten the screws (C) with the hex key to secure it. Press and hold the button on each cable grip and slide the cable to set the height you want. Make sure the fixture hangs level, then restore power and switch on to test.

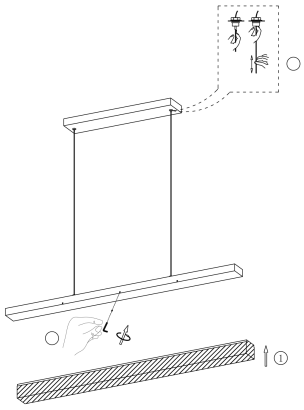

CARE & SUPPORT

CLEANING & CARE

- Clean the fixture about once a month to keep it looking its best.
- Turn off the power and let the fixture cool to room temperature first.
- Wipe with a soft cloth dampened with water and wrung dry. Never spray liquid directly onto the fixture.
- Do not use gasoline, alcohol or other corrosive cleaners.

GOOD TO KNOW

- Use the fixture only as designed. Damage caused by modification, third-party parts or natural disasters is not covered.
- Warranty terms are listed at yiosilamp.com.
- Natural alabaster varies piece to piece. Veining and tone differences are part of its character.

NEED HELP?

support@yiosilamp.com

+1 970-896-9411

Missing parts, installation questions or anything else, we are here to help. Please include your order number and a photo of the issue so we can resolve it quickly.