
YIOSI

INSTALLATION GUIDE

Bubble Glass 8-Light Round Pendant D1000

CHANDELIER · CEILING MOUNT

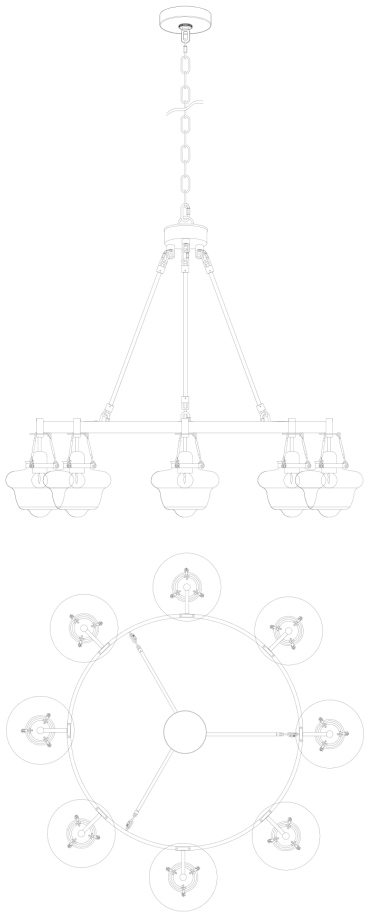

Model **YIOSI-0888**

Please read this guide completely before you begin, and keep it for future reference.

BEFORE YOU BEGIN

⚠ **WARNING**

- **Turn off the power at the circuit breaker** before installing, changing bulbs or cleaning the fixture.
- Installation by a **qualified electrician** is recommended. Install in accordance with local electrical codes.
- This fixture uses 8 E26 bulbs (4 W, 2700K, included). Replace only with bulbs of the same rating.
- Do not clean the fixture with corrosive substances such as gasoline or alcohol-based disinfectants.
- Use this fixture only for its intended purpose. Do not modify or rewire it.
- Keep small parts and packaging away from children. They can cause serious injury.


PREPARATION

- Read every step carefully and follow them in order.
- Unpack and check all parts against the parts list. If anything is missing or damaged, contact us before installing (see the last page). We will send replacement parts promptly.
- Assemble the fixture where it will be installed. Moving it mid-assembly risks losing small parts.

SPECIFICATIONS

LIGHT SOURCE	WATTAGE	COLOR TEMPERATURE
8 × E26 bulbs (included)	**4 W per bulb**	**2700K**

IN THE BOX

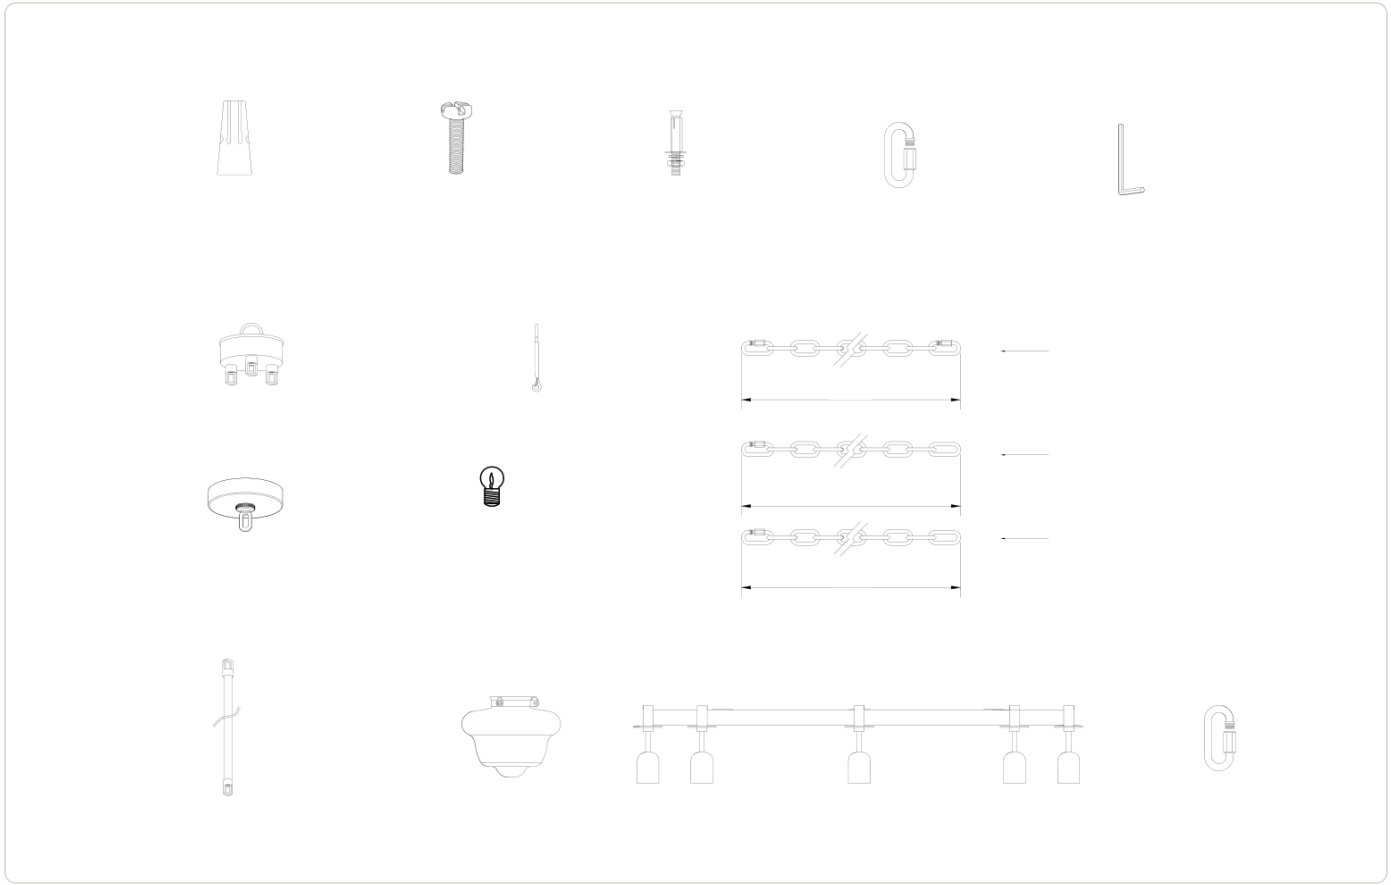

PART	QTY	DESCRIPTION
A	× 1	Boom hub
B	× 27	Glass hook (incl. 3 spare)
C	× 1	Canopy
D	× 10	E26 bulb (incl. 2 spare)
E–G	× 1 ea.	Chains: 12" (E), 20" (F), 39" (G)
H	× 3	Boom
I	× 8	Bubble glass shade
J	× 1	Light frame
K	× 6	Chain link
—	× 1 set	Mounting hardware: screws, expansion bolts, wire connectors, hex key

INSTALLATION

STEP 1

Assemble the frame


Fix the three booms (H) to the light frame (J), then join their top ends to the boom hub (A).



STEP 2

Hang the fixture


Turn off the power at the circuit breaker. Fix the mounting plate to the ceiling with the expansion screws. Join the hub to the canopy (C) with a chain (E, F or G) and the chain links (K), and hang the fixture.

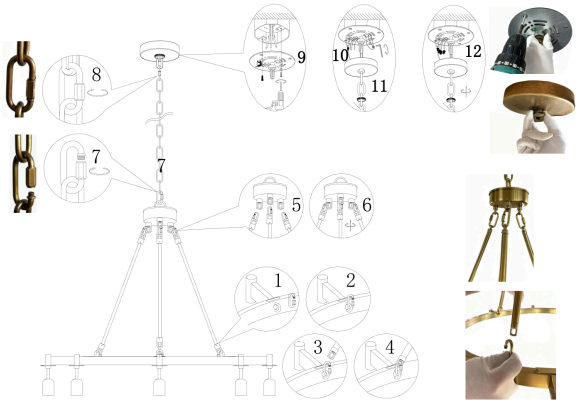

STEP 3

Connect and fit the bulbs

Join the fixture wires to the matching house supply wires with the wire connectors: live to live, neutral to neutral, ground to ground. Fasten the canopy, then screw in the 8 E26 bulbs (D).

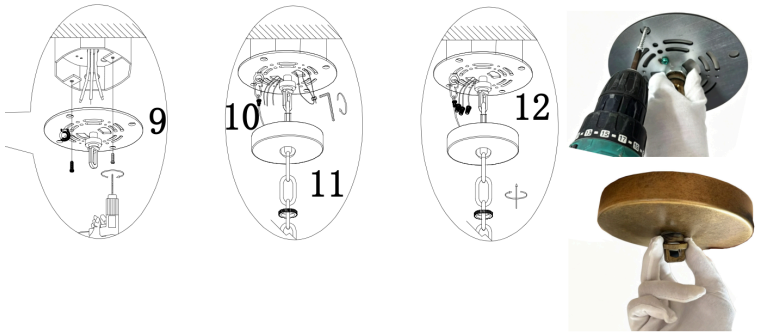

STEP 4

Hang the glass

Clip a hook (B) onto the rim of each glass shade (I), then hang the shade on the frame. Restore power and switch on to test.



CARE & SUPPORT

CLEANING & CARE

- Clean the fixture about once a month to keep it looking its best.
- Turn off the power and let the fixture cool to room temperature first.
- Wipe with a soft cloth dampened with water and wrung dry. Never spray liquid directly onto the fixture.
- Do not use gasoline, alcohol or other corrosive cleaners.

GOOD TO KNOW

- Use the fixture only as designed. Damage caused by modification, third-party parts or natural disasters is not covered.
- Warranty terms are listed at yiosilamp.com.

NEED HELP?

support@yiosilamp.com

+1 970-896-9411

Missing parts, installation questions or anything else, we are here to help. Please include your order number and a photo of the issue so we can resolve it quickly.