
YIOSI

INSTALLATION GUIDE

Heirloom Gold Amber Glass Round Pendant D860

CHANDELIER · CEILING MOUNT

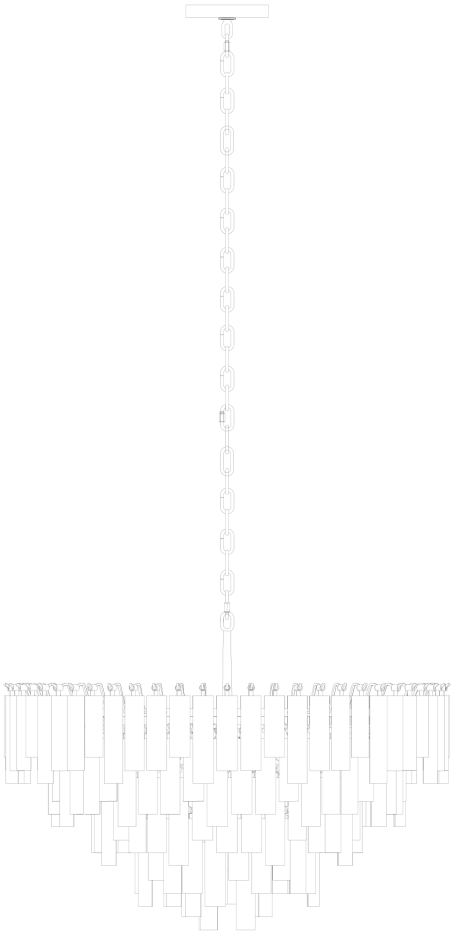

Model **YIOSI-0882**

Please read this guide completely before you begin, and keep it for future reference.

BEFORE YOU BEGIN

⚠ **WARNING**

- **Turn off the power at the circuit breaker** before installing, changing bulbs or cleaning the fixture.
- Installation by a **qualified electrician** is recommended. Install in accordance with local electrical codes.
- This fixture uses 13 E12 bulbs (3 W, 2700K bulbs included), max. 40 W each. Do not exceed the rated wattage.
- Do not clean the fixture with corrosive substances such as gasoline or alcohol-based disinfectants.
- Use this fixture only for its intended purpose. Do not modify or rewire it.
- Keep small parts and packaging away from children. They can cause serious injury.


PREPARATION

- Read every step carefully and follow them in order.
- Unpack and check all parts against the parts list. If anything is missing or damaged, contact us before installing (see the last page). We will send replacement parts promptly.
- Assemble the fixture where it will be installed. Moving it mid-assembly risks losing small parts.

SPECIFICATIONS

LIGHT SOURCE	MAX. WATTAGE	COLOR TEMPERATURE
13 × E12 bulbs (included)	**40 W per bulb**	**2700K (bulbs supplied)**

IN THE BOX

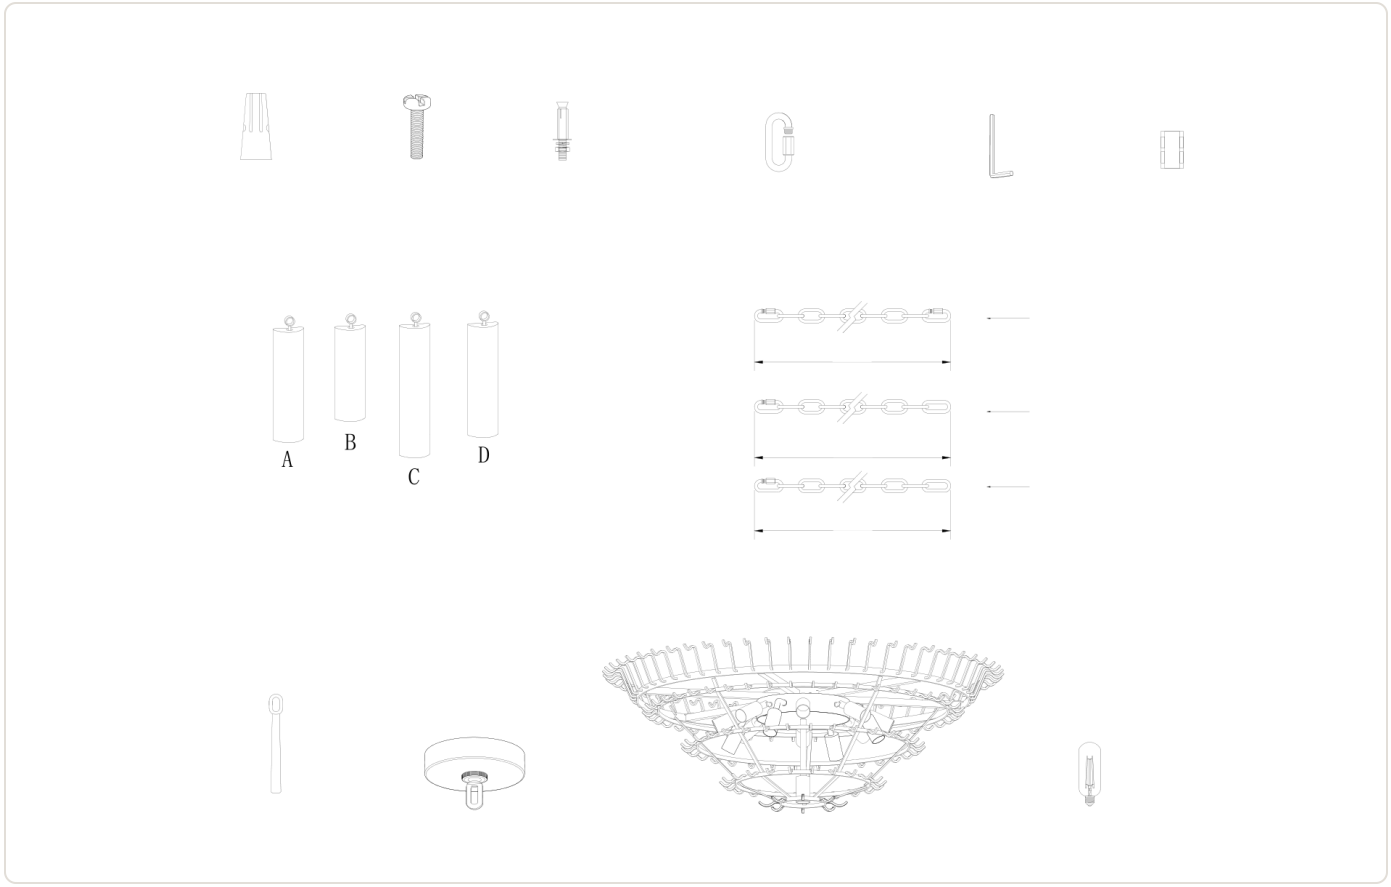


PART	QTY	DESCRIPTION
A	× 40	Metal tube, 5.7"
B	× 42	Glass tube, 4.7" (incl. 1 spare)
C	× 42	Glass tube, 6.7" (incl. 1 spare)
D	× 41	Glass tube, 5.7" (incl. 1 spare)
E–G	× 1 ea.	Chains: 12" (E), 20" (F), 39" (G)
H	× 1	Boom
I	× 1	Canopy
J	× 1	Light frame
K	× 15	E12 bulb (incl. 2 spare)
—	× 1 set	Mounting hardware: screws, expansion bolts, chain links, wire connectors, hex key

INSTALLATION

STEP 1

Fit the boom


Thread the power cord through the boom (H) and screw the boom onto the light frame (J).

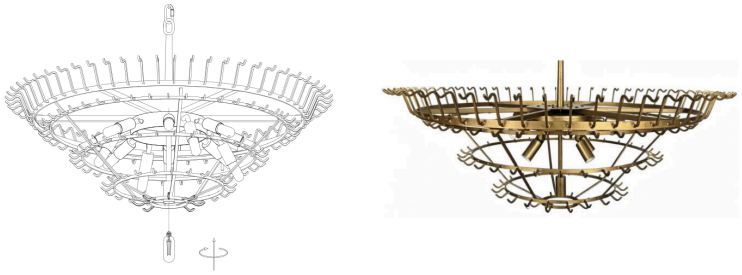

STEP 2

Hang the fixture


Turn off the power at the circuit breaker. Fix the mounting plate to the ceiling with the expansion screws. Join the boom to the canopy (I) with a chain (E, F or G) and the chain links, and hang the fixture.

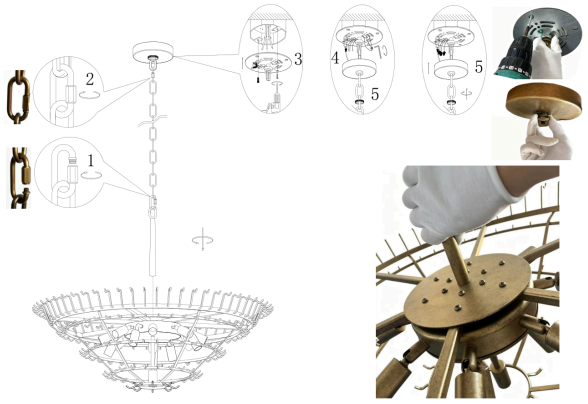

STEP 3

Connect and fit the bulbs


Join the fixture wires to the matching house supply wires with the wire connectors: live to live, neutral to neutral, ground to ground. Fasten the canopy, then screw in the 13 E12 bulbs (K).

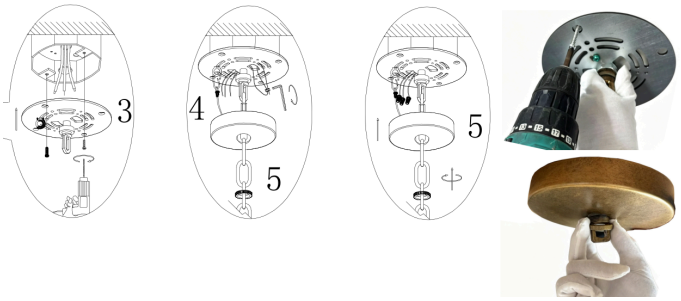

STEP 4

Hang the glass


Hang the tubes on the frame from the bottom tier up, as shown.

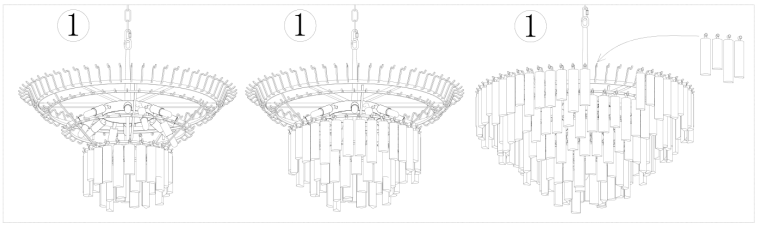

STEP 5

Follow the pattern

On each tier, hang the tubes in the repeating order A, B, C, D, as shown in the top view. Restore power and switch on to test.

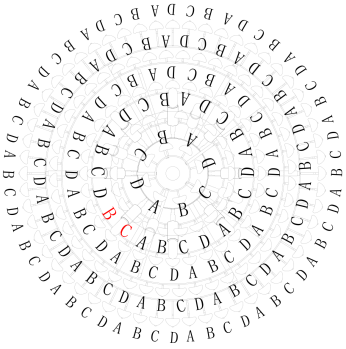



CARE & SUPPORT

CLEANING & CARE

- Clean the fixture about once a month to keep it looking its best.
- Turn off the power and let the fixture cool to room temperature first.
- Wipe with a soft cloth dampened with water and wrung dry. Never spray liquid directly onto the fixture.
- Do not use gasoline, alcohol or other corrosive cleaners.

GOOD TO KNOW

- Use the fixture only as designed. Damage caused by modification, third-party parts or natural disasters is not covered.
- Warranty terms are listed at yiosilamp.com.
- The amber glass is hand-finished, so slight differences in tone between tubes are normal.

NEED HELP?

support@yiosilamp.com

+1 970-896-9411

Missing parts, installation questions or anything else, we are here to help. Please include your order number and a photo of the issue so we can resolve it quickly.